

Scilab Manual for
Signals and Systems
by Dr Dr. R. Anjana
Electrical Engineering
Laxmi Institute Of Technology, Sarigam,
Gujarat¹

Solutions provided by
Dr Dr. R. Anjana
Electrical Engineering
Laxmi Institute Of Technology, Sarigam, Gujarat

June 3, 2026

¹Funded by a grant from the National Mission on Education through ICT, <http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website <http://scilab.in>

Contents

List of Scilab Solutions	4
1 Waveform generation for continuous signals	6
2 Waveform generation for Discrete signals	10
3 Basic Operations on DT signals	14
4 ADDITION AND MULTIPLICATION ON DT SIGNALS	18
5 EVEN and ODD SIGNALS	22
6 Linear and Non-linear Signals	25
7 Energy and Power Signal	29
8 Time Variance and Time Invariance	31
9 DISCRETE CONVOLUTION	34
10 Z- TRANSFORMS AND INVERSE Z - TRANSFORM	37
11 Fourier Transform	39
12 Fourier Series	43
13 Causal and Non-Causal	46
14 Sampling Theorem	48

15 Sampling rate Conversion

51

List of Experiments

Solution 1.01	PROGRAM TO GENERATE COMMON CONTINUOUS TIME SIGNALS	6
Solution 2.02	PROGRAM TO GENERATE COMMON DISCRETE TIME SIGNALS	10
Solution 3.03	TO PERFORM BASIC OPERATIONS ON DT SIGNALS	14
Solution 4.04	To perform addition and subtraction of the following two DT signals	18
Solution 5.05	EVEN and ODD SIGNALS	22
Solution 6.06	To find wheather the system is linear or non linear for the given signal	25
Solution 7.7	To find the energy and power of a signal	29
Solution 8.08	To find wheather the signal is time variant or time invariant for the signal	31
Solution 9.09	To perform discrete convolution for two given sequences	34
Solution 10.10	To find Z Transform and inverse Z Transform for the given sequence	37
Solution 11.11	Fourier Transform	39
Solution 12.12	Write a program to find the fourier series coefficients of a signal	43
Solution 13.13	To find whether the system is causal or non causal	46
Solution 14.14	To find the sampling theoram	48
Solution 15.15	Sampling Rate Conversion	51

List of Figures

1.1	PROGRAM TO GENERATE COMMON CONTINUOUS TIME SIGNALS	7
2.1	PROGRAM TO GENERATE COMMON DISCRETE TIME SIGNALS	11
3.1	TO PERFORM BASIC OPERATIONS ON DT SIGNALS	15
4.1	To perform addition and subtraction of the following two DT signals	19
5.1	EVEN and ODD SIGNALS	23
6.1	To find wheather the system is linear or non linear for the given signal	26
8.1	To find wheather the signal is time variant or time invariant for the signal	32
9.1	To perform discrete convolution for two given sequences	35
11.1	Fourier Transform	40
12.1	Write a program to find the fourier series coefficients of a signal	44
14.1	To find the sampling theoram	49

Experiment: 1

Waveform generation for continuous signals

Scilab code Solution 1.01 PROGRAM TO GENERATE COMMON CONTINUOUS TIME SIGNALS

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3 // CAPTION: PROGRAM TO GENERATE COMMON CONTINUOUS
  TIME SIGNALS
4
5 //UNIT IMPULSE SIGNAL
6 clc;
7 clear all;
8 close;
9 N=5; //SET LIMIT
10 t1=-5:5;
11 x1=[zeros(1,N),ones(1,1),zeros(1,N)];
12 subplot(2,3,1);
13 plot(t1,x1)
14 xlabel('time');
15 ylabel('Amplitude');
```

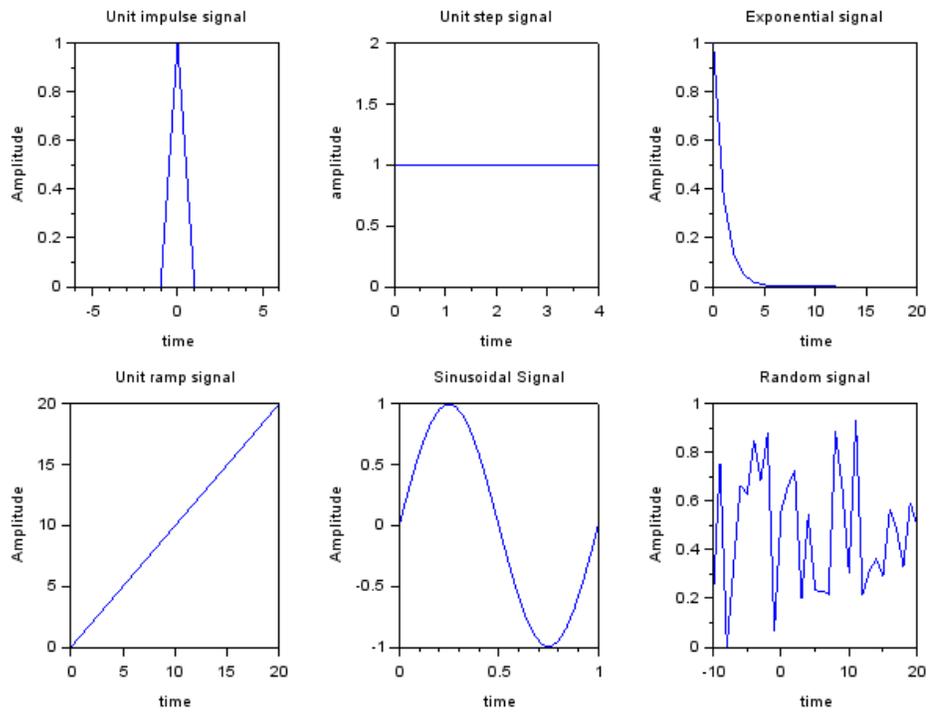


Figure 1.1: PROGRAM TO GENERATE COMMON CONTINUOUS TIME SIGNALS

```

16 title('Unit impulse signal');
17
18
19
20 //UNIT STEP SIGNAL
21 t2=0:4;
22 x2=ones(1,5);
23 subplot(2,3,2);
24 plot(t2,x2);
25 xlabel('time');
26 ylabel('amplitude');
27 title('Unit Step Continuous Signal');
28
29 title('Unit step signal');
30
31 //EXPONENTIAL SIGNAL
32 t3=0:1:20;
33 x3=exp(-t3);
34 subplot(2,3,3);
35 plot(t3,x3);
36 xlabel('time');
37 ylabel('Amplitude');
38 title('Exponential signal');
39
40
41
42 //UNIT RAMP SIGNAL
43 t4=-0:20;
44 x4=t4;
45 subplot(2,3,4);
46 plot(t4,x4);
47 xlabel('time');
48 ylabel('Amplitude');
49 title('Unit ramp signal');
50
51 //SINUSOIDAL SIGNAL
52 t5=0:0.04:1;
53 x5=sin(2*pi*t5);

```

```
54 subplot(2,3,5);
55 plot(t5,x5);
56 title('Sinusoidal Signal')
57 xlabel('time');
58 ylabel('Amplitude');
59
60 //RANDOM SIGNAL
61 t6=-10:1:20;
62 x6=rand(1,31);
63 subplot(2,3,6);
64 plot(t6,x6);
65 xlabel('time');
66 ylabel('Amplitude');
67 title('Random signal');
```

Experiment: 2

Waveform generation for Discrete signals

Scilab code Solution 2.02 PROGRAM TO GENERATE COMMON DISCRETE TIME SIGNALS

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3 // CAPTION: PROGRAM TO GENERATE COMMON DISCRETE TIME
  SIGNALS
4
5 //UNIT IMPULSE SIGNAL
6 clc;
7 clear all;
8 close;
9 N=5; //SET LIMIT
10 t1=-5:5;
11 x1=[zeros(1,N),ones(1,1),zeros(1,N)];
12 subplot(2,4,1);
13 plot2d3(t1,x1)
14 xlabel('time');
15 ylabel('Amplitude');
```

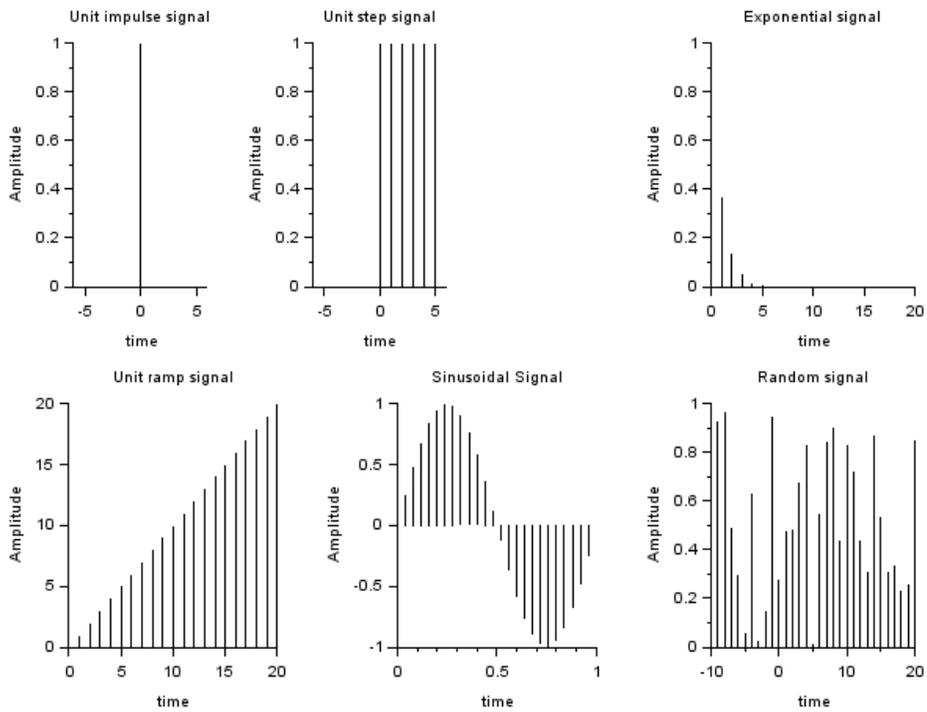


Figure 2.1: PROGRAM TO GENERATE COMMON DISCRETE TIME SIGNALS

```

16 title('Unit impulse signal');
17
18
19 //UNIT STEP SIGNAL
20 t2=-5:5;
21 x2=[zeros(1,N),ones(1,N+1)];
22 subplot(2,4,2);
23 plot2d3(t2,x2)
24 xlabel('time');
25 ylabel('Amplitude');
26 title('Unit step signal');
27
28 //EXPONENTIAL SIGNAL
29 t3=0:1:20;
30 x3=exp(-t3);
31 subplot(2,3,3);
32 plot2d3(t3,x3);
33 xlabel('time');
34 ylabel('Amplitude');
35 title('Exponential signal');
36
37
38
39 //UNIT RAMP SIGNAL
40 t4=0:20;
41 x4=t4;
42 subplot(2,3,4);
43 plot2d3(t4,x4);
44 xlabel('time');
45 ylabel('Amplitude');
46 title('Unit ramp signal');
47
48 //SINUSOIDAL SIGNAL
49 t5=0:0.04:1;
50 x5=sin(2*pi*t5);
51 subplot(2,3,5);
52 plot2d3(t5,x5);
53 title('Sinusoidal Signal')

```

```
54 xlabel('time');
55 ylabel('Amplitude');
56
57 //RANDOM SIGNAL
58 t6=-10:1:20;
59 x6=rand(1,31);
60 subplot(2,3,6);
61 plot2d3(t6,x6);
62 xlabel('time');
63 ylabel('Amplitude');
64 title('Random signal');
```

Experiment: 3

Basic Operations on DT signals

Scilab code Solution 3.03 TO PERFORM BASIC OPERATIONS ON DT SIGNALS

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION:TO PERFORM BASIC OPERATIONS ON D.T SIGNALS
5
6 clc;
7 clear all;
8 close;
9
10 //amplification
11 x=input('Enter input sequence x:');
12 a=input('Enter amplification factor a:');
13 b=input('Enter attenuation factor b:');
14 c=input('Enter amplitude reversal factor c:');
15 y1=a*x;
16 y2=b*x;
17 y3=c*x;
18 n=length(x);
```

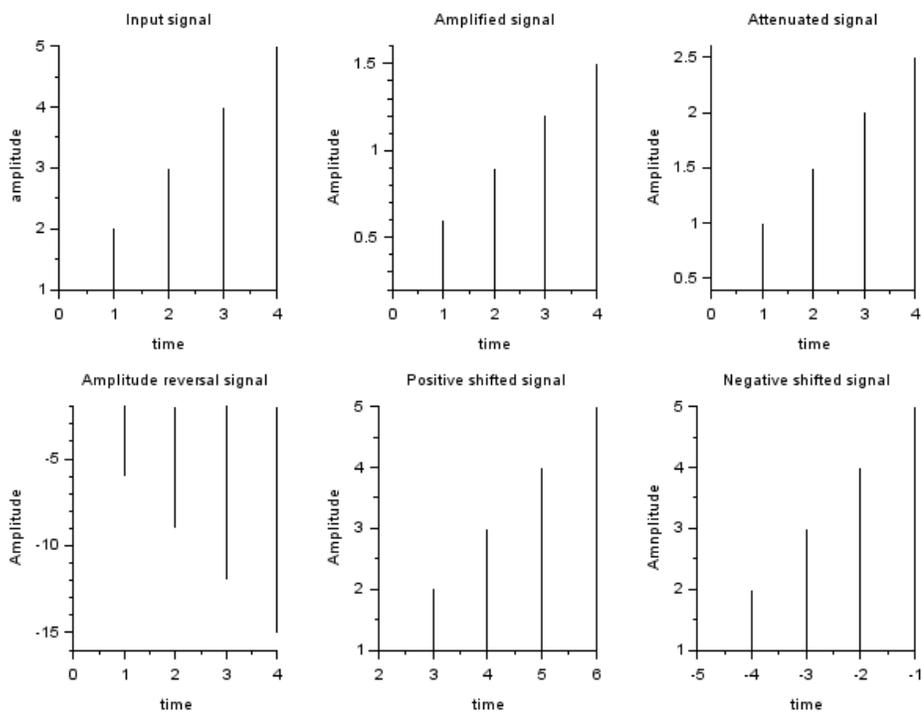


Figure 3.1: TO PERFORM BASIC OPERATIONS ON DT SIGNALS

```

19
20 //Input signal plot
21 subplot(2,3,1);
22 plot2d3(0:n-1,x);
23 xlabel('time');
24 ylabel('amplitude');
25 title('Input signal');
26
27 //Amplification
28 subplot(2,3,2);
29 plot2d3(0:n-1,y1);
30 xlabel('time');
31 ylabel('Amplitude');
32 title('Amplified signal');
33
34 //attenuation
35 subplot(2,3,3);
36 plot2d3(0:n-1,y2);
37 xlabel('time');
38 ylabel('Amplitude');
39 title('Attenuated signal');
40
41 //Amplitude Reversal
42 subplot(2,3,4);
43 plot2d3(0:n-1,y3);
44 xlabel('time');
45 ylabel('Amplitude');
46 title('Amplitude reversal signal');
47
48 // folding and Shifting
49
50 n0=input('Enter the +ve shift:');
51 n1=input('Enter the -ve shift:');
52 l=length(x);
53 i=n0:l+n0-1;
54 j=n1:l+n1-1;
55 subplot(2,3,5);
56 plot2d3(i,x);

```

```

57 xlabel('time');
58 ylabel('Amplitude');
59 title('Positive shifted signal');
60 subplot(2,3,6);
61 plot2d3(j,x);
62 xlabel('time');
63 ylabel('Amnplitude');
64 title('Negative shifted signal');
65
66
67 //*****//
68 //INPUT: In Console Window
69 // *****//
70
71 //Enter the Input Sequence x(n)=[1 2 3 4 5]
72 //Enter the amplification factor a = 0.3
73 //Enter the attenuation factor b = 0.5
74 //Enter the amplitude reversal factor c = -3
75 //Enter the positive shift : 2
76 //Enter the negative shift : -5
77
78 //OUTPUT: In Graphic Windows

```

Experiment: 4

ADDITION AND MULTIPLICATION ON DT SIGNALS

Scilab code Solution 4.04 To perform addition and subtraction of the following two DT signals

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: To perform addition and subtraction of
   the following two DT signals
5 //Xa(t) = 1; 0<t<1
6 //      2; 1<t<2;
7 //      1; 2<t<3
8
9 // &
10 // Xb(t) = t; 0<t<1
11 //      1; 1<t<2;
12 //      3-t; 2<t<3
13
```

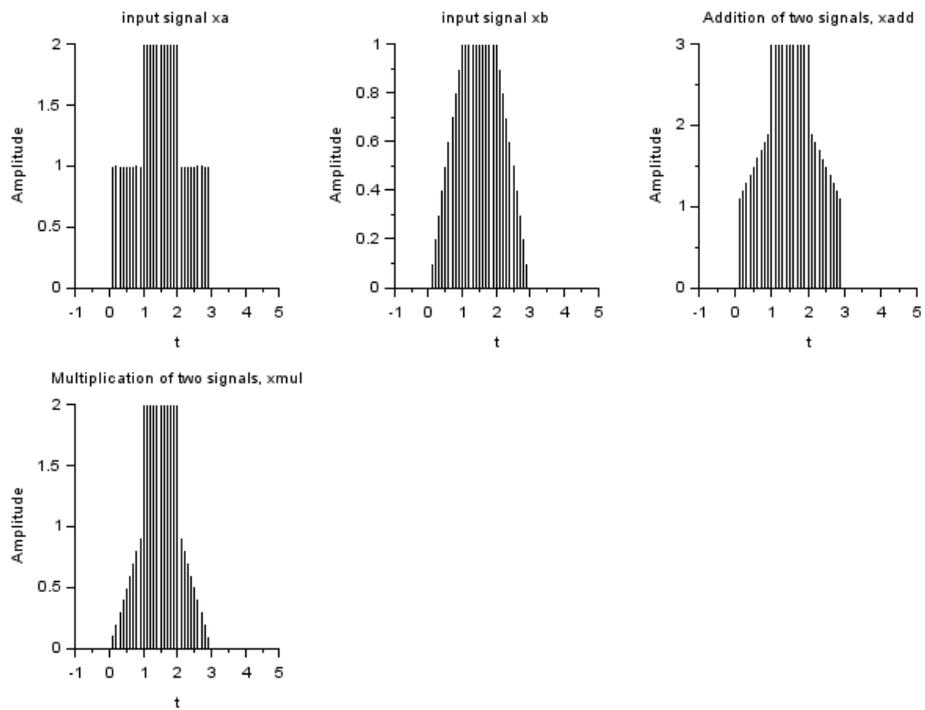


Figure 4.1: To perform addition and subtraction of the following two DT signals

```

14 //
    ///*****////////////////////////////////////
15
16 clc;
17 clear all;
18 close
19 t = -1:0.1:5;
20 x1 = 1;
21 x2 = 2;
22 x3 = 3-t;
23
24 xa = x1.*(t>0 & t<1) + x2.*(t>=1 & t<=2) + x1.*(t>2
    & t<3);
25 xb = t.*(t>0 &t<1) + x1*(t>=1 &t<=2)+x3.*(t>2 &t<3);
26
27 xadd = xa +xb;
28 xmul = xa.*xb;
29 subplot(2,3,1);
30 plot2d3(t,xa) //Plots input signal xa
31 xlabel('t');
32 ylabel('Amplitude');
33 title('input signal xa');
34 subplot(2,3,2);
35 plot2d3(t,xb) //Plots input signal xb
36 xlabel('t');
37 ylabel('Amplitude');
38 title('input signal xb');
39 subplot(2,3,3);
40 plot2d3(t,xadd) //Plots addition of signal xa and
    xb
41 xlabel('t');
42 ylabel('Amplitude');
43 title('Addition of two signals , xadd');
44 subplot(2,3,4);
45 plot2d3(t,xmul) //Plots Multiplication of signal xa
    and xb
46 xlabel('t');

```

```
47 ylabel('Amplitude');
48 title('Multiplication of two signals , xmul');
49
50 //// Output : In Graphic Window
```

Experiment: 5

EVEN and ODD SIGNALS

Scilab code Solution 5.05 EVEN and ODD SIGNALS

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: EVEN and ODD SIGNALS for  $x(t)=\sin(t)+\cos(t)$ 
   (t)
5
6 clc;
7 close;
8 clear all;
9 t=0:.005:4*%pi;
10 x=sin(t)+cos(t); // Given signal:  $x(t)=\sin(t)+\cos(t)$ 
   )
11 subplot(2,2,1)
12 plot(t,x)
13 xlabel('t');
14 ylabel('amplitude')
15 title('input signal')
16 y=sin(-t)+cos(-t) // Put  $t = -t$  in  $x(t)$ 
17 subplot(2,2,2)
```

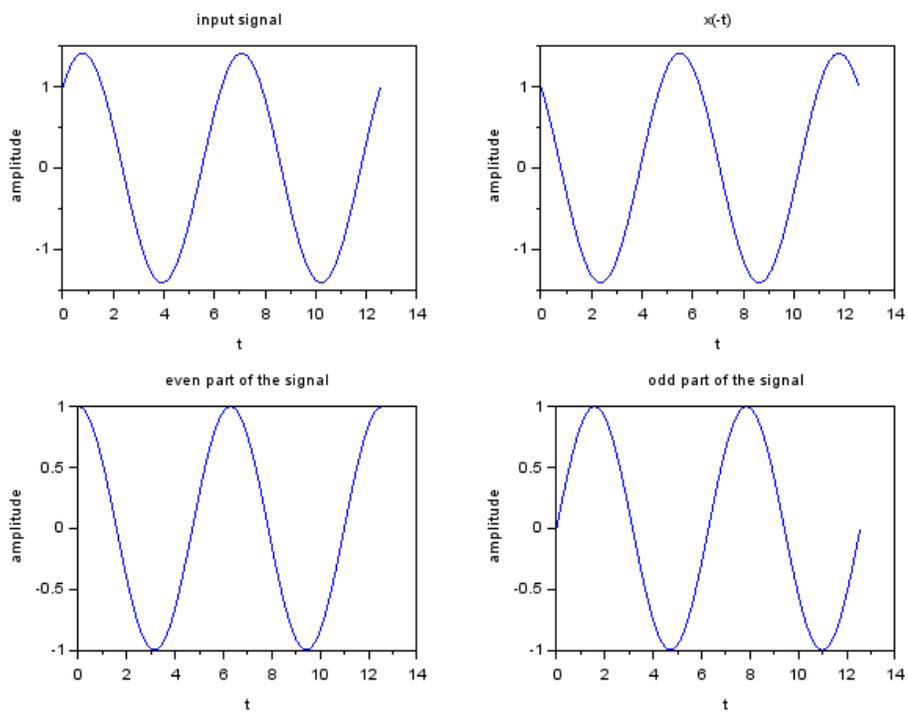


Figure 5.1: EVEN and ODD SIGNALS

```
18 plot(t,y)
19 xlabel('t');
20 ylabel('amplitude')
21 title('x(-t)')
22 z=x+y
23 subplot(2,2,3)
24 plot(t,z/2) // to plot even signal
25 xlabel('t');
26 ylabel('amplitude')
27 title('even part of the signal')
28 p=x-y
29 subplot(2,2,4)
30 plot(t,p/2) // to plot odds signal
31 xlabel('t');
32 ylabel('amplitude');
33 title('odd part of the signal');
34
35 //Output: In graphic window
```

Experiment: 6

Linear and Non-linear Signals

Scilab code Solution 6.06 To find wheather the system is linear or non linear for the given signal

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: To find wheather the system is linear or
   non linear for the given signal  $y(n)=[x(n)]^2+B$ ;
5
6 clc;
7 clear all;
8 close;
9
10 //Properties of DT Systems(Linearity)
11 // $y(n)=[x(n)]^2+B$ ;
12
13 x1=input('Enter first input sequence:');
14 n=length(x1);
15 x2=input('Enter second input sequence:');
16 a=input('Enter scaling constant(a):');
17 b=input('Enter scaling constant(b):');
```

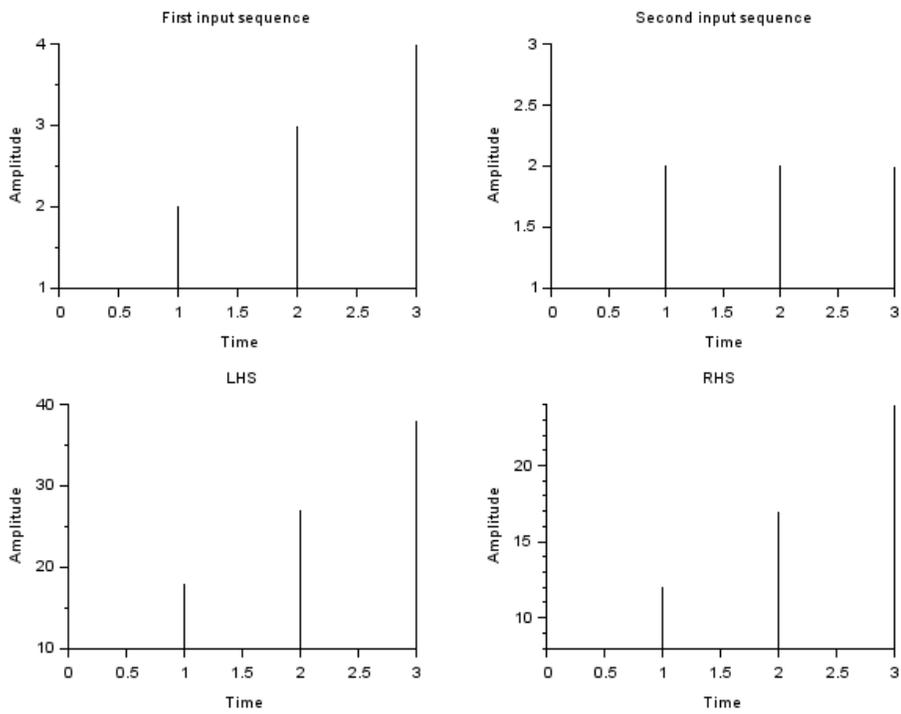


Figure 6.1: To find whether the system is linear or non linear for the given signal

```

18 B=input('Enter scaling constant(B):');
19
20 y1=x1.^2+B;
21 y2=x2.^2+B;
22 rhs=a*y1+b*y2;
23 x3=a*x1+b*x2;
24 lhs=x3.^2+B;
25
26 subplot(2,2,1);
27 plot2d3(0:n-1,x1);
28 xlabel('Time');
29 ylabel('Amplitude');
30 title('First input sequence');
31 subplot(2,2,2);
32 plot2d3(0:n-1,x2);
33 xlabel('Time');
34 ylabel('Amplitude');
35 title('Second input sequence');
36 subplot(2,2,3);
37 plot2d3(0:n-1,lhs);
38 xlabel('Time');
39 ylabel('Amplitude');
40 title('LHS');
41 subplot(2,2,4);
42 plot2d3(0:n-1,rhs);
43 xlabel('Time');
44 ylabel('Amplitude');
45 title('RHS');
46
47 if(lhs==rhs)
48     disp('system is linear');
49 else
50     disp('system is non-linear');
51
52 end;
53
54
55 //// Input Data

```

```
56
57 //Enter first input sequence:[1 2 3 4]
58 //Enter second input sequence:[ 2 2 2 2 ]
59 //Enter scaling constant(a):1
60 //Enter scaling constant(b):1
61 //Enter scaling constant(B):2
62
63 /// Output: system is non-linear
64 //See graphic window
```

Experiment: 7

Energy and Power Signal

Scilab code Solution 7.7 To find the energy and power of a signal

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: To find the energy and power of a signal
5
6
7 //To find energy of a signal
8 clc;
9 clear all;
10 close;
11 E =0;
12 for n =0:50
13 x ( n +1) =( 0.5) ^ n ;
14 end
15 for n =0:100
16 E = E + x (n +1) ^2;
17 end
18 if E < %inf then
19 disp (E , 'The Energy of the given signal is E = ')
20 ;
21 else
```

```

21  disp ( 'The given signal is energy signal is not an
      Energy Signal' ) ;
22  end
23
24  ///// To find power of the Signal
25  T=10;          //Total evaluation time
26  Ts=0.001;     //Sampling time => 1000 samples per
      second
27  Fs=1/Ts;      //Sampling period
28  t=[0:Ts:T];   //define simulation time
29  x=cos(2*pi*100*t)+cos(2*pi*200*t)+sin(2*pi*300*t)
      ;
30  power = (norm(x)^2)/length(x);
31  disp(power, 'The power of the given signal is P = ')
32
33
34  // output
35  //The Energy of the given signal is E =51.333333
36
37  // The power of the given signal is P = 1.50025

```

Experiment: 8

Time Variance and Time Invariance

Scilab code Solution 8.08 To find wheather the signal is time variant or time invariant for the signal

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: To find wheather the signal is time
   variant or time invariant for the signal  $y(n)=n*[$ 
    $x(n)]$ ;
5 clc;
6 clear all;
7 close ;
8 x1=input('Enter input sequence x1:');
9 n1=length(x1);
10 for n=1:n1
11     y1(n1)=n.*x1(n);
12 end;
13 n0=input('Enter shift:');
14 x2=[zeros(1,n0),x1];
```

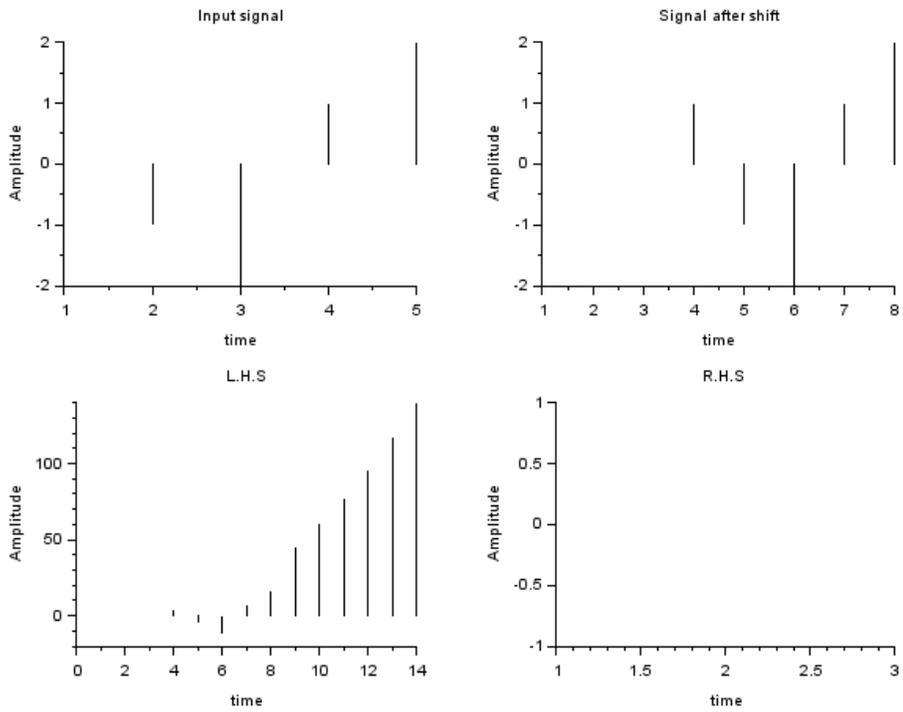


Figure 8.1: To find whether the signal is time variant or time invariant for the signal

```

15 for n2=1:n1+n0
16     y2(n2)=n2.*x2(n2);
17 end;
18 y3=[zeros(1,n0)],y1;
19 if(y2==y3)
20     disp('system is time invariant');
21 else
22     disp('system is time variant');
23 end;
24 subplot(2,2,1);
25 plot2d3(x1);
26 xlabel('time');
27 ylabel('Amplitude');
28 title('Input signal');
29 subplot(2,2,2);
30 plot2d3(x2);
31 xlabel('time');
32 ylabel('Amplitude');
33 title('Signal after shift');
34 subplot(2,2,3);
35 plot2d3(y2);
36 xlabel('time');
37 ylabel('Amplitude');
38 title('L.H.S');
39 subplot(2,2,4);
40 plot2d3(y3);
41 xlabel('time');
42 ylabel('Amplitude');
43 title('R.H.S');
44
45
46 //// Sample Input
47 ///Enter input sequence x1:[1 -1 -2 1 2]
48 //Enter shift:3
49
50 // Output
51 //system is time variant

```

Experiment: 9

DISCRETE CONVOLUTION

Scilab code Solution 9.09 To perform discrete convolution for two given sequences

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: To perform discrete convolution for two
   given sequences
5
6 clc;
7 clear all;
8 close ;
9 a=input('Enter the starting point of x[n]=');
10 b=input('Enter the starting point of h[n]=');
11 x=input('Enter the co-efficients of x[n]=');
12 h=input('Enter the co-efficients of h[n]=');
13 y=conv(x,h);
14 subplot(3,1,1);
15 p=a:(a+length(x)-1);
16 plot2d3(p,x);
17 xlabel('Time');
```

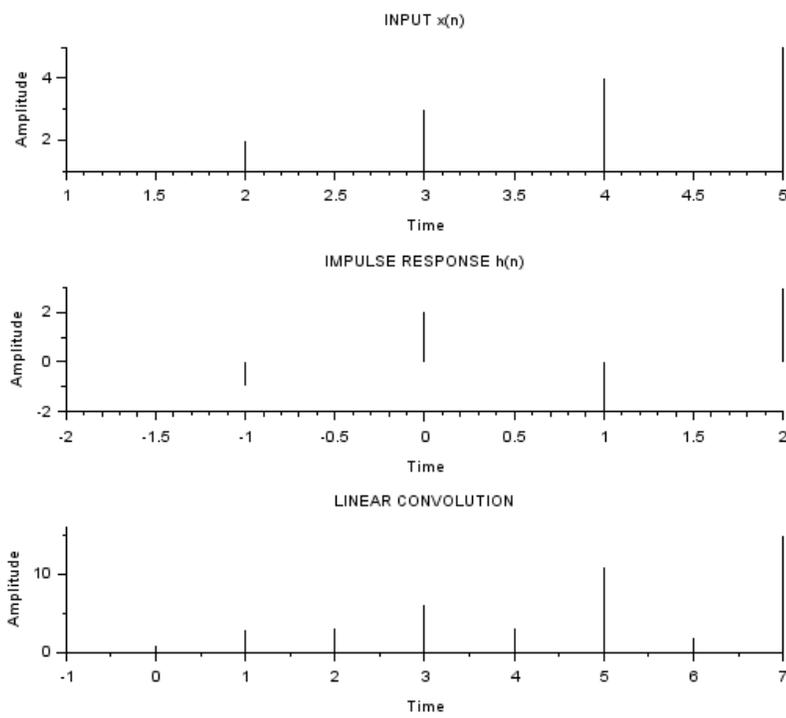


Figure 9.1: To perform discrete convolution for two given sequences

```

18  ylabel('Amplitude');
19  title('INPUT x(n)');
20  subplot(3,1,2);
21  q=b:(b+length(h)-1);
22  plot2d3(q,h);
23  xlabel('Time');
24  ylabel('Amplitude');
25  title('IMPULSE RESPONSE h(n)');
26  subplot(3,1,3);
27  n=a+b:length(y)+a+b-1;
28  plot2d3(n,y);
29
30  disp(y)
31  xlabel('Time');
32  ylabel('Amplitude');
33  title('LINEAR CONVOLUTION');
34
35  ///Sample Input
36  //Enter the starting point of x[n]=1
37  //Enter the starting point of h[n]=-2
38  //Enter the co-efficients of x[n]=[1 2 3 4 5]
39  //Enter the co-efficients of h[n]=[1 -1 2 -2 3]
40
41  // output: See the Graphic window

```

Experiment: 10

Z- TRANSFORMS AND INVERSE Z - TRANSFORM

Scilab code Solution 10.10 To find Z Transform and inverse Z Transform for the given sequence

```
1
2 // VERSION: Scilab: 5.4.1
3 // OS: windows 7
4
5 //CAPTION: To find Z-Transform and inverse Z-
   Transform for the given sequence
6
7 // Z transform of given sequence
8 clear all;
9 clc ;
10 close ;
11 z = poly (0 , 'z' , 'r');
12 x1 = input('enter the input sequence:');
13 n1 = 0: length ( x1 ) -1;
14 X1 = x1.*[(1/ z ) .^n1];
15 disp(X1,'the z-transform of X1: ')
16
17
```

```

18 // Inverse Z-transform
19
20
21 z=%z;
22 a =(2+2* z+z ^2) ;
23 b=z^2;
24 h = ldiv (b,a ,6);
25 disp (h," The Inverse Z - Transform is");
26
27
28
29 // Sample input data
30
31 //enter the input sequence:[1 2 3 4 5]
32
33
34
35 // Output Data
36
37 //the z-transform of X1:
38
39 // 1      2      3      4      5
40 //  -      -      -      -      -
41 /////      2      3      4
42 // 1      z      z      z      z
43
44 // The Inverse Z - Transform is
45
46 // 1.
47 // - 2.
48 // 2.
49 // 0.
50 // - 4.
51 // 8.

```

Experiment: 11

Fourier Transform

Scilab code Solution 11.11 Fourier Transform

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION:A symmetrical rectangular pulse is given
   by  $R(n) = 1$  ;  $-N < n < N$  = 0 ; otherwise;
5 //Determine The DTFT for  $N = \{5,15,25,100\}$ . Scale
   the DTFT so that  $x(0) = 1$  ,also plot the
   normalized DTFT over  $-\pi$  to  $\pi$  .
6
7
8 clc;
9 clear all;
10 close
11 N=input('Enter The Value Of N1 = ');
12 n=-N:1:N;
13 x=ones(1,length(n));
14 w=(-%pi:(%pi/100):%pi);
15 z=x*exp(-i*n'*w);
16 subplot(2,2,1);
```

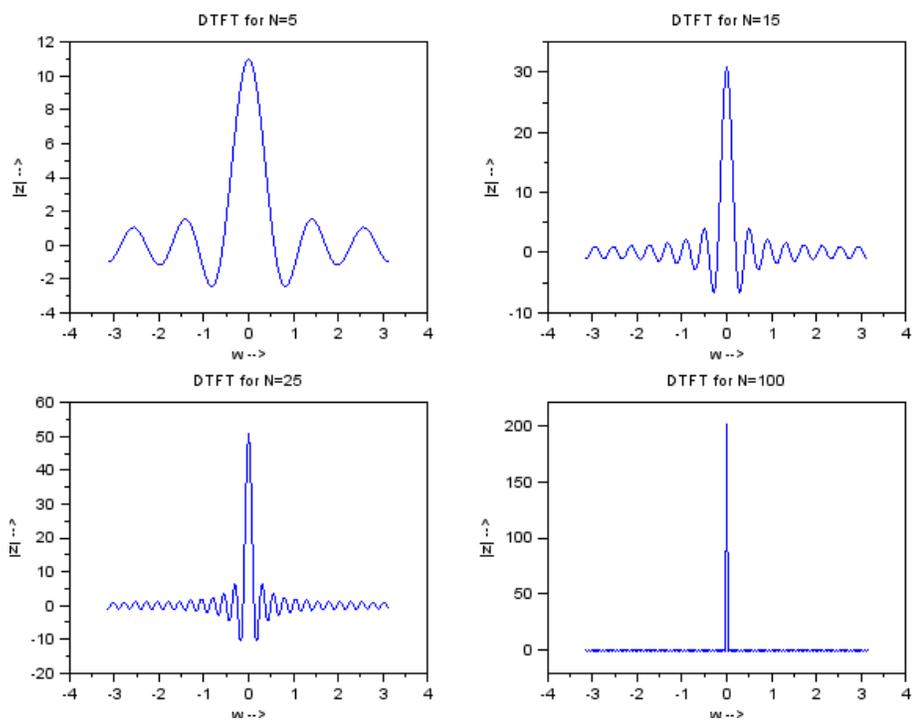


Figure 11.1: Fourier Transform

```

17 plot(w,z);
18 xlabel('w —>');
19 ylabel('|z| —>');
20 title('DTFT for N=5');
21
22 N=input('Enter The Value Of N2 = ');
23 n=-N:1:N;
24 x=ones(1,length(n));
25 w=(-%pi:(%pi/100):%pi);
26 z=x*exp(-%i*n'*w);
27 subplot(2,2,2);
28 plot(w,z);
29 xlabel('w —>');
30 ylabel('|z| —>');
31 title('DTFT for N=15');
32
33 N=input('Enter The Value Of N3 = ');
34 n=-N:1:N;
35 x=ones(1,length(n));
36 w=(-%pi:(%pi/100):%pi);
37 z=x*exp(-%i*n'*w);
38 subplot(2,2,3);
39 plot(w,z);
40 xlabel('w —>');
41 ylabel('|z| —>');
42 title('DTFT for N=25');
43
44 N=input('Enter The Value Of N4 = ');
45 n=-N:1:N;
46 x=ones(1,length(n));
47 w=(-%pi:(%pi/100):%pi);
48 z=x*exp(-%i*n'*w);
49 subplot(2,2,4);
50 plot(w,z);
51 xlabel('w —>');
52 ylabel('|z| —>');
53 title('DTFT for N=100');
54

```

```
55 ///////////////////////////////////////////////////  
56 /// SAMPLE INPUTS/////////  
57  
58 //Enter The Value Of N1 = 5  
59 //Enter The Value Of N2 = 15  
60 //Enter The Value Of N3 = 25  
61 //Enter The Value Of N4 = 100
```

Experiment: 12

Fourier Series

Scilab code Solution 12.12 Write a program to find the fourier series coefficients of a signal

```
1
2 // VERSION: Scilab: 5.4.1
3 // OS: windows 7
4
5 //CAPTION: Write a program to find the fourier
   series coefficients of a signal.
6
7 fig_size = [232 84 774 624];
8 x = [0.1 0.9 0.1]; // % 1 period of x(t)
9 x = [x x x x]; // % 4 periods of x(t)
10 tx = [-2 -1 0 0 1 2 2 3 4 4 5 6]; // % time points
   for x(t)
11 subplot(2,2,1)
12 plot(tx,x)
13 xlabel('Time (s)')
14 ylabel('Amplitude'),...
15 title('Periodic Signal x(t)')
16
```

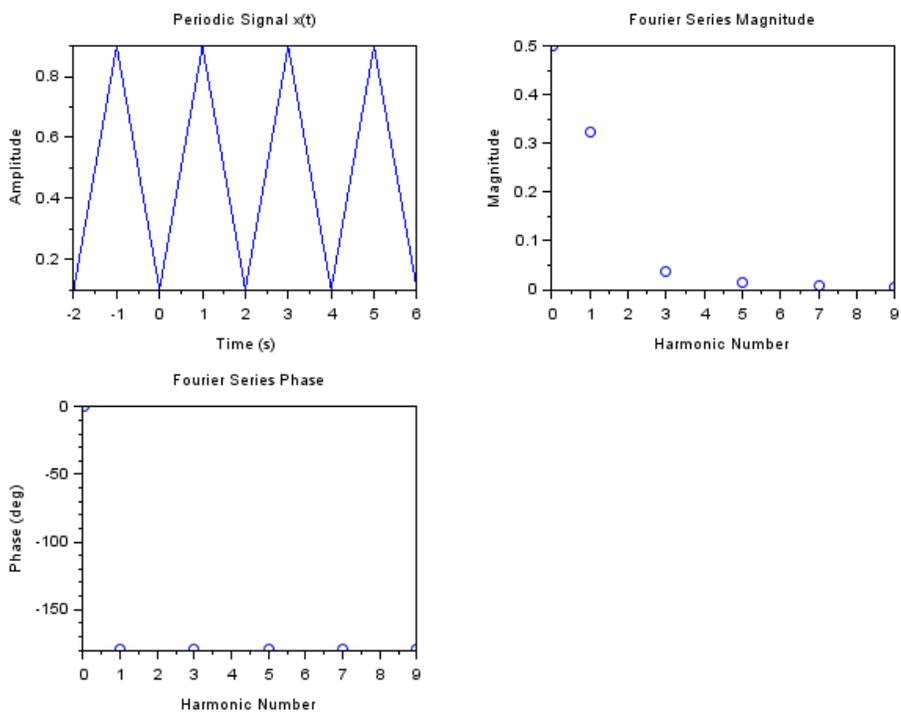


Figure 12.1: Write a program to find the fourier series coefficients of a signal

```

17 a0 = 0.5; // DC component of Fourier Series
18 ph0 = 0;
19 n = [1 3 5 7 9]; // Values of n to be evaluated
20 an = -3.2 ./ (%pi * n).^2; // % Fourier Series
    coefficients
21 mag_an = abs(an);
22 ph_an = -180 * ones(1,length(n));
23 n = [0 n];
24 mag_an = [a0 mag_an]; // % Including a0 with a_n
25 ph_an = [ph0 ph_an];
26
27 //Plotting fourier series magnitude
28 subplot(2,2,2)
29 plot(n,mag_an,'o');
30 xlabel('Harmonic Number');
31 ylabel('Magnitude');
32 title('Fourier Series Magnitude')
33
34 //Plotting fourier series phase
35 subplot(2,2,3)
36 plot(n,ph_an,'o')
37 xlabel('Harmonic Number')
38 ylabel('Phase (deg)')
39 title('Fourier Series Phase'),

```

Experiment: 13

Causal and Non-Causal

Scilab code Solution 13.13 To find whether the system is causal or non causal

```
1
2 // VERSION: Scilab: 5.4.1
3 // OS: windows 7
4
5 //CAPTION: To find whether the system is causal or
   non-causal
6
7 clc;
8 clear all;
9 close;
10 // %Properties of DT Systems(Causality)
11 //%y(n)=x(-n);
12
13 x1=input('Enter input sequence x1:');
14 n1=input('Enter upper limit n1:');
15 n2=input('Enter lower limit n2:');
16 flag=0;
17 for n=n1:n2
18     arg=-n;
19     if arg>n;
```

```
20         flag=1;
21     end;
22 end;
23 if(flag==1)
24     disp('system is causal');
25 else
26     disp('system is non-causal');
27     end
28
29 /// Sample inputs
30 ///Enter input sequence x1:[1 2 -1 3 -4 5 -5]
31 ///Enter upper limit n1:2
32 ///Enter lower limit n2:-2
33
34 /// output :
35 ///system is non-causal
```

Experiment: 14

Sampling Theorem

Scilab code Solution 14.14 To find the sampling theorem

```
1
2 // VERSION: Scilab: 5.4.1
3 // OS: windows 7
4
5 //CAPTION: To find the sampling theorem
6
7 clc;
8 T=0.04;
9 t=0:0.0005:0.02;
10 f = 1/T;
11 n1=0:40;
12 size(n1)
13 xa_t=sin(2*%pi*2*t/T);
14 subplot(2,2,1);
15 plot2d3(200*t,xa_t);
16 title('Verification of sampling theorem');
17 title('Continuous signal');
18 xlabel('t');
19 ylabel('x(t)');
```

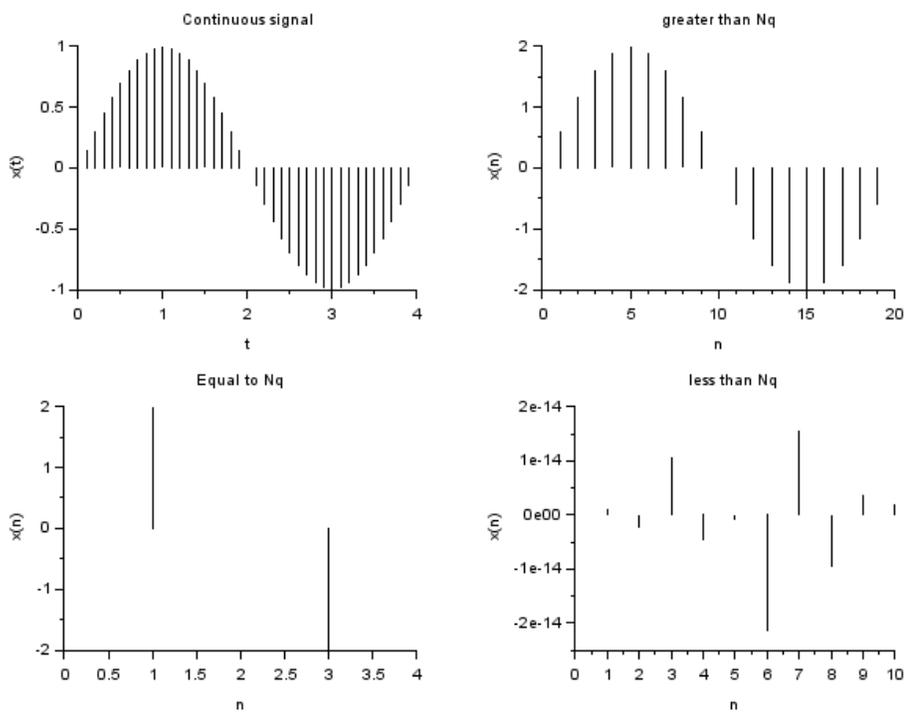


Figure 14.1: To find the sampling theorem

```

20
21 //greater than nyquist rate
22 ts1=0.002; //>niq rate
23 n=0:20;
24 x_ts1=2*sin(2*pi*n*ts1/T);
25 subplot(2,2,2);
26 plot2d3(n,x_ts1);
27 title('greater than Nq');
28 xlabel('n');
29 ylabel('x(n)');
30
31 //Equal to nyquist rate
32
33 ts2=0.01; //niq rate
34 n=0:4;
35 x_ts2=2*sin(2*pi*n*ts2/T);
36 subplot(2,2,3);
37 plot2d3(n,x_ts2);
38 title('Equal to Nq');
39 xlabel('n');
40 ylabel('x(n)');
41
42 //less than nyquist rate
43 ts3=0.1; //<niq rate
44 n=0:10;
45 x_ts3=2*sin(2*pi*n*ts3/T);
46 subplot(2,2,4);
47 plot2d3(n,x_ts3);
48 title('less than Nq');
49 xlabel('n');
50 ylabel('x(n)');

```

Experiment: 15

Sampling rate Conversion

Scilab code Solution 15.15 Sampling Rate Conversion

```
1 // VERSION: Scilab: 5.4.1
2 // OS: windows 7
3
4 //CAPTION: Sampling Rate Conversion
5
6 //Down Sampling (or Decimation):
7
8 xn = input(' Enter the number of samples xn: ');[1 2
    3 4 5 6 8 ]
9 N=length(xn);
10 n=0:1:N-1;
11 D=3;
12 xDn=xn(1:D:N);
13 n1=1:1:N/D;
14 //figure;
15 disp(xDn, 'the downsampling (or) Decimation for D = 3
    is:----->')
16
17 //Up Sampling (or Interpolation)
18 yn = input(' Enter the number of samples yn: ')///[1
    -2 3 4 8 9 10 44]
```

```

19 N=length(yn)
20 n=0:1:N-1
21 I=2
22 xIn=[zeros(1,I*N)]
23 n1=1:1:N*I
24 j=1:I:I*N
25 xIn(j)=yn
26 disp(xIn, 'The upsampling (or) interpolation for I =
      2 is:----->')
27
28
29 ///Sample Input
30
31 // Enter the number of samples xn:[1 2 3 4 5 6 8 ]
32 //Enter the number of samples yn:[1 -2 3 4 8 9 10
      44]
33
34
35 // Output Data
36 //////////////////////////////////////
37
38 //the downsampling (or) Decimation for D = 3 is
      :----->
39
40 //1.      4.      8.
41
42 //////////////////////////////////////
43
44 ///The upsampling (or) interpolation for I = 2 is
      :----->
45
46 //column 1 to 9
47
48 //      1.      0. - 2.      0.      3.      0.      4.      0.
      8.
49
50 //              column 10 to 16
51

```

52 // 0. 9. 0. 10. 0. 44. 0.
