

Scilab Manual for
Digital Signal Processing
by Ms E. Sangeetha Devi
Electronics Engineering
Periyar Maniammai University¹

Solutions provided by
Ms E.SANGEETHA DEVI
Electronics Engineering
PERIYAR MANIAMMAI UNIVERSITY, THANAJAVUR

June 17, 2026

¹Funded by a grant from the National Mission on Education through ICT, <http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website <http://scilab.in>

Contents

List of Scilab Solutions	3
1 GENERATION OF CONTINUOUS SIGNALS	6
2 GENERATION OF DISCRETE SIGNALS	15
3 GENERATION OF SINUSOIDAL SIGNALS	21
4 GENERATION OF COMPLEX EXPONENTIAL SIGNALS	23
5 EXPONENTIALLY GROWING & DECAYING SIGNAL	26
6 ADDITION OF TWO CONTINUOUS SIGNALS	30
7 ADDITION OF TWO DISCRETE SIGNALS	32
8 PROGRAM FOR SAMPLING PROCESS	35
9 PROGRAM FOR ALIASING PROCESS	38
10 LINEAR CONVOLUTION OF TWO SEQUENCES	40
11 CIRCULAR CONVOLUTION OF TWO SEQUENCES	42
12 DFT OF A SIGNAL	45
13 FFT OF A SIGNAL	49

List of Experiments

Solution 1.1	sinewave	6
Solution 1.2	cosine wave	6
Solution 1.3	triangular wave	10
Solution 1.4	signum function	10
Solution 1.5	sinc function	13
Solution 1.6	Exponential wave	13
Solution 2.1	unit impulse signal	15
Solution 2.2	unitstepsignal	15
Solution 2.3	discreteexponentialwave	19
Solution 2.4	unit ramp	19
Solution 3.1	Generation of sinusoidal signals	21
Solution 4.1	generation of complex exponential signals	23
Solution 5.1	Exponentially Growing signals	26
Solution 5.2	Exponentially decaying signals	27
Solution 6.1	Addition of two continuous signals	30
Solution 7.1	Addition of two discrete signals	32
Solution 8.1	sampling	35
Solution 9.1	Aliasing process	38
Solution 10.1	linear convolution of two sequences	40
Solution 11.1	circular convolution	42
Solution 12.1	DFT	45
Solution 13.1	fast fourier transform	49

List of Figures

1.1	sinewave	7
1.2	cosine wave	8
1.3	triangular wave	9
1.4	signum function	11
1.5	sinc function	12
1.6	Exponential wave	14
2.1	unit impulse signal	16
2.2	unitstepsignal	17
2.3	discreteexponentialwave	18
2.4	unit ramp	20
3.1	Generation of sinusoidal signals	22
4.1	generation of complex exponential signals	24
5.1	Exponentially Growing signals	27
5.2	Exponentially decaying signals	28
6.1	Addition of two continuous signals	31
7.1	Addition of two discrete signals	33
8.1	sampling	36
9.1	Aliasing process	39
10.1	linear convolution of two sequences	41
11.1	circular convolution	43
12.1	DFT	46

13.1 fast fourier transform	50
---------------------------------------	----

Experiment: 1

GENERATION OF CONTINUOUS SIGNALS

Scilab code Solution 1.1 sinewave

```
1  clc;  
2  clf;  
3  clear all;  
4  //Caption:generation of sine wave  
5  f=0.2;  
6  t=0:0.1:10;  
7  x=sin(2*%pi*t*f);  
8  plot(t,x);  
9  title('sine wave');  
10 xlabel('t');  
11 ylabel('x');
```

Scilab code Solution 1.2 cosine wave

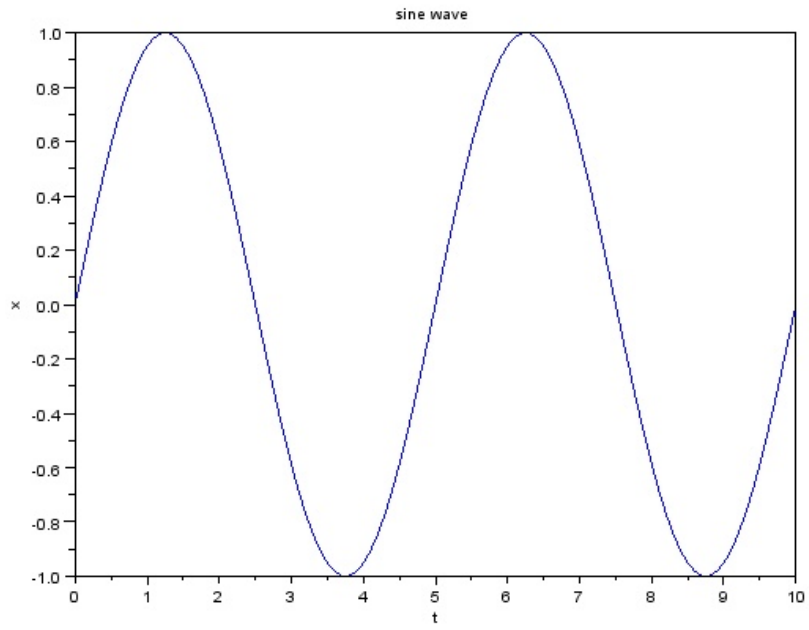


Figure 1.1: sinewave

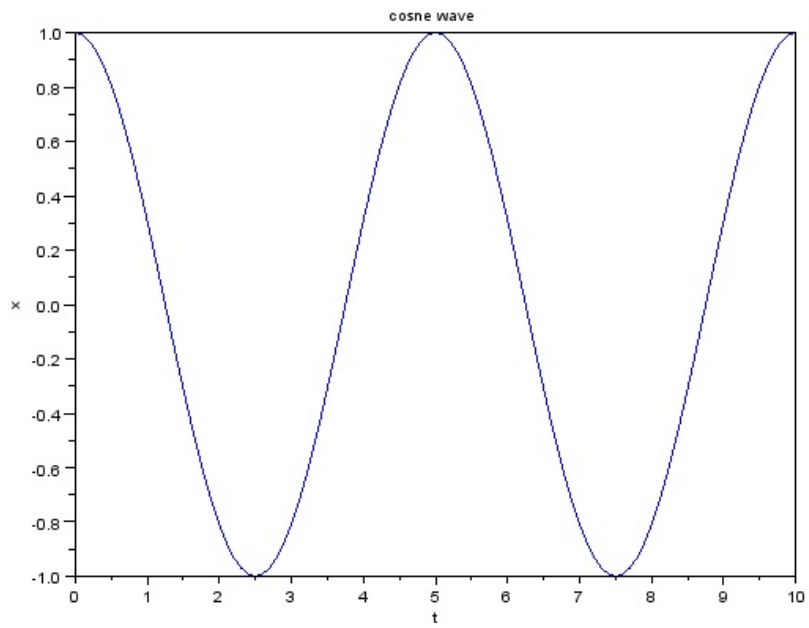


Figure 1.2: cosine wave

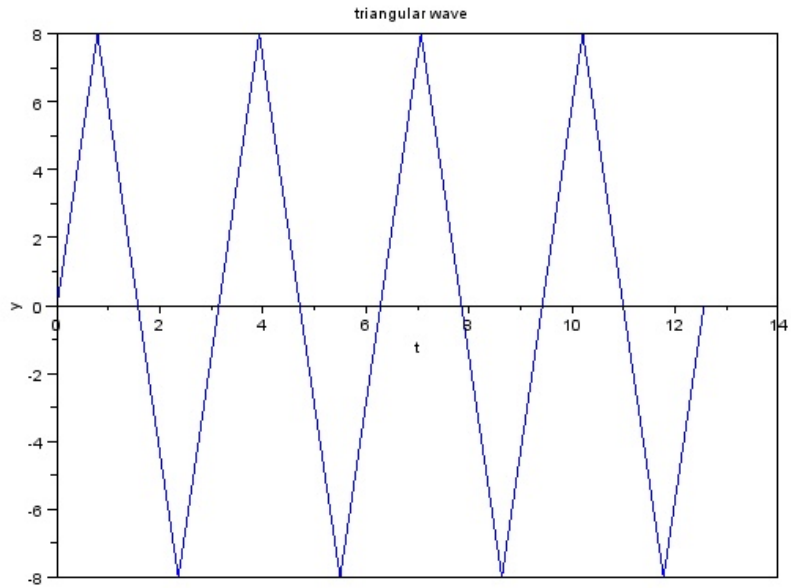


Figure 1.3: triangular wave

```

1  clc;
2  clf;
3  clear all;
4  //Caption:generation of cosine wave
5  f=0.2;
6  t=0:0.1:10;
7  x=cos(2*%pi*t*f);
8  plot(t,x);
9  title('cosne wave');
10 xlabel('t');
11 ylabel('x');

```

Scilab code Solution 1.3 triangular wave

```
1 clc;
2 clf;
3 clear all;
4 //Caption:generation of triangular wave
5 a=8;
6 t=0:(%pi/4):(4*%pi);
7 y=a*sin(2*t);
8 a=gca();
9 a.x_location="middle"
10 plot(t,y);
11 title('triangular wave');
12 xlabel('t');
13 ylabel('y');
```

Scilab code Solution 1.4 signum function

```
1 clc;
2 clf;
3 clear all;
4 //Caption:signum function
5 t =-5:0.1:5
6 a=gca();
7 a.x_location="middle"
8 x=sign(t);
9 b =gca();
10 b.y_location="middle"
11 plot(t,x);
12 title('signum function');
```

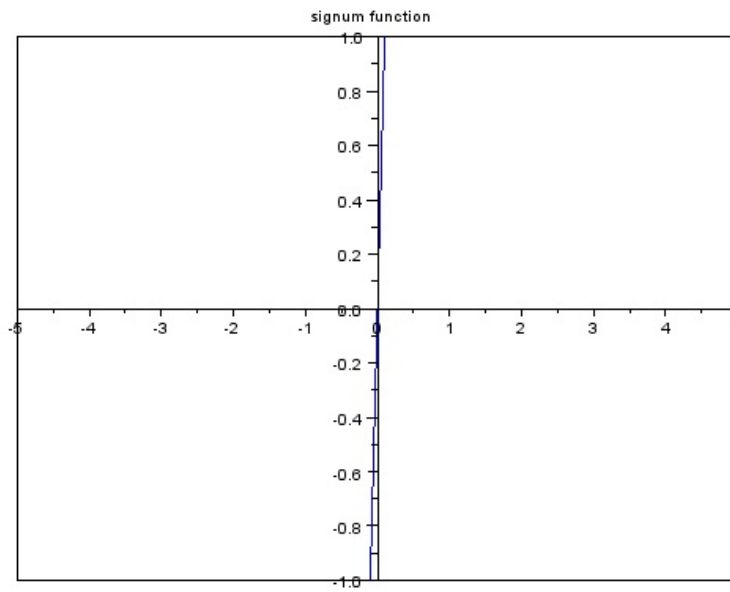


Figure 1.4: signum function

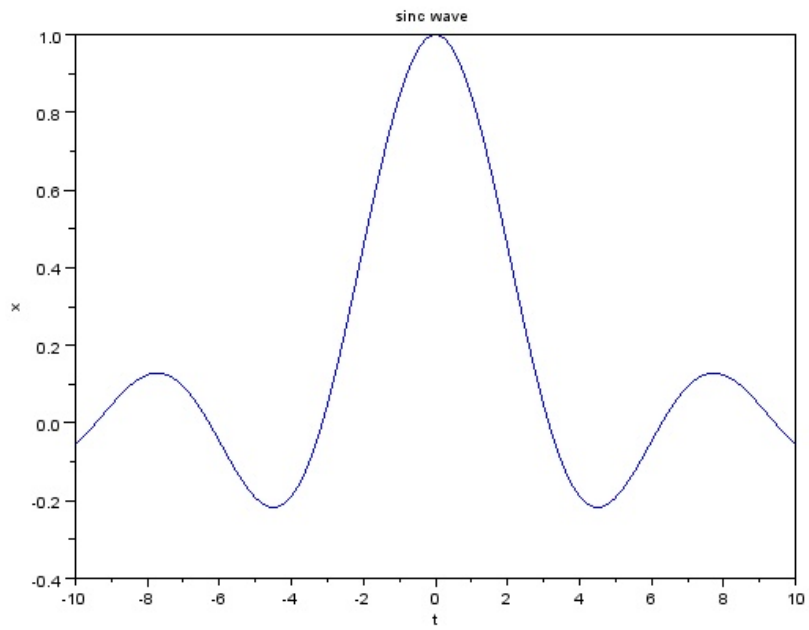


Figure 1.5: sinc function

Scilab code Solution 1.5 sinc function

```
1 clc;
2 clf;
3 clear all;
4 //Caption:sinc function
5 t=-10:0.1:10
6 x=sinc(t);
7 plot(t,x);
8 title('sinc wave');
9 xlabel('t');
10 ylabel('x');
```

Scilab code Solution 1.6 Exponential wave

```
1 clc;
2 clf;
3 clear all;
4 //Caption:generation of exponential wave
5 t=-2:0.1:2;
6 x=exp(t);
7 plot(t,x);
8 title('exponential wave');
9 xlabel('t');
10 ylabel('x');
```

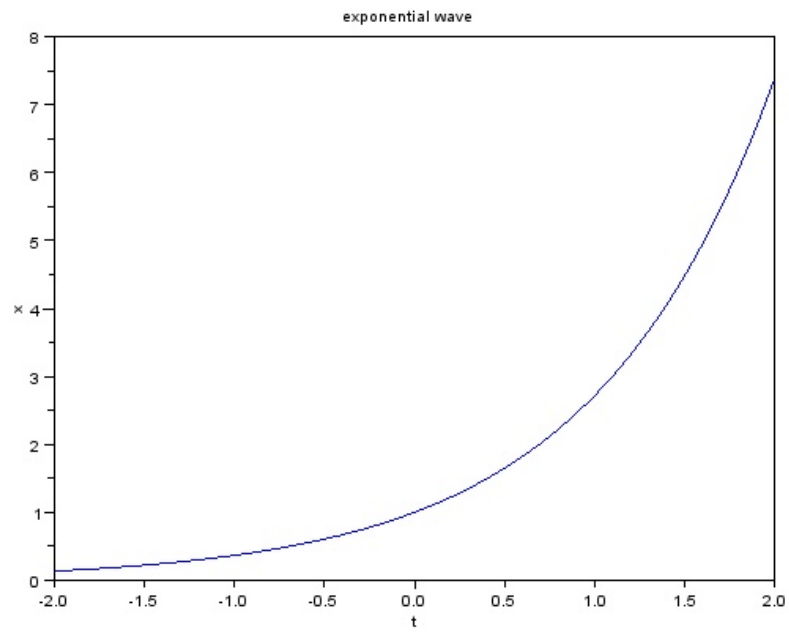


Figure 1.6: Exponential wave

Experiment: 2

GENERATION OF DISCRETE SIGNALS

Scilab code Solution 2.1 unit impulse signal

```
1  clc;
2  clf;
3  clear all;
4  //unit impulse
5  L=5;
6  n=-L:L;
7  x=[zeros(1,L),ones(1,1),zeros(1,L)];
8  a=gca();
9  a.y_location="middle"
10 plot2d3(n,x);
11 title('unit impulse');
```

Scilab code Solution 2.2 unitstepsignal

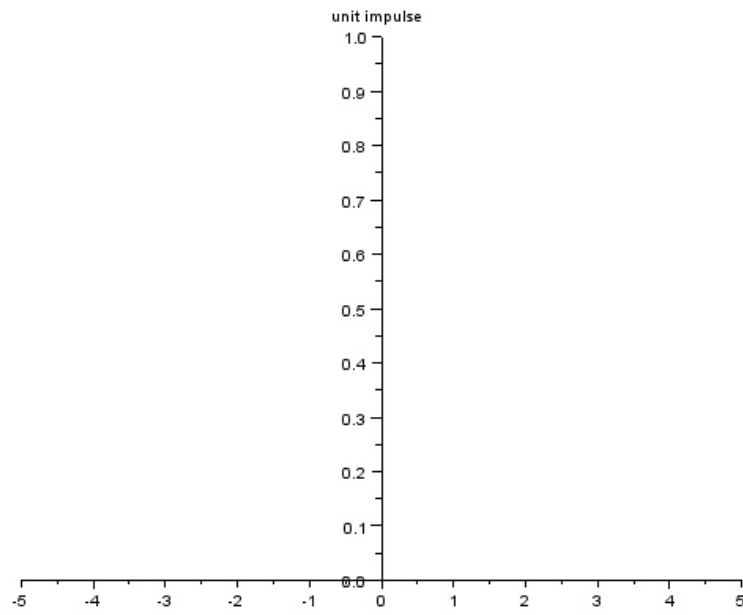


Figure 2.1: unit impulse signal

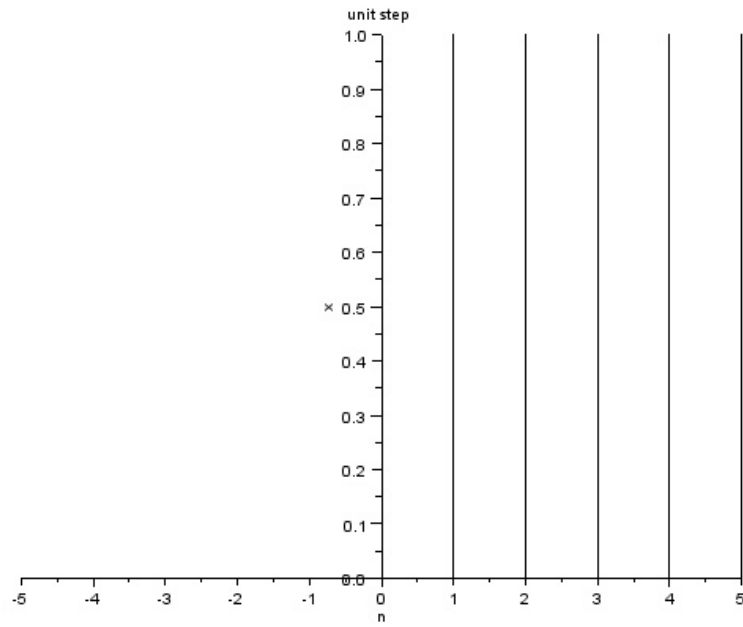


Figure 2.2: unitstepsignal

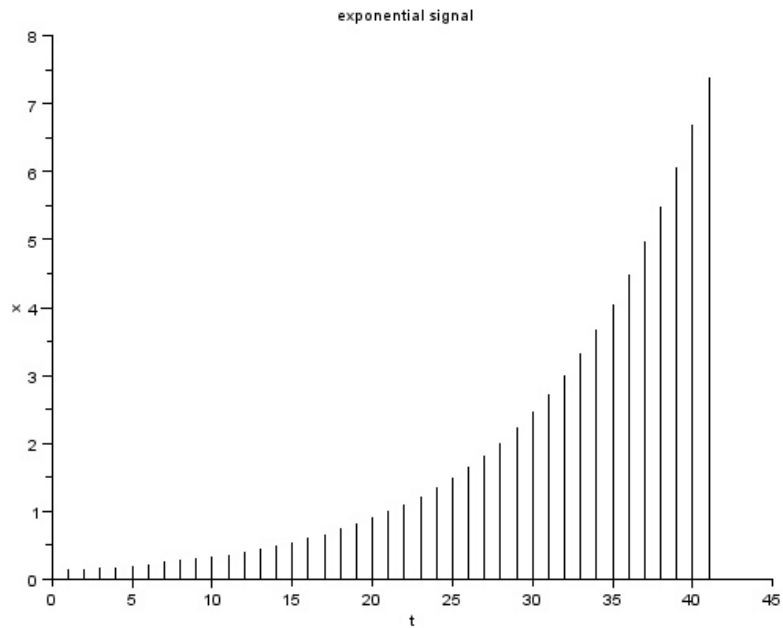


Figure 2.3: discreteexponentialwave

```

1  clc;
2  clf;
3  clear all;
4  L=5;
5  n=-L:L;
6  x=[zeros(1,L),ones(1,L+1)];
7  a=gca();
8  a.y_location="middle";
9  plot2d3(n,x);
10 title('unit step');
11 xlabel('n');
12 ylabel('x');

```

Scilab code Solution 2.3 discreteexponentialwave

```
1 //unit exponential
2 clc;
3 clf;
4 clear all;
5 a=1;
6 x=exp(a*t);
7 plot2d3(x);
8 title('exponential signal');
9 xlabel('t');
10 ylabel('x');
```

Scilab code Solution 2.4 unit ramp

```
1 //unit ramp
2 clc;
3 clf;
4 clear all;
5 L=5;
6 n=-L:L;
7 x=[zeros(1,L),0:L];
8 a =gca();
9 a.y_location='middle';
10 plot2d3(n,x);
11 xtitle('unit ramp signal');
12 xlabel('—>n');
13 ylabel('—>x(n)');
```

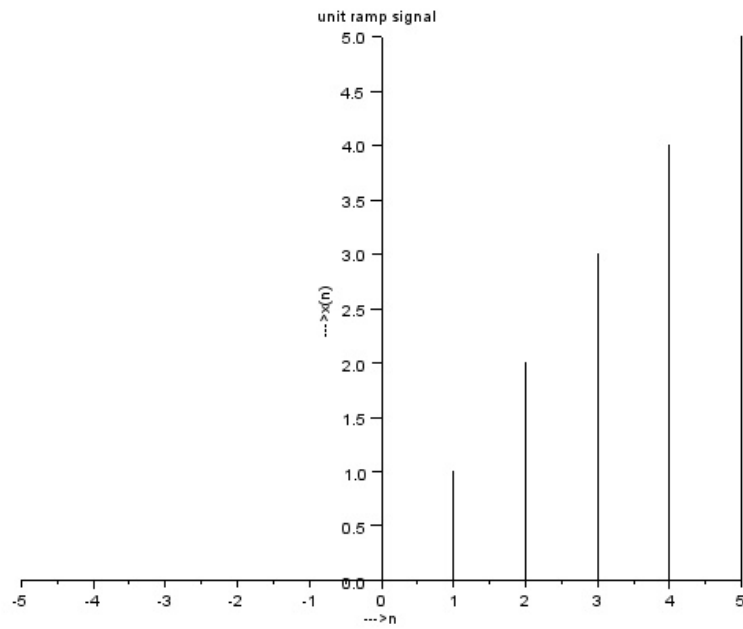


Figure 2.4: unit ramp

Experiment: 3

GENERATION OF SINUSOIDAL SIGNALS

Scilab code Solution 3.1 Generation of sinusoidal signals

```
1  clc;
2  clear all;
3  tic;
4  t=0:.01:%pi;
5  //generation of sine signals
6  y1=sin(t);
7  y2=sin(3*t)/3;
8  y3=sin(5*t)/5;
9  y4=sin(7*t)/7;
10 y5=sin(9*t)/9;
11 y = sin(t) + sin(3*t)/3 + sin(5*t)/5 + sin(7*t)/7 +
    sin(9*t)/9;
12 plot(t,y,t,y1,t,y2,t,y3,t,y4,t,y5);
13 legend('y','y1','y2','y3','y4','y5');
14 title('generation of sum of sinusoidal signals');
15 xgrid(1);
16 ylabel('—> Amplitude');
```

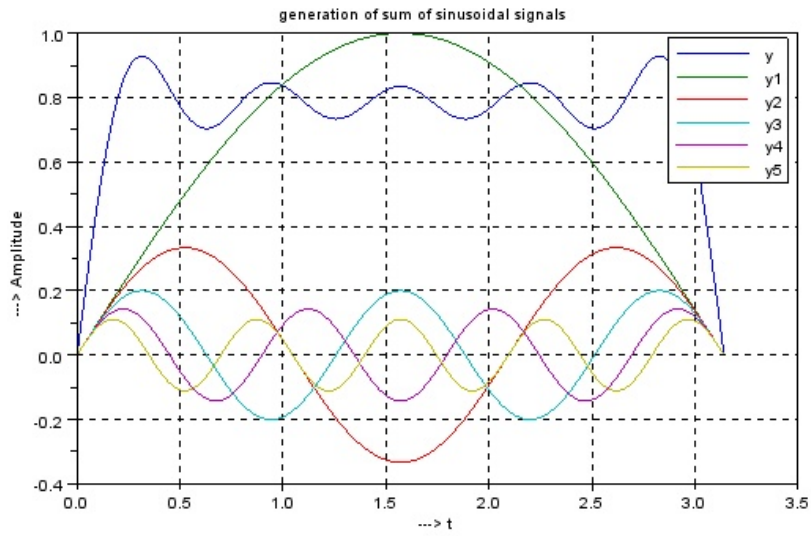


Figure 3.1: Generation of sinusoidal signals

```
17 xlabel('—> t');  
18 toc;
```

Experiment: 4

GENERATION OF COMPLEX EXPONENTIAL SIGNALS

Scilab code Solution 4.1 generation of complex exponential signals

```
1 //program for generation of complex exponential
  signals
2 clc;
3 clf;
4 clear all;
5 n=-10:0.1:10;
6 a=0.8;
7 b=-0.8;
8 c=1.25;
9 d=-1.25;
10 x1=a^n;
11 subplot(2,2,1);
12 plot2d3(n,x1);
13 xlabel('n');
14 ylabel('amplitude');
```

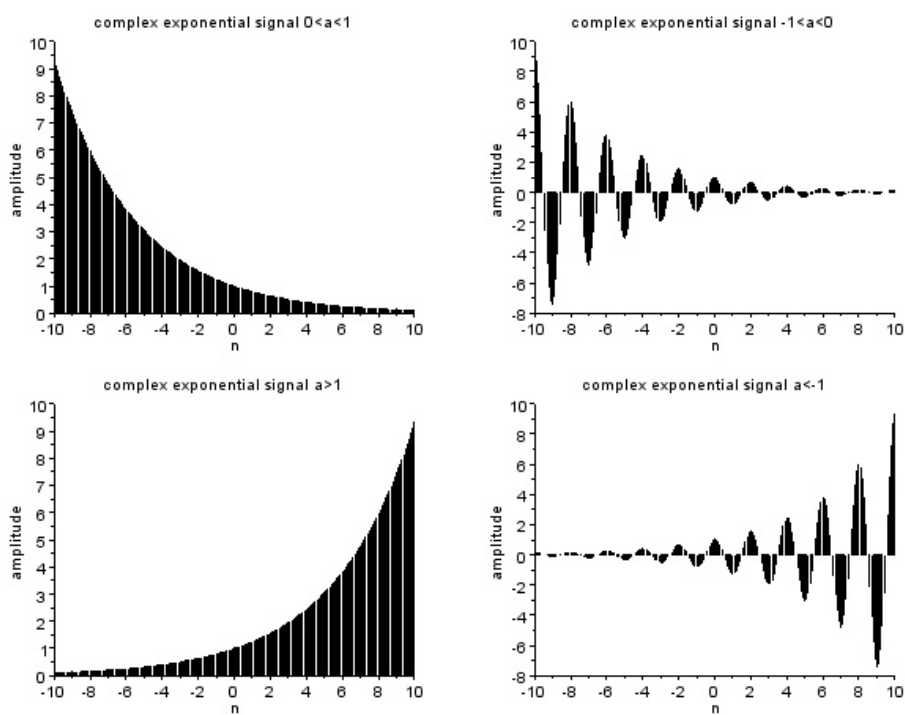


Figure 4.1: generation of complex exponential signals

```
15 title('complex exponential signal  $0 < a < 1$ ');
16 x2=b^n;
17 subplot(2,2,2);
18 plot2d3(n,x2);
19 xlabel('n');
20 ylabel('amplitude');
21 title('complex exponential signal  $-1 < a < 0$ ');
22 x3=c^n;
23 subplot(2,2,3);
24 plot2d3(n,x3);
25 xlabel('n');
26 ylabel('amplitude');
27 title('complex exponential signal  $a > 1$ ');
28 x4=d^n;
29 subplot(2,2,4);
30 plot2d3(n,x4);
31 xlabel('n');
32 ylabel('amplitude');
33 title('complex exponential signal  $a < -1$ ');
```

Experiment: 5

EXPONENTIALLY GROWING & DECAYING SIGNAL

Scilab code Solution 5.1 Exponentially Growing signals

```
1 //Exponentially decaying signal
2 clc;
3 clf;
4 clear all;
5 disp('Exponentially Decaying signal');
6 N=2;
7 a= 0.1;
8 n=0:0.1:N;
9 x=a.^-n;
10 disp('Exponentially growing signal');
11 disp(x);
12 plot2d3(n,x);
13 xlabel('Time');
14 ylabel('Amplitude');
15 title('Exponentially growing Signal Response');
```

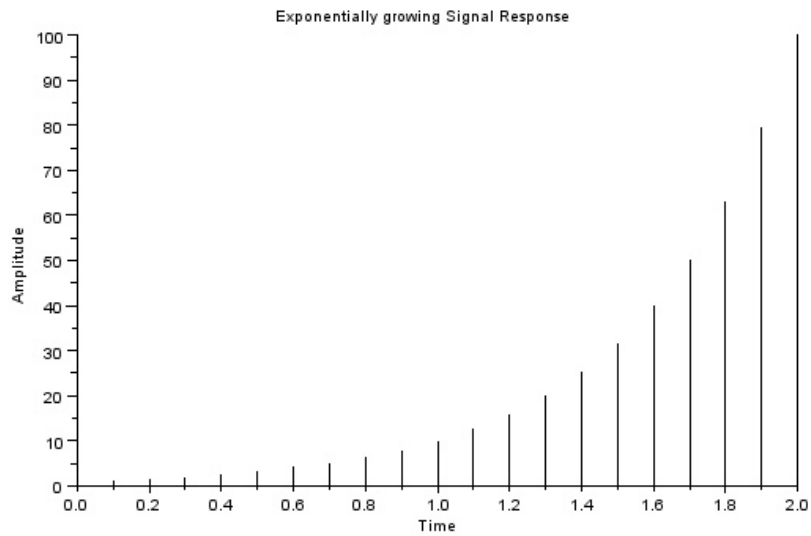


Figure 5.1: Exponentially Growing signals

Scilab code Solution 5.2 Exponentially decaying signals

```

1
2 clc;
3 clf;
4 clear all;
5 disp('Exponentially Decaying signal');
6 N=5;
7 a= 0.1;
8 n=0:0.1:N;
9 x=a.^n;
10 disp('Exponentially decaying signal');
11 disp(x);

```

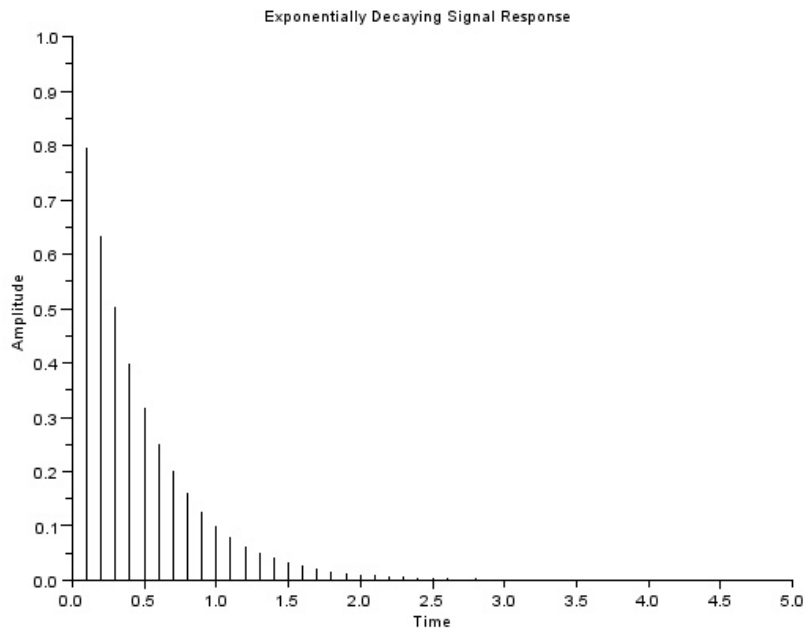


Figure 5.2: Exponentially decaying signals

```
12 plot2d3(n,x);
13 xlabel('Time');
14 ylabel('Amplitude');
15 title('Exponentially Decaying Signal Response');
```

Experiment: 6

ADDITION OF TWO CONTINUOUS SIGNALS

Scilab code Solution 6.1 Addition of two continuous signals

```
1 //program for addition of two continuous signals
2 clc;
3 clf;
4 clear all;
5 t=0:0.1:30
6 x1=sin(2*%pi*t/9);
7 x2=sin(2*%pi*t/2);
8 x3=x1+x2;
9 subplot(1,3,1);
10 plot(t,x1);
11 title('sinewave1');
12 xlabel('t');
13 ylabel('x1(t)');
14 subplot(1,3,2);
15 plot(t,x2);
16 title('sinewave2');
17 xlabel('t');
```

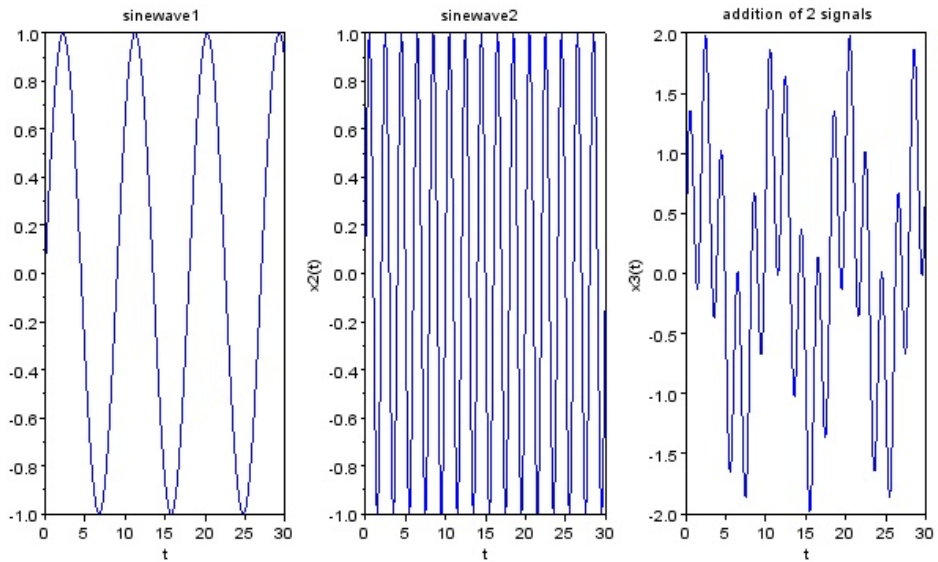


Figure 6.1: Addition of two continuous signals

```
18 ylabel('x2(t)');  
19 subplot(1,3,3);  
20 plot(t,x3);  
21 title('addition of 2 signals');  
22 xlabel('t');  
23 ylabel('x3(t)');
```

Experiment: 7

ADDITION OF TWO DISCRETE SIGNALS

Scilab code Solution 7.1 Addition of two discrete signals

```
1 //program for addition of two discrete signals
2 N=5;
3 n=0:0.1:N-1;
4 x1=sin(1*%pi*n);
5 x2=sin(2*%pi*n);
6 x3=x1+x2;
7 figure(1);
8 subplot(1,3,1);
9 plot2d3(n,x1);
10 title('sine wave1')
11 xlabel('n');
12 ylabel('x1(n)');
13 subplot(1,3,2)
14 plot2d3(n,x2);
15 title('sinewave2')
16 xlabel('n');
17 ylabel('x2(n)');
```

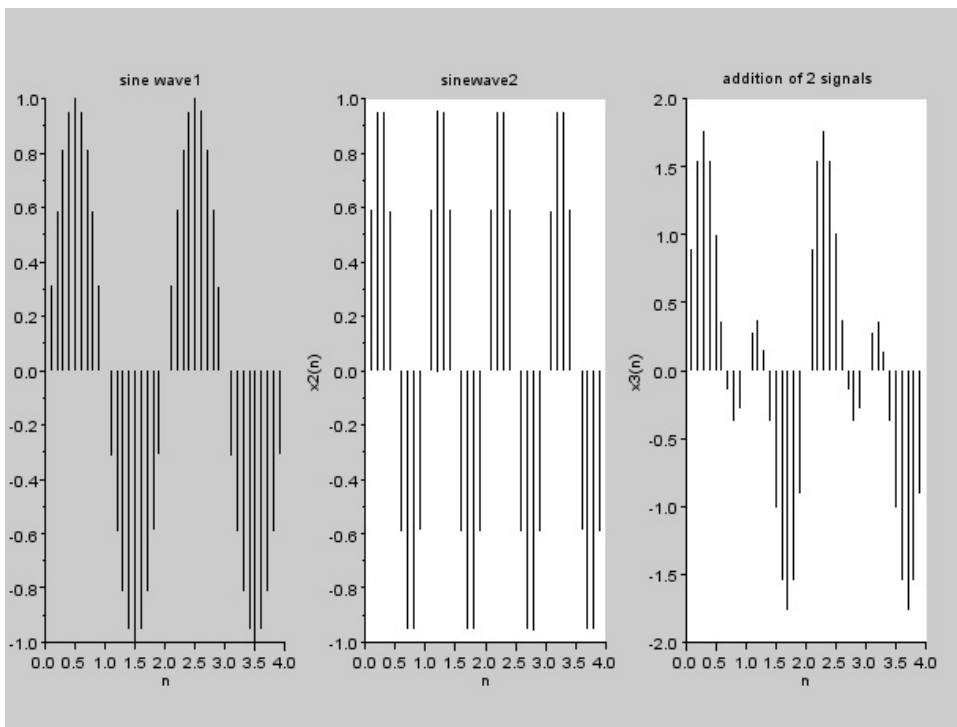


Figure 7.1: Addition of two discrete signals

```
18 subplot(1,3,3);
19 plot2d3(n,x3);
20 title('addition of 2 signals')
21 xlabel('n');
22 ylabel('x3(n)');
```

Experiment: 8

PROGRAM FOR SAMPLING PROCESS

Scilab code Solution 8.1 sampling

```
1 //program for sampling
2 clc;
3 clf;
4 clear all;
5 t=0:0.01:100;
6 fm=0.02;
7 x=cos(2*%pi*fm*t);
8 subplot(2,2,1);
9 plot(t,x);
10 title('continious time signal');
11 fs1=0.002;
12 n=0:1:50;
13 x1=cos(2*%pi*fm*n/fs1);
14 subplot(2,2,2);
15 plot2d3(n,x1);
16 title('time signal fs1<2fm');
17 fs2=0.04;
```

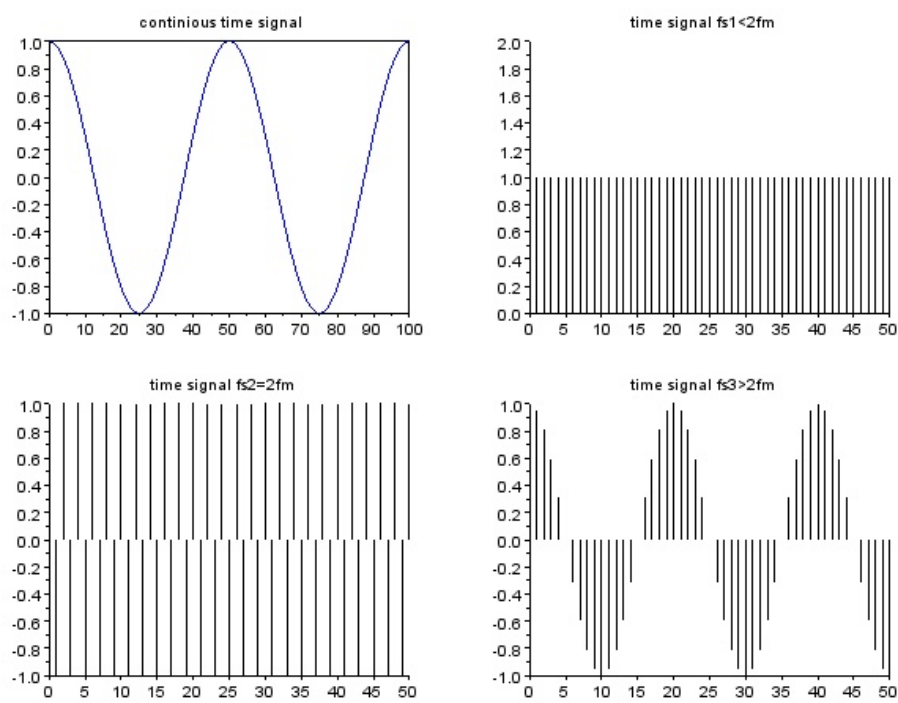


Figure 8.1: sampling

```
18 x2=cos(2*pi*fm*n/fs2);
19 subplot(2,2,3);
20 plot2d3(n,x2);
21 title('time signal fs2=2fm');
22 fs3=0.4;
23 x3=cos(2*pi*fm*n/fs3);
24 subplot(2,2,4);
25 plot2d3(n,x3);
26 title('time signal fs3>2fm');
```

Experiment: 9

PROGRAM FOR ALIASING PROCESS

Scilab code Solution 9.1 Aliasing process

```
1 //program for effect of aliasing
2 clc;
3 clf;
4 clear all;
5 fs=8000;
6 t=0:1/fs:0.01;
7 f=[1000,2000,3000,3500,4000,4500,8000,8500,9000];
8 i=1;
9 while i<7
10     y=sin(2*%pi*f(i)*t);
11     subplot(3,2,i);
12     plot(t,y);
13     xlabel('frequency');
14     ylabel('amplitude');
15     i=i+1;
16 end
```

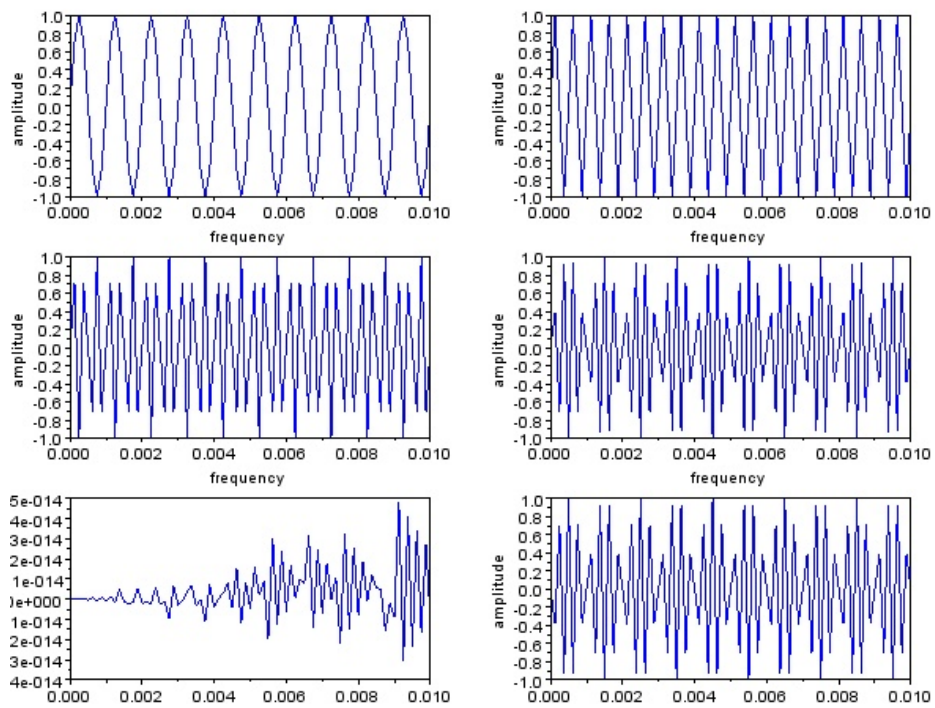


Figure 9.1: Aliasing process

Experiment: 10

LINEAR CONVOLUTION OF TWO SEQUENCES

Scilab code Solution 10.1 linear convolution of two sequences

```
1 //program for linear convolution
2 clc;
3 clf;
4 clear all;
5 x=input('Enter the first sequence:');
6 y=input('Enter the second Sequence:');
7 n=convol(x,y);
8 subplot(2,2,1);
9 plot2d3(x);
10 title('first sequence');
11 xlabel('n————>');
12 ylabel('amp————>');
13 subplot(2,2,2);
14 plot2d3(y);
15 title('second sequence');
16 xlabel('n————>');
17 ylabel('amp————>');
18 subplot(2,2,3);
19 plot2d3(n);
```

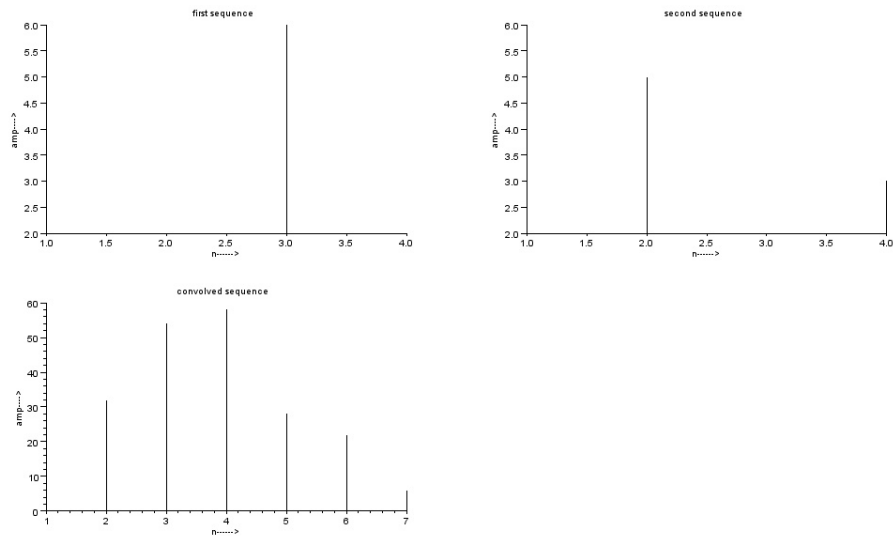


Figure 10.1: linear convolution of two sequences

```

20 title('convolved sequence');
21 xlabel('n————>');
22 ylabel('amp————>');
23 disp('The convolved sequence is');
24 disp(n);
25
26 //result:
27 //Enter the first sequence:[4 2 6 2]
28 //Enter the second Sequence:[6 5 2 3]
29 //
30 // The convolved sequence is
31 //
32 //      24.      32.      54.      58.      28.      22.      6.

```

Experiment: 11

CIRCULAR CONVOLUTION OF TWO SEQUENCES

Scilab code Solution 11.1 circular convolution

```
1 //program for circular convolution
2 clc;
3 clf;
4 clear all;
5 g=input('Enter the first sequence:');
6 h=input('Enter the second sequence:');
7 N1=length(g);
8 N2=length(h);
9 N=max(N1,N2);
10 N3=N1-N2;
11 if(N3>=0) then
12     h=[h,zeros(1,N3)];
13 else
14     g=[g,zeros(1,-N3)];
15 end
16 for n=1:N
17     y(n)=0;
```

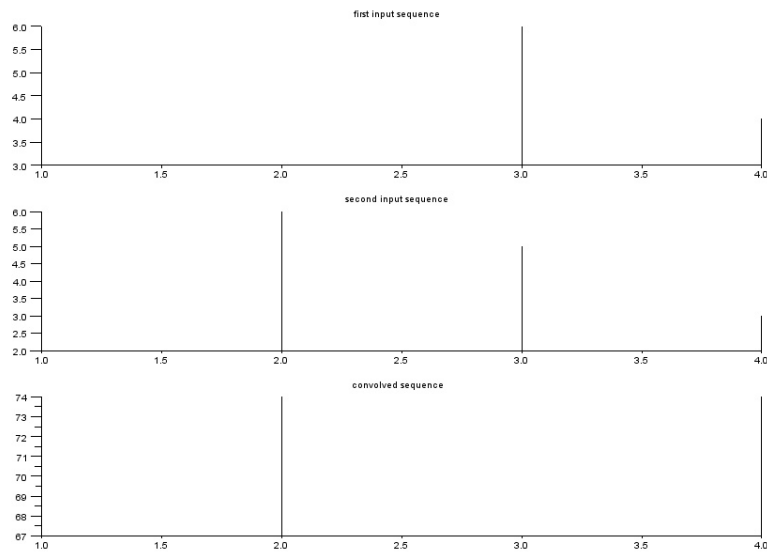


Figure 11.1: circular convolution

```

18 for i=1:N
19     j=n-i+1;
20     if(j<=0)
21         j=N+j;
22 end
23     y(n)=y(n)+g(i)*h(j);
24 end
25 end
26 disp('The resultant signal is:');
27 disp(y);
28 subplot(3,1,1);
29 plot2d3(g);
30 title('first input sequence');
31 subplot(3,1,2);
32 plot2d3(h);
33 title('second input sequence');
34 subplot(3,1,3);
35 plot2d3(y);
36 title('convolved sequence');
37

```

```
38
39
40 //result
41 //Enter the first sequence:[5 3 6 4]
42 //Enter the second sequence:[2 6 5 3]
43 //
44 // The resultant signal is:
45 //
46 //      73.      74.      67.      74.
```

Experiment: 12

DFT OF A SIGNAL

Scilab code Solution 12.1 DFT

```
1 //program for calculation of DFT of a signal
2 clc;
3 clf;
4 clear all;
5 N=input('Enter the value of N:');
6 x=input('enter input sequence');
7 for k=1:N
8     y(k)=0;
9     for n=1:N
10        y(k)=y(k)+x(n).*exp(-%i*2*%pi*(k-1)*(n-1)/N)
11        ;
12        A=real(y);
13        B=imag(y);
14    end;
15 end;
16 mag=abs(y);
17 x1=atan(imag(y),real(y));
18 phase=x1*(180/%pi);
19 disp('the resultant DFT sequence is');
```

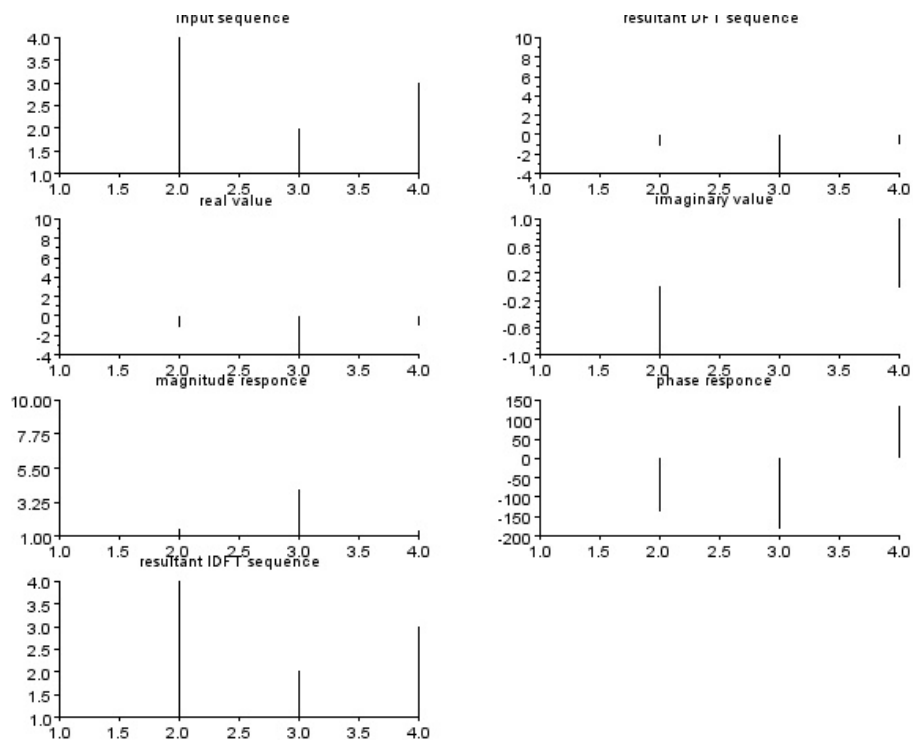


Figure 12.1: DFT

```

19 disp(y);
20 disp('the resultant real value is');
21 disp(A);
22 disp('the resultant imaginary value is');
23 disp(B);
24 disp('the magnitude response is');
25 disp(mag);
26 disp('the phase response is');
27 disp(phase);
28 for n=1:N
29     y(n)=0;
30     for k=1:N
31         y(n)=y(n)+(1/N)*(y(k).*exp(%i*2*%pi*(k-1)*(n
32             -1)/N));
33         C=real(x);
34     end;
35 end;
36 disp('the resultant IDFT sequence is');
37 disp(C);
38 subplot(4,2,1);
39 plot2d3(x);
40 title('input sequence');
41 subplot(4,2,2);
42 plot2d3(A);
43 title('resultant DFT sequence');
44 subplot(4,2,3);
45 plot2d3(A);
46 title('real value');
47 subplot(4,2,4);
48 plot2d3(B);
49 title('imaginary value');
50 subplot(4,2,5);
51 plot2d3(mag);
52 title('magnitude response');
53 subplot(4,2,6);
54 plot2d3(phase);
55 title('phase response');
56 subplot(4,2,7);

```

```

56 plot2d3(C);
57 title('resultant IDFT sequence');
58
59
60 //result
61 //Enter the value of N:4
62 //enter input sequence[1 4 2 3]
63
64 // the resultant DFT sequence is
65
66 //      10.  - 1. - i      - 4. - 1.102D-15i  - 1. + i
67
68 // the resultant real value is
69 //      10.  - 1.  - 4.  - 1.
70
71 // the resultant imaginary value is
72
73 //      0.  - 1.  - 1.102D-15      1.
74
75 // the magnitude response is
76
77 //      10.      1.4142136      4.      1.4142136
78
79 // the phase response is
80
81 //      0.  - 135.  - 180.      135.
82
83 // the resultant IDFT sequence is
84
85 //      1.      4.      2.      3.

```

Experiment: 13

FFT OF A SIGNAL

Scilab code Solution 13.1 fast fourier transform

```
1 //program for calculation of FFT of a signal
2 clc;
3 clf;
4 clear all;
5 N=input('Enter the value of N:');
6 x=input('enter input sequence ');
7 y=fft(x);
8 A=real(y);
9 B=imag(y);
10 mag=abs(y);
11 x1=atan(imag(y),real(y));
12 phase=x1*(180/%pi);
13 disp('the resultant FFT sequence is ');
14 disp(y);
15 disp('the magnitude response is ');
16 disp(mag);
17 disp('the phase response is ');
18 disp(phase);
19 z=ifft(y);
```

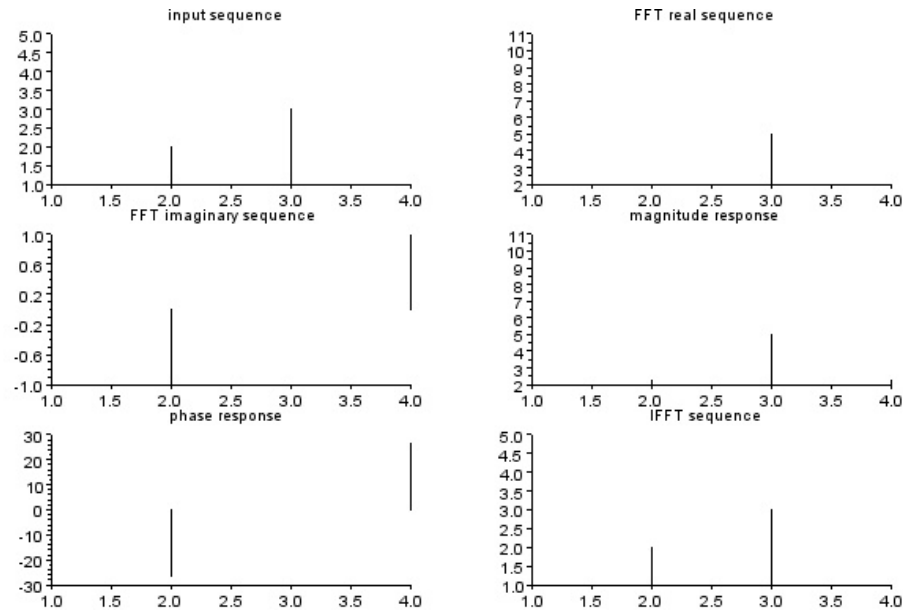


Figure 13.1: fast fourier transform

```

20 disp('the resultant IFFT sequence is ');
21 disp(z);
22 subplot(3,2,1);
23 plot2d3(x);
24 title('input sequence');
25 subplot(3,2,2);
26 plot2d3(A);
27 title('FFT real sequence');
28 subplot(3,2,3);
29 plot2d3(B);
30 title('FFT imaginary sequence');
31 subplot(3,2,4);
32 plot2d3(mag);
33 title('magnitude response');
34 subplot(3,2,5);
35 plot2d3(phase);
36 title('phase response');
37 subplot(3,2,6);
38 plot2d3(x);

```

```
39 title('IFFT sequence');
40
41
42 //result
43 //Enter the value of N:4
44 //enter input sequence[5 2 3 1]
45
46 //the resultant FFT sequence is
47
48 //      11.      2. - i      5.      2. + i
49
50 //the magnitude response is
51
52 //      11.      2.236068      5.      2.236068
53
54 //the phase response is
55
56 //0. - 26.565051      0.      26.565051
57
58 //the resultant IFFT sequence is
59
60 //      5.      2.      3.      1.
```
