Scilab Manual for
Satellite Communication
by Dr Lochan Jolly
Electrical Engineering
Thakur College of Engineering & Technology[1]

Solutions provided by
Dr Lochan Jolly
Electrical Engineering
Mumbai university/ Thakur college of engg and tech

November 28, 2026

[1]Funded by a grant from the National Mission on Education through ICT, http://spoken-tutorial.org/NMEICT-Intro. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website http://scilab.in

Contents

List of Scilab Solutions 3

1 To calculate coverage angle. 5

2 To calculate slant range . 7

3 To calculate propagation delay 9

4 To calculate Antenna Look Angels. 11

5 To calculate Limits of visibility. 14

6 To calculate Antenna Power and antenna gain for any given satellite communication antenna. 17

7 To calculate EIPR for any given satelite communication link. 19

8 To calculate (C/N) for Communication Satellite link considering various losses when input transmitted power is given. 21

9 To calculate (C/N) for Communication Satellite link considering various losses when saturation flux density is given. 24

10 To calculate total C/N after calculating (C/N)Downlink and (C/N)uplink. 27

11 To calculate total noise temperature for any given satelite communication link. 29

List of Experiments

Solution 1.1	Coverage angle	5
Solution 2.2	slant range	7
Solution 3.3	Propagation Delay	9
Solution 4.4	Look angels	11
Solution 5.5	Visibility Limit	14
Solution 6.6	Antenna	17
Solution 7.7	Link1	19
Solution 8.8	Link2	21
Solution 9.9	Link3	24
Solution 10.10	Total SNR	27
Solution 11.11	Noise Temperature	29

List of Figures

1.1 Coverage angle 6

2.1 slant range 8

3.1 Propagation Delay 10

4.1 Look angels 13

5.1 Visibility Limit 16
5.2 Visibility Limit 16

6.1 Antenna 18

7.1 Link1 20

8.1 Link2 23

9.1 Link3 26

10.1 Total SNR 28

11.1 Noise Temperature 31

Experiment: 1

To calculate coverage angle.

Scilab code Solution 1.1 Coverage angle

```
1 //find coverage angle for given elevation
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //rsh=42164;
6 //reh=6378;
7 //E=5;
8 clear;
9 close;
10 clc;
11 rsh=input("enter the height of satellite rsh");
12 reh=input("enter the radius of earth reh");
13 E=input("enter the value of angle of Elevation");
14
15 alpha=reh/rsh;
16 ca=2*asind(alpha*cosd(E));
17 disp ("degree", ca,"coverage angle=");
```

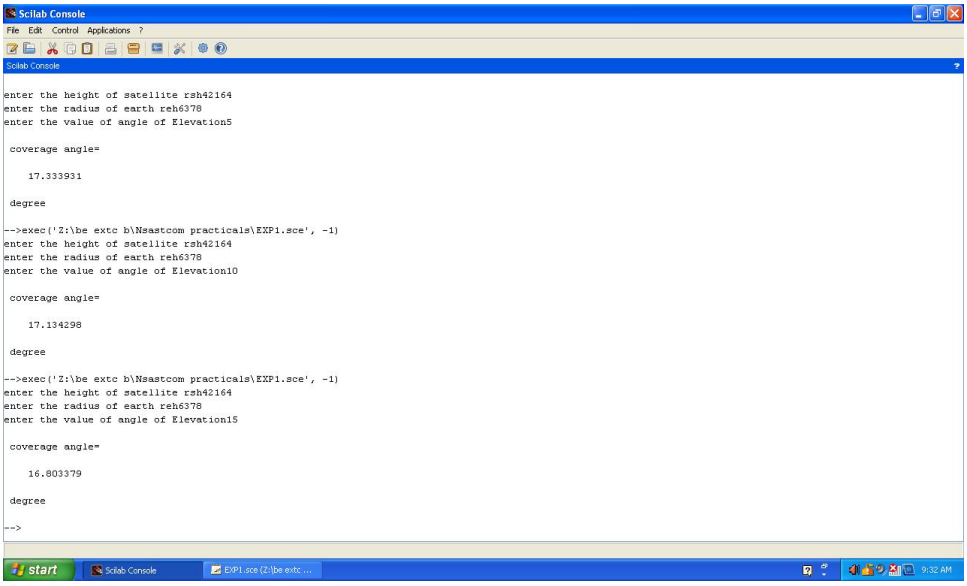

Figure 1.1: Coverage angle

Experiment: 2

To calculate slant range .

Scilab code Solution 2.2 slant range

```
1 //find  slant range  for given elevation
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //rsh=42164;
6 //reh=6378;
7 //E=5;
8 clear;
9 close;
10 //clc;
11 rsh=input("enter the height of satellite rsh");
12 reh=input("enter the radius of earth reh");
13 E=input("enter the value of angle of Elevation");
14 //rsh=42164;
15 //reh=6378;
16 //E=5;
17 v=3*10^8;
18 alpha=reh/rsh;
19 S=cosd(E+alpha)*reh/sind(alpha);
20 disp ("Km",S, "Slant Range=");
```

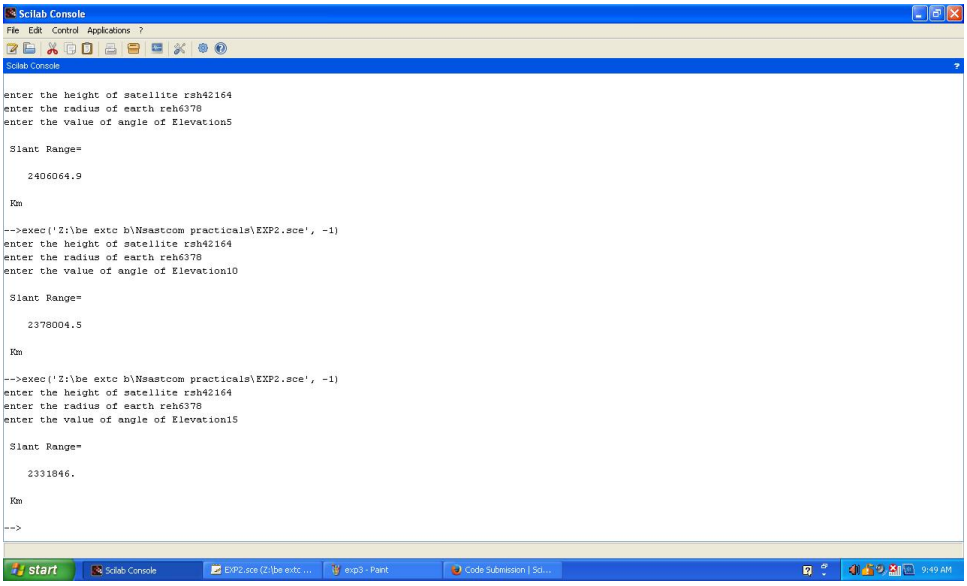

Figure 2.1: slant range

Experiment: 3

To calculate propagation delay

Scilab code Solution 3.3 Propagation Delay

```
1  //find  propagation delay for given elevation
2  //OS=Windows XP sp3
3  //Scilab version 5.4.0
4  //Sample Values
5  //rsh=42164;
6  //reh=6378;
7  //E=5;
8  clear;
9  close;
10 //clc;
11 rsh=input("enter the height of satellite rsh");
12 reh=input("enter the radius of earth reh");
13 E=input("enter the value of angle of Elevation");
14 //rsh=42164;
15 //reh=6378;
16 //E=5;
17 v=3*10^8;
18 alpha=reh/rsh;
19 S=cosd(E+alpha)*reh/sind(alpha);
20 P=2*S/v;
21 disp ("sec",P, "Propagation delay=");
```

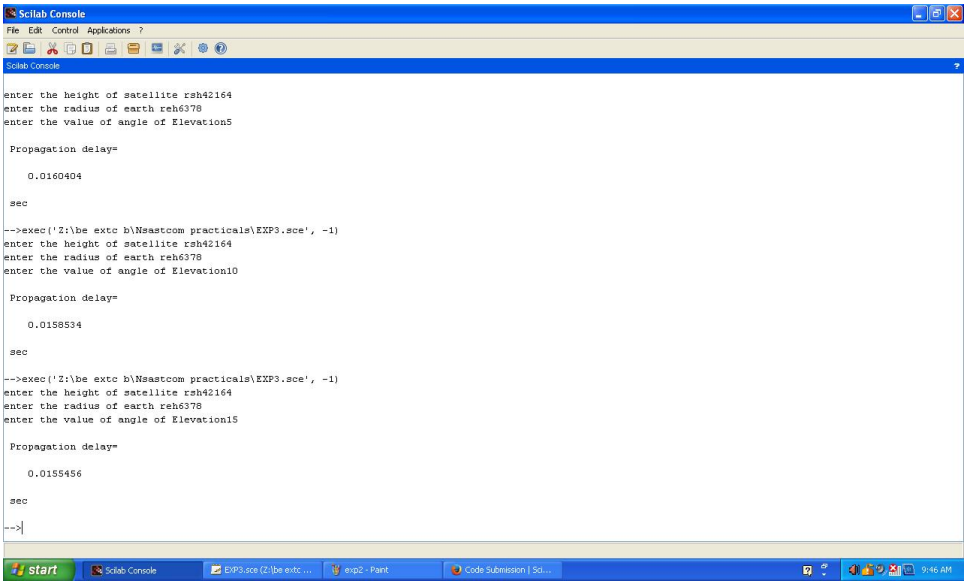

Figure 3.1: Propagation Delay

Experiment: 4

To calculate Antenna Look Angels.

Scilab code Solution 4.4 Look angels

```
1  //find Azimuth and elevation
2  //OS=Windows XP sp3
3  //Scilab version 5.4.0
4  //Sample Values
5  //La=39;
6  //dirae='N';
7  //Loe=77;
8  //diroe='W'
9  //Los=99;
10 //diros='W';
11 //re=6318;
12 //rs=42164;
13 clear;
14 close;
15 clc;
16 La=input("enter the value of Latitude of ES Lae");
17 dirae=input("enter the direction of Lattitude s (N/S
       )");
18 Loe=input("enter the value of Longitude of earth
```

```
    station Loe");
19 diroe=input("enter the direction of Longitude of ES
    (E/W)");
20 Los=input("enter the value of Longitude of satellite
     Los");
21 diros=input("enter the direction of Longitude of
    Satellite (E/W)");
22 re=input("enter the value of earth radius re");
23 rs=input("enter the height of satellite rs");
24 Adash=atand(tand(Los-Loe)/sind(La));
25 El=atand((rs-re*cosd(La)*cosd(abs(Los-Loe)))/(re*
    sind(acosd(cosd(La)*cosd(abs(Los-Loe))))))-acosd(
    cosd(La)*cosd(abs(Los-Loe)))
26
27 if dirae=='N' then
28     if diroe=='E' & diros=='E' then
29     if Loe>Los then A=180+Adash; else A=180-Adash;
          end; end;
30     if diroe=='E' & diros=='W' then A=180+Adash;end;
31     if diroe=='W' & diros=='E' then A=180-Adash; end
          ;
32     if diroe=='W' & diros=='W' then
33     if Loe>Los then A=180-Adash; else A=180+Adash;
34    end; end;
35 end;
36   if dirae=='S' then
37           if diroe=='E' & diros=='E' then
38      if Loe>Los then A=360-Adash; else A=Adash; end;
           end;
39     if diroe=='E' & diros=='W' then A=360-Adash; end
          ;
40     if diroe=='W' & diros=='E' then A=Adash; end;
41     if diroe=='W' & diros=='W' then
42     if Loe>Los then A=Adash; else A=360-Adash;
43    end;   end;
44 end;
45 disp ("degree", A, "Azimuth=");
46 disp ("degree", El, "Angle of elevation=");
```

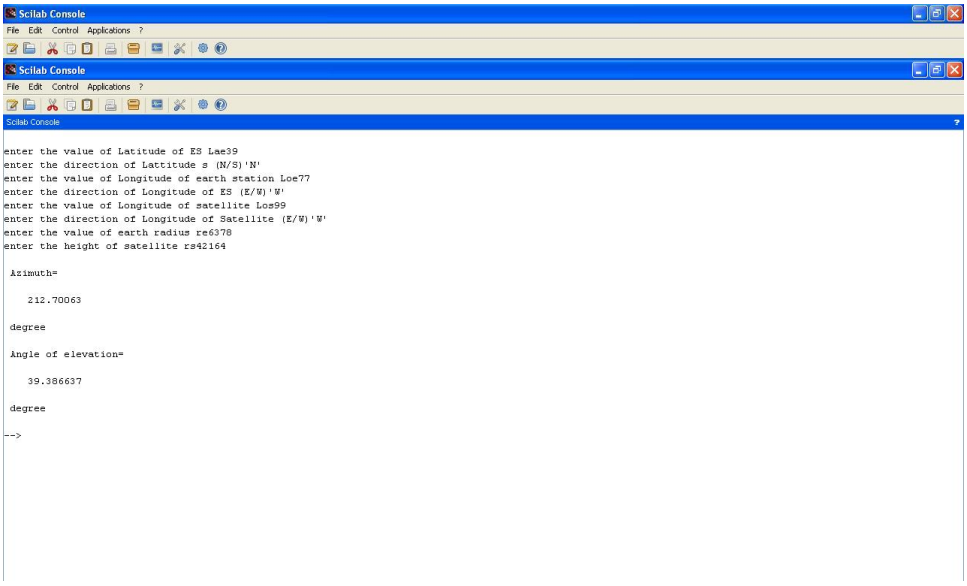

Figure 4.1: Look angels

Experiment: 5

To calculate Limits of visibility.

Scilab code Solution 5.5 Visibility Limit

```
1 //find limit of visibility of Earth station at
     certain lattitude and longitude and with certain
     elevation
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //rsh=42164;
6 //reh=6378;
7 //E=5;u can also keeo E=0,10
8 //La=48.429
9 //Lo=89.23
10 //dir='W'
11 clear;
12 close;
13 clc;
14 rsh=input("enter the height of satellite rsh");
15 reh=input("enter the radius of earth reh");
16 E=input("enter the value of angle of Elevation");
17 La=input("enter the value of Latitude La");
18 Lo=input("enter the value of Longitude Lo");
19 dir1=input("enter the direction of Longitude s (E/W)
```

```
    ");
x=reh*cosd(E)/rsh;
alpha=asind(x);
theta=90-E-alpha;
beta1=acosd(cosd(theta)/cosd(La));
LV1=Lo+beta1;//limit of visibility
LV2=Lo-beta1;//limit of visibility
if LV1>0 s1=dir1
elseif (dir1=='E') s1='W'
elseif (dir1=='W')  s1='E'
end
if LV2>0 s2=dir1
elseif (dir1=='E') s2='W'
elseif (dir1=='W')  s2='E'
end
disp ("degree", s1, abs(LV1),"Limit of visibilty 1=")
    );
disp ("degree", s2, abs(LV2),"Limit of visibilty 2=")
    );
```

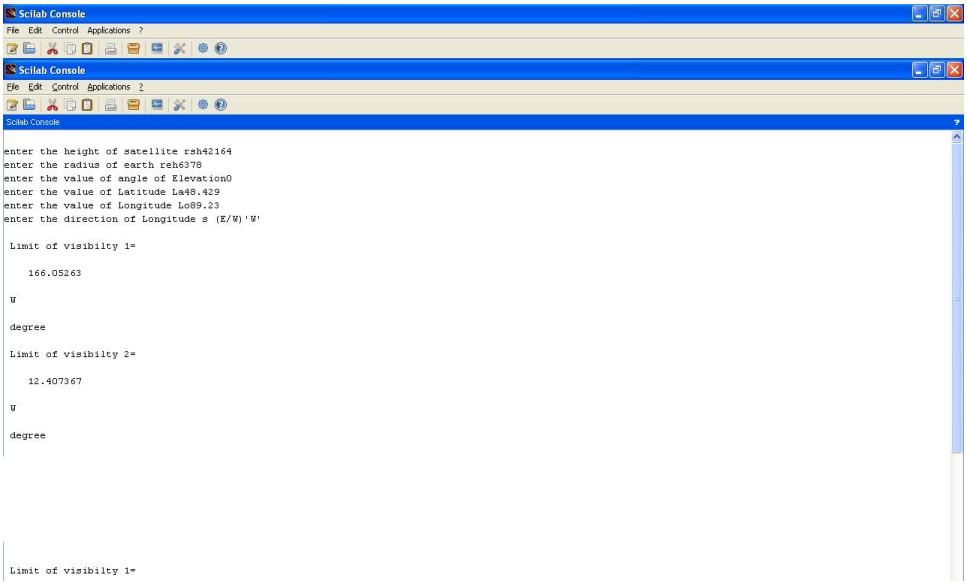

Figure 5.1: Visibility Limit

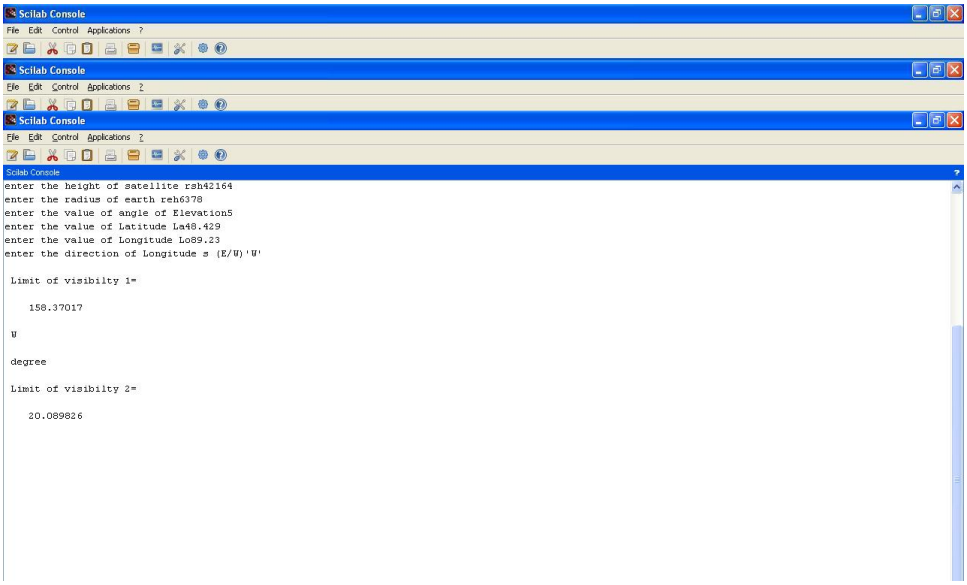

Figure 5.2: Visibility Limit

Experiment: 6

To calculate Antenna Power and antenna gain for any given satellite communication antenna.

Scilab code Solution 6.6 Antenna

```
1 //find the gain of an antenna
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //F=4
6 //Pt=100
7 //Dt=3
8 clear;
9 close;
10 clc;
11 F=input("enter the value of frequency in Ghz F")
12 c=3e8;
13 lambda= c/(F*1e9);
14 //find the gain of parabolic reflector at given
   frequency and daimeter
```



Figure 6.1: Antenna

```
15 eta=0.55;//efficiency
16 Pt=input("Power at the input of the antenna")
17 Dt=input("enter the value of daimeter of
      transmitting antenna=");
18 Gt=eta*(%pi*Dt/lambda)^2;
19 Gtdb=10*log(Gt);
20 po=Gt*Pt;
21 disp (Gtdb,"Antenna gain in dB=");
22 disp ('Watts',po,"Power output from the antenna=");
```

Experiment: 7

To calculate EIPR for any given satelite communication link.

Scilab code Solution 7.7 Link1

```
1  //Find EIRP
2  //OS=Windows XP sp3
3  //Scilab version 5.4.0
4  //Sample Values
5  //F=4
6  //Pt=100
7  //Dt=3
8  clear;
9  close;
10 clc;
11 F=input("enter the value of frequency in Ghz F")
12 c=3e8;
13 lambda= c/(F*1e9);
14 eta=0.55;//efficiency
15 Pt=input("Power at the input of the antenna")
16 Dt=input("enter the value of daimeter of
      transmitting antenna=");
17 Gt=eta*(%pi*Dt/lambda)^2;
18 Gtdb=10*log(Gt);
```



Figure 7.1: Link1

```
19 po=Gt*Pt;
20 EIRP=10*log(po);
21 disp (Gtdb,"Antenna gain in dB=");
22 disp ('dB',EIRP,"EIRP=");
```

Experiment: 8

To calculate (C/N) for Communication Satellite link considering various losses when input transmitted power is given.

Scilab code Solution 8.8 Link2

```
1 // To find the signal to noise ratio for satelite
     communication link for given input power
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //F=6.1
6 //Gtdb=54
7 //R=37500
8 //Losses=6
9 //Pt=100
10 //Grdb=26
11 //Ta=35
12 //Tr=500
```

```
13 //B=36
14 clear;
15 close;
16 clc;
17 F=input("enter the value of frequency in Ghz F");
18 c=3e8;
19 lambda= c/(F*1e9);
20 //find the gain of parabolic reflector at given
      frequency  and daimeter
21 Gtdb=input("enter the value of gain of transmitting
      antenna in dB=");
22 Gt=10^(Gtdb/10);
23 //calculate Free space Loss for given frequency and
      distance between earth and satellite log10
24 R=input("enter the value of distance between earth
      and satellite=");
25 FSL=(4*%pi*R*1e3/lambda);
26 FSLdb=20*log10(FSL);
27 losses=input("enter the value of additional losses
      in dB")
28 Totallosses=FSLdb+losses
29 TL=10^(Totallosses/10);
30 //determine received power
31 Pt=input("enter the value of power transmitted in W=
      ");
32 Grdb=input("enter the value receiver antenna gain in
       dB=");
33 Gr=10^(Grdb/10);;
34 Pr=Pt*Gt*Gr/TL;
35 Prdb=10*log10(Pr);
36 //Calculate noise power density and noise power
37 Ta=input("enter the value of antenna noise
      temperaturem in K=");
38 Tr=input("enter the value receiver noise temperature
       in K=");
39 B=input("enter the value receiver bandwidth MHz=");
40 En=Ta+Tr;//equivalent noise temperature
41 K=1.36e-23;//Boltzman constant
```

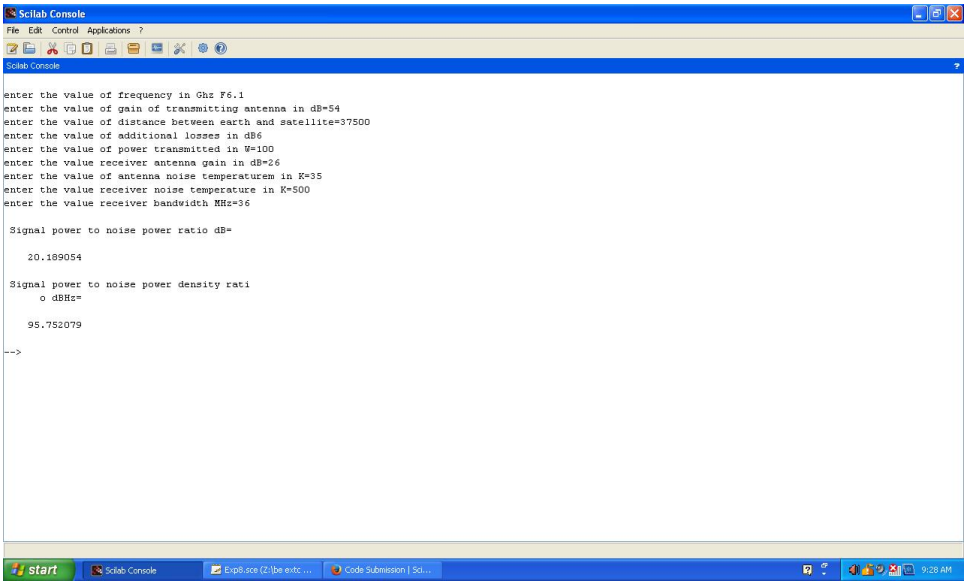

Figure 8.1: Link2

```
42 Pno=K*En*B*1e6;//noise power
43 Pnodb=10*log10(Pno);
44 Pnod=K*En;//noise power density
45 Pnoddb=10*log10(Pnod);
46 // signal to noise ratio
47 CN=Prdb-Pnodb;
48 CN0=Prdb-Pnoddb;
49 disp ('dB',CN,"Signal power to noise power ratio dB=
    ");
50 disp ('dBHz',CN0,"Signal power to noise power
    density ratio dBHz=");
```

Experiment: 9

To calculate (C/N) for Communication Satellite link considering various losses when saturation flux density is given.

Scilab code Solution 9.9 Link3

```
1 //upliknk frequency is given and flux density
    required to saturate the transponder is given
    calculate signal to noise ratio
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //F=14
6 //R=42164
7 //saidb=-91.4
8 //Bo=11
9 //Pt=100
10 //GT=-6.7
11 clear;
12 close;
13 clc;
```

```
14 F=input("enter the value of frequency in Ghz F");
15 c=3e8;
16 K=-228.6;//dB Boltzman constant
17 lambda= c/(F*1e9);
18 R=input("enter the value of distance between earth
     and satellite=");
19 FSL=(4*%pi*R*1e3/lambda);//free space losses
20 FSLdb=20*log10(FSL);
21 saidb=input("enter the value of saturation flux
     density of transponder in dB=");
22 A0db=-10*log10(4*%pi/(lambda^2));
23 EIRPdb=saidb+FSLdb+A0db;
24 //disp (EIRPdb,"earth station EIRP  required for
     saturation of transponder dB=");
25 Bo=input("enter the value of backoff=");
26 GT=input("enter the value of G/T in dB/K");
27 //B=input("enter the value of bandwidth in Hz");
28 //Bdb=10*log10(B);
29 CNUdb=EIRPdb+GT-Bo-K-FSLdb//-Bdb;
30 disp ('dB',CNUdb,"Sinal to noise density ratio
     uplink=");
```

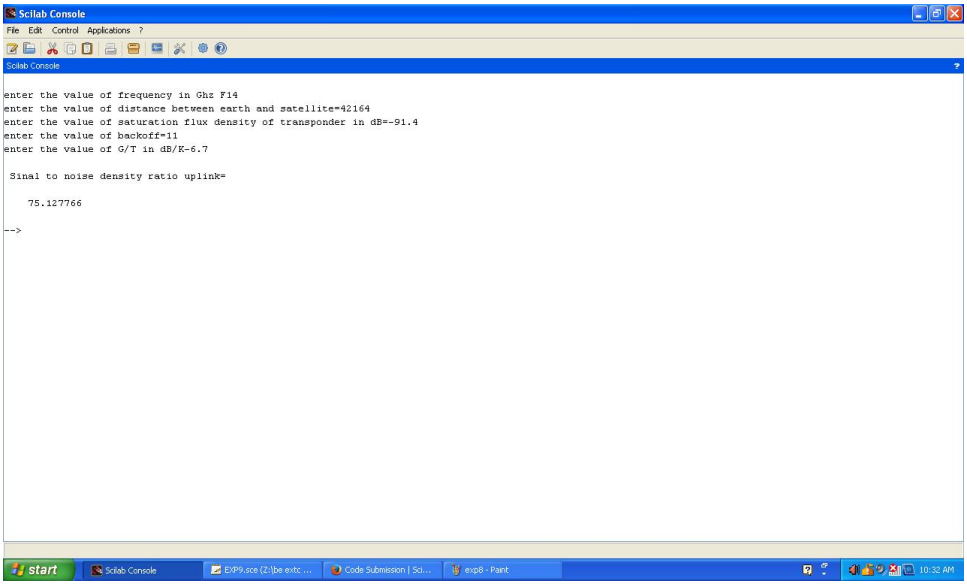

Figure 9.1: Link3

Experiment: 10

To calculate total C/N after calculating (C/N)Downlink and (C/N)uplink.

Scilab code Solution 10.10 Total SNR

```
1 //For given signal to noise ratio of uplink and down
      link  calculate total signal to noise ratio of
     satellite link
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //CNUdb=26
6 //CNDdb=24
7 clear;
8 close;
9 clc;
10 //for given data of downlink calculate CND and CNT
11 CNUdb=input("enter the value of uplink signal to
     noise density ratio in dB=");
12 CNDdb=input("enter the value ofdownlink signal to
     noise density ratio in dB=");
13 //CNIdb=input("enter the value of inteference signal
```

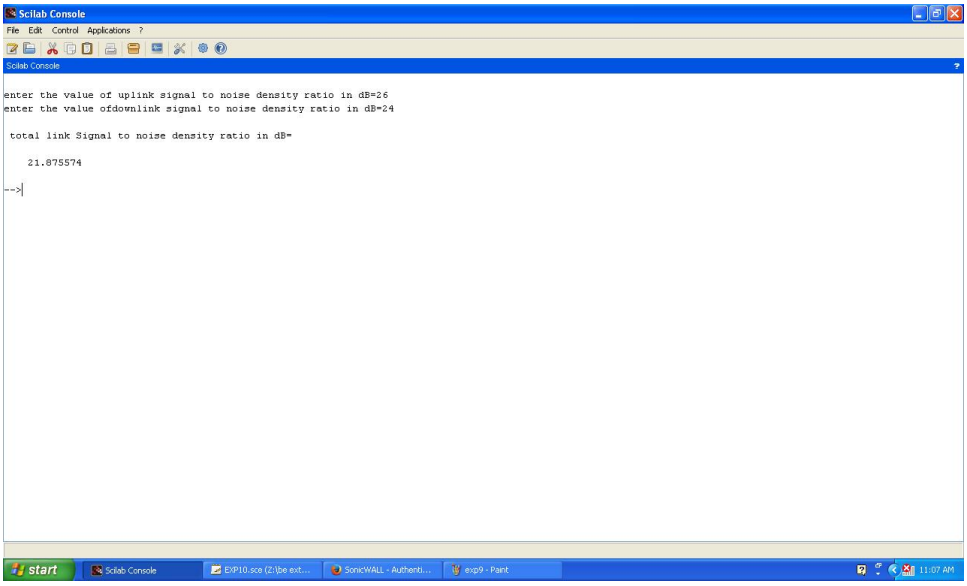

Figure 10.1: Total SNR

```
    to noise density ratio in dB=");
14 CND=10^(CNDdb/10);
15 CNU=10^(CNUdb/10);
16 //CNI=10^(CNIdb/10);
17 CNT=1/((1/CND)+(1/CNU)) // can add this term if
    interfernece is there (1/CNI));
18 CNTdb=10*log10(CNT);
19 disp (CNTdb,"total link Signal to noise density
    ratio in dB=");
```

Experiment: 11

To calculate total noise temperature for any given satelite communication link.

Scilab code Solution 11.11 Noise Temperature

```
1 //find equivalent noise temperature of N stage
    receiver here for lowest equivalent noise
    temperature we r assuming first stage is LNA and
    second stage is waverguide and subsequent stage
    are amplifiers for which noise figure and gain r
    specified
2 //OS=Windows XP sp3
3 //Scilab version 5.4.0
4 //Sample Values
5 //N=3
6 //Tant=35
7 //Te1=150
8 //G(1)=50
9 //L=5
10 //F(3)=12
11 //G(3)=5
12 clear;
```

```
close;
clc;
N=input("enter the No.of stages");
Tant=input("enter the antenna temperature");
Te1=input("enter the equivalent noise temperature of
    LNA");
G(1)=input("enter the gain of LNA in dB");
Ga(1)=10^(G(1)/10);
L=input("enter the attenuation of waveguide in dB");
La=10^(L/10);
To=290;
Te(2)=Tant+Te1+To*(L-1)/G(1)//gain till second stage
Ga(2)=Ga(1)/La;
for i=3:1:N//starting from 3rd stage to N stage
F(i)=input("enter the noise figure of next stage in
   dB");
Fa(i)=10^(F(i)/10)
G(i)=input("enter the gain of next stage amplifierin
    dB ");
Ga(i)=10^(G(i)/10)
Te(i)=Te(i-1)+To*(Fa(i)-1)/(Ga(i-1)*Ga(i));
end
X=Te(i);
disp('K',X,"Equivalent noise temperature");
```

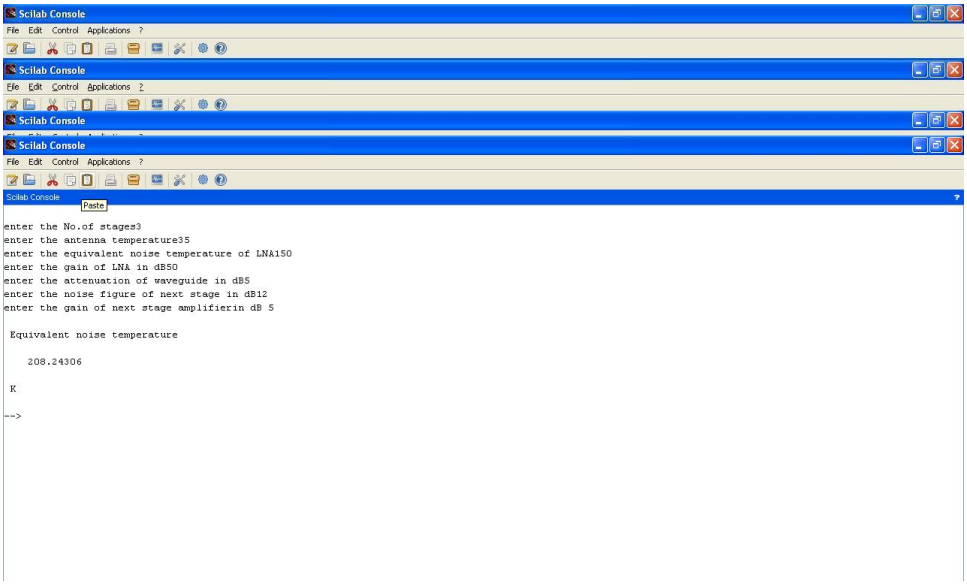

Figure 11.1: Noise Temperature