

Scilab Manual for
Systems and Signal Processing Lab
by Prof Kotha Manohar
Electronics and Telecommunication
Engineering
Matrusri Engineering College¹

Solutions provided by
Prof Kotha Manohar
Electronics and Telecommunication Engineering
Matrusri Engineering College

March 10, 2025

¹Funded by a grant from the National Mission on Education through ICT, <http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website <http://scilab.in>

Contents

List of Scilab Solutions	3
1 Introduction to SCILAB and signal generation.	5
2 Perform Fast Fourier Transform	11
3 Perform Linear convolution.	17
4 Perform Circular Convolutions.	20
5 Perform FIR filters design using different window functions.	24
6 Perform IIR filters design: Butterworth and Chebyshev.	29
7 Perform Interpolation and Decimation.	37
8 Perform Implementation of multi-rate systems.	44
9 Perform Time response of non-linear systems.	47
10 Design of P, PI, PD and PID controllers	49

List of Experiments

Solution 1.1	Basic Signals Generation	5
Solution 2.2	Inverse DFT	11
Solution 2.3	FFT	12
Solution 3.1	Linear Convolution	17
Solution 4.1	Circular Convolution	20
Solution 5.1	FIR Filter Design	24
Solution 6.1	Butterworth Filter	29
Solution 6.2	Type 1 Chebyshev Filter	31
Solution 6.3	Type 2 Chebyshev Filter	34
Solution 7.1	Interpolation	37
Solution 7.2	Decimation	40
Solution 8.1	Multirate Systems	44
Solution 9.1	Non Linear Systems	47
Solution 10.1	P Controller	49
Solution 10.2	PI Controller	52
Solution 10.3	PD Controller	53
Solution 10.4	PID Controller	56
AP 1	IDFT Function	59

List of Figures

1.1	Basic Signals Generation	9
1.2	Basic Signals Generation	10
1.3	Basic Signals Generation	10
2.1	Inverse DFT	13
2.2	FFT	16
3.1	Linear Convolution	19
4.1	Circular Convolution	23
5.1	FIR Filter Design	28
6.1	Butterworth Filter	31
6.2	Type 1 Chebyshev Filter	34
6.3	Type 2 Chebyshev Filter	36
7.1	Interpolation	40
7.2	Decimation	43
8.1	Multirate Systems	46
9.1	Non Linear Systems	48
10.1	P Controller	51
10.2	PI Controller	54
10.3	PD Controller	56
10.4	PID Controller	58

Experiment: 1

Introduction to SCILAB and signal generation.

Scilab code Solution 1.1 Basic Signals Generation

```
1 // Experiment Number : 1
2 //Write a program to generate continuous and
   discrete time impulse , step , rectangular , saw
   tooth and sinusoidal functions
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14 clc;
15 clear;
16 close;
```

```

17
18 // Continuous time Unit Impulse function generation
19 t=-4:0.1:4;
20 a=[zeros(1,40) 1 zeros(1,40)];
21 k=input("Enter the Amplitude of impulse function :")
    ); // reading amplitude value from keyboard
22 b=k*a;
23 subplot(2,2,1);
24 plot(t,b);
25 //Labeling the axes and title for the figure
26 xlabel('Time t');
27 ylabel('Amplitude');
28 title('Continuous time Impulse function');
29
30 // Discrete time Unit Impulse function generation
31 subplot(2,2,2);
32 plot2d3(t,b);
33 //Labeling the axes and title for the figure
34 xlabel('Time t');
35 ylabel('Amplitude');
36 title('Discrete time impulse function');
37
38 // Discrete time Unit step function generation
39 t=0:3;
40 y=ones(1,4);
41 subplot(2,2,3);
42 plot2d3(t,y);
43 //Labeling the axes and title for the figure
44 xlabel('Time t');
45 ylabel('Amplitude');
46 title('Discrete step function');
47
48 // Continuous time Unit step function generation
49 subplot(2,2,4);
50 plot(t,y);
51 //Labeling the axes and title for the figure
52 xlabel('Time t');
53 ylabel('Amplitude');

```

```

54 title('Continuous step function');
55
56 //Continuous time Square wave function generation
57
58 a=input("Enter the amplitude of square wave
        function :");
59 t =0:0.001:1;
60 d=a*squarewave(2* %pi *10* t);
61 figure;
62 subplot(2 ,2 ,1);
63 plot(t,d);
64 //Labeling the axes and title for the figure
65 xlabel('Time t');
66 ylabel('Amplitude');
67 title('Continuous time Square wave signal');
68
69 //Discrete time Square wave function generation
70 n=0:0.01:1;
71 d=a* squarewave (2*%pi*10*n);
72 subplot (2 ,2 ,2);
73 plot2d3 (n,d);
74 //Labeling the axes and title for the figure
75 xlabel('Time t');
76 ylabel('Amplitude');
77 title('Discrete time Square wave signal');
78
79 //Continuous time Sawtooth wave generation
80 Fs = 20; // samples per second
81 t_total = 10; // seconds
82 n_samples = Fs * t_total ;
83 t = linspace (0, t_total , n_samples );
84 f =500; // sound frequency
85 saw_wave =2*( f*t- floor (0.5+ f*t));
86 subplot(2 ,2 ,3);
87 plot(t,saw_wave );
88 //Labeling the axes and title for the figure
89 xlabel('Time t');
90 ylabel('Amplitude');

```



```

91 title('Continuous time Sawtooth wave');
92
93 //Discrete time Sawtooth wave generation
94 Fs = 20; // samples per second
95 t_total = 10; // seconds
96 n_samples = Fs * t_total ;
97 n = linspace (0, t_total , n_samples );
98 f =500; // sound frequency
99 saw_wave =2*(f*n- floor (0.5+ f*n));
100 subplot(2 ,2 ,4);
101 plot2d3(n, saw_wave );
102 //Labeling the axes and title for the figure
103 xlabel('Discrete time n');
104 ylabel('Amplitude');
105 title('Discrete time Sawtooth wave');
106
107 //Continuous time Sine wave generation
108 //a=input( Enter amplitude );
109 n=0:0.001:1;
110 d=a* sin(2*%pi*10*n);
111 figure;
112 subplot (2 ,1 ,1);
113 plot(n,d);
114 //Labeling the axes and title for the figure
115 xlabel('Time t');
116 ylabel('Amplitude');
117 title('Continuous time Sinusoidal signal');
118
119 //Discrete time Sine wave generation
120 n=0:0.009:1;
121 d=a* sin(2*%pi*10*n);
122 subplot (2 ,1 ,2);
123 plot2d3 (n,d);
124 //Labeling the axes and title for the figure
125 xlabel('Time t');
126 ylabel('Amplitude');
127 title('Discrete time sinusoidal signal');
128

```

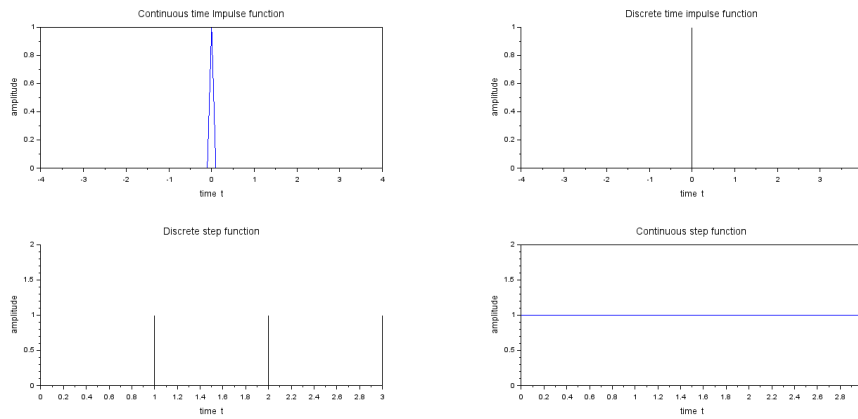


Figure 1.1: Basic Signals Generation

```

129
130 //Inputs in console window
131 //Enter the Amplitude of impulse function :1
132
133 //Enter the amplitude of square wave function :1

```

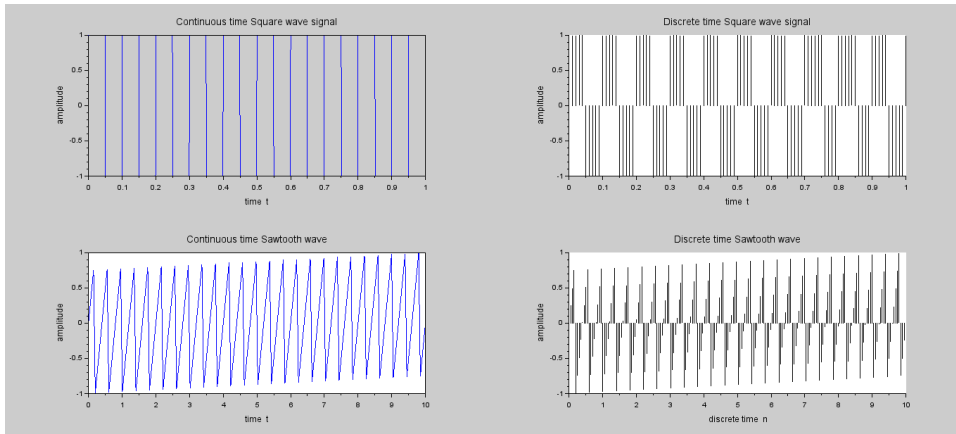


Figure 1.2: Basic Signals Generation

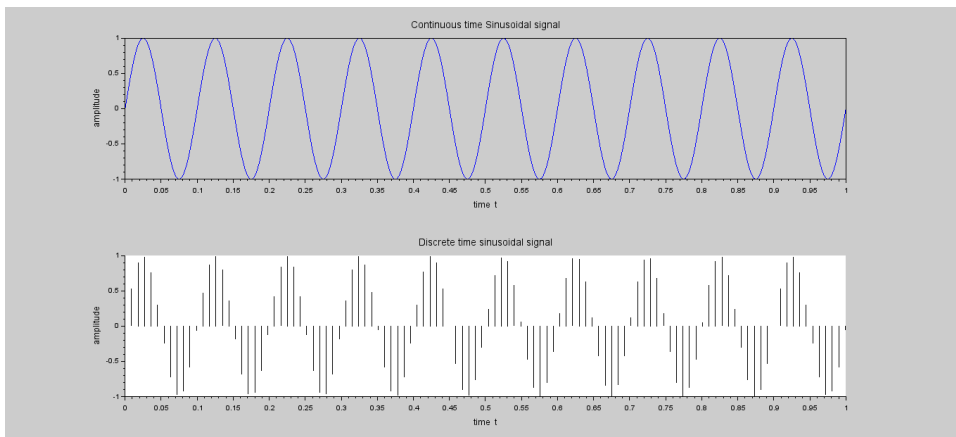


Figure 1.3: Basic Signals Generation

Experiment: 2

Perform Fast Fourier Transform

check Appendix [AP 1](#) for dependency:

```
idftfunction.sci
```

Scilab code Solution 2.2 Inverse DFT

```
1 // Experiment Number : 2.2
2 //Write a program to find the IDFT of a discrete
   Frequency Domain signal
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14
15 clc;
```

```

16 clear;
17 close;
18
19 X=input('Enter the frequency domain signal X=');
20 N=length(X);
21 x=idft(X,N);
22 disp('IDFT of X(K) is ')
23 disp(x);
24 n=0:1:N-1
25 plot2d3(n,x);
26 xlabel('Discrete time n');
27 ylabel('Amplitude');
28 title('IDFT or time domain signal x(n)');
29
30
31
32
33 // Enter the frequency domain signal X=[4 0 0 0]
34
35 //”IDFT of X(K) is”
36 // 1. 1. 1. 1.

```

Scilab code Solution 2.3 FFT

```

1 // Experiment Number : 2
2 //Write a program to find the FFT and Inverse FFT of
  a discrete time signal
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
  Number :
6 // Course Instructor:K.Manohar
7 // Matrusri Engineering College ,Hyderabad

```

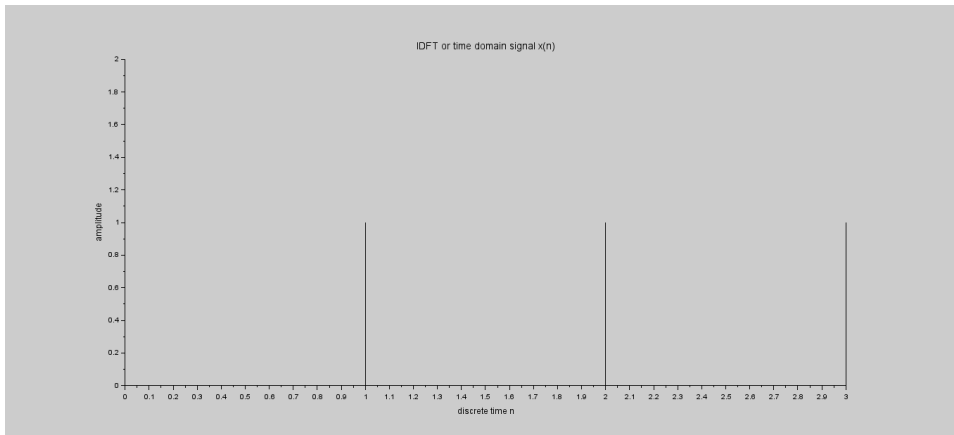


Figure 2.1: Inverse DFT

```

8 //
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
18 //Input time domain signal
19
20 x=input ('Enter the time domain sequence x=');
21 N=length(x); //Finding the length of input signal
22
23 //FFT of a signal
24 y=fft(x); //Finding FFT of a sequence
25 disp('Frequency domain signal is ');
26 disp(y);
27 y1=abs(y); //Finding the magnitude response
28 disp('Magnitude Response is ');
29 disp(y1);
30 y2=atan(imag(y),real(y)); //Finding the phase

```

```

        response
31 disp('Phase Response is ');
32 disp(y2);
33
34 //Plotting the input time domain signal
35
36 n=0:1:N-1
37 subplot(2,2,1);
38 plot2d3(n,x);
39 xlabel('Discrete time n');
40 ylabel('Amplitude');
41 title('Input time domain signal');
42
43 //Plotting the magnitude spectrum
44
45 k=0:1:N-1
46 subplot(2,2,2);
47 plot2d3(k,y1);
48 xlabel('Discrete frequency k');
49 ylabel('Amplitude');
50 title('Magnitude spectrum of FFT signal');
51
52 //Plotting the phase spectrum
53
54 subplot(2,2,3);
55 plot2d3(k,y2);
56 xlabel('Discrete frequency k');
57 ylabel('Phase angle');
58 title('Phase spectrum of FFT signal');
59
60 // Finding Inverse Fast Fourier Transform
61 z=ifft(y);
62 disp('Inverse Fast Fourier Transform is ');
63 disp(z);
64
65 //Plotting Inverse FFT signal
66
67 subplot(2,2,4);

```

```

68 plot2d3(n,z);
69 xlabel('Discrete time n');
70 ylabel('Amplitude');
71 title('Inverse FFT or time domain signal');
72
73
74 //Enter the time domain sequence x=[1 2 3 4]
75
76
77 // Frequency domain signal is
78
79 // 10. -2. + 2.i -2. -2. - 2.i
80
81 // Magnitude Response is
82
83 // 10. 2.8284271 2. 2.8284271
84
85 // Phase Response is
86
87
88 // column 1 to 3
89
90 // 0. 2.3561945 3.1415927
91
92 // column 4
93
94 // -2.3561945
95
96 // Inverse Fast Fourier Transform is
97
98 // 1. 2. 3. 4.

```

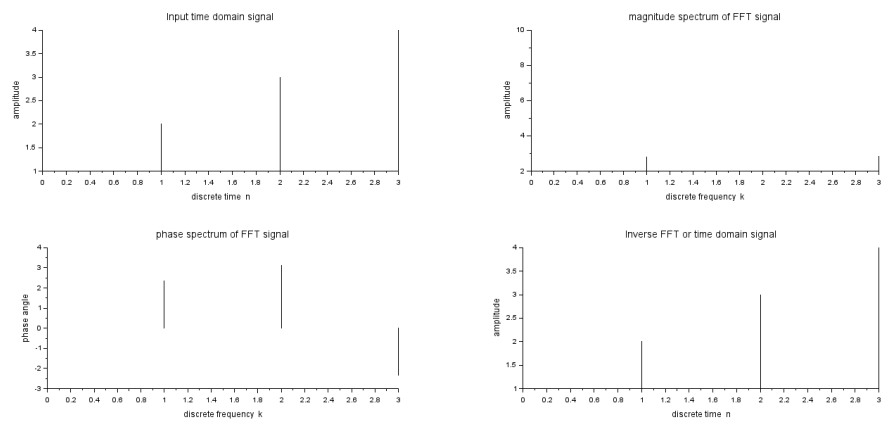


Figure 2.2: FFT

Experiment: 3

Perform Linear convolution.

Scilab code Solution 3.1 Linear Convolution

```
1 // Experiment Number : 3
2 //Write a program to find the linear convolution of
   two discrete time signals
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
18 //Generating and plotting the input signal
19
```

```

20 x=input('Enter the time domain sequence x=');
21 N1=length(x); //Finding the length of input signal
22 n1=0:1:N1-1
23 subplot(3,1,1);
24 plot2d3(n1,x);
25 xlabel('Discrete time n');
26 ylabel('Amplitude');
27 title('Time domain input signal x(n)');
28
29 //Generating and plotting the impulse response of
    the system
30
31 h=input('Enter the impulse response of the system h
    =');
32 N2=length(h);
33 n2=0:1:N2-1
34 subplot(3,1,2);
35 plot2d3(n2,h);
36 xlabel('Discrete time n');
37 ylabel('Amplitude');
38 title('Impulse response of the system h(n)');
39
40 //Generating and plotting the linear convolution of
    two discrete time signals
41 y=conv(x,h);
42 disp('Linear Convolution of input signal and impulse
    response of the system is:')
43 disp(y);
44 N=length(y);
45 n3=0:1:N-1
46 subplot(3,1,3);
47 plot2d3(n3,y);
48 xlabel('Discrete time n3');
49 ylabel('Amplitude');
50 title('Linear convolution function y(n3)');
51
52
53

```

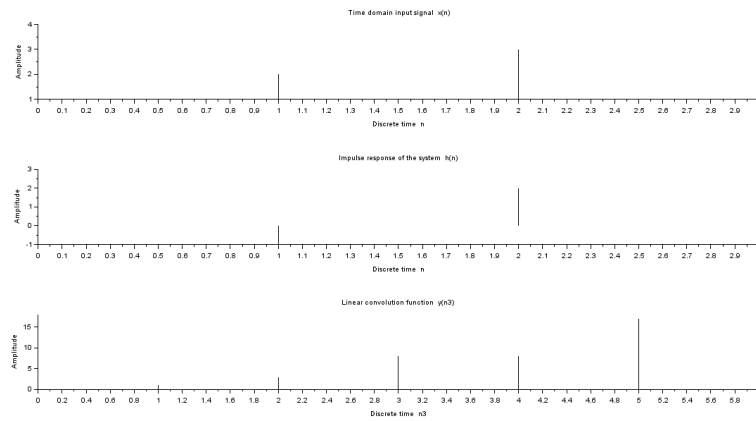


Figure 3.1: Linear Convolution

```

54
55 //Enter the time domain sequence  x=[1 2 3 4]
56
57 //Enter the impulse response of the system  h=[1 -1
    2 3]
58
59
60 //  "Linear Convolution of input signal and impulse
    response of the system is:"
61
62 //  1.   1.   3.   8.   8.   17.   12.

```

Experiment: 4

Perform Circular Convolutions.

Scilab code Solution 4.1 Circular Convolution

```
1 // Experiment Number : 4
2 //Write a program to find the Circular convolution
   of two discrete time signals
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
18 //Generating and plotting the input signal
19
```

```

20 x=input('Enter the time domain sequence x=');
21 disp(x);
22 N1=length(x); //finding the length of input signal
23 n1=0:1:N1-1
24 subplot(3,1,1);
25 plot2d3(n1,x);
26 xlabel('Discrete time n');
27 ylabel('Amplitude');
28 title('Time domain input signal x(n)');
29
30 //Generating and plotting the impulse response of
    the system
31
32 h=input('Enter the impulse response of the system h
    =');
33 disp(h);
34 N2=length(h);
35 n2=0:1:N2-1
36 subplot(3,1,2);
37 plot2d3(n2,h);
38 xlabel('Discrete time n');
39 ylabel('Amplitude');
40 title('Impulse response of the system h(n)');
41
42 //Generating and plotting the circular convolution
    of two discrete time signals
43
44 N3=max(N1,N2);
45 x1=[x,zeros(1,N3-N1)]; //Zero padding to input
    sequence
46 h1=[h,zeros(1,N3-N2)]; //Zero padding to impulse
    response sequence
47 X1=fft(x1,-1); //DFT Computation of input
48 H1=fft(h1,-1); //DFT Computation of impulse
    response
49 Y=X1.*H1; //output sequence in frequency domain
50 y=fft(Y,1) ; //IDFT Computation or output
    sequence in time domain

```

```

51 disp('Circular Convolution Sequence y[n]=',y);
52 n3=0:1:N3-1
53 subplot(3,1,3);
54 plot2d3(n3,y);
55 xlabel('Discrete time n3');
56 ylabel('Amplitude');
57 title('Circular convolution function y(n3)');
58
59
60
61
62 //Enter the time domain sequence x=[1 2 3 4]
63
64
65 // 1. 2. 3. 4.
66 //Enter the impulse response of the system h=[2 4
67 1]
68
69 // 2. 4. 1.
70
71 // "Circular Convolution Sequence y[n]="
72
73 // 21. 12. 15. 22.

```

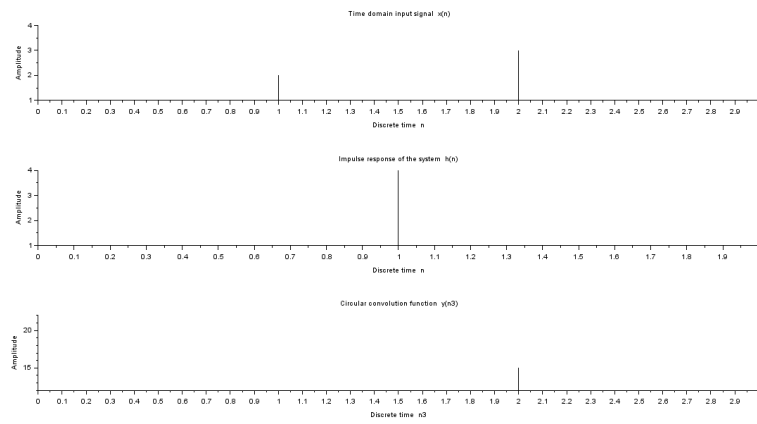


Figure 4.1: Circular Convolution

Experiment: 5

Perform FIR filters design using different window functions.

Scilab code Solution 5.1 FIR Filter Design

```
1 // Experiment Number : 5
2 //Write a program to generate Lowpass FIR Filter
   using different window techniques
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14
15 clc;
```

```

16 clear;
17 close;
18
19 fc=input ('Enter the cutoff frequency fc=');
20 fs=input ('Enter the sampling frequency fs=');
21 N=input ('Enter the order of filter N=');
22
23 //Finding the magnitude response of Lowpass FIR
    Filter using Rectangular window technique
24
25 w1 =(2*%pi)*(fc/fs);
26 disp('Digital cutoff frequency in radians:');
27 disp(w1);
28 wc1 =w1/%pi;
29 disp('Normalized digital cutoff frequency in radians
    :');
30 disp(wc1);
31 [wft,wfm,fr]=wfir('lp',N +1,[wc1/2,0], 're',[0,0]);
    //filter design
32 disp('Impulse response of Lowpass FIR filter using
    Rectangular window technique:h(n)=');
33 disp(wft);
34 a=gca();
35 subplot(2,2,1);
36 plot(2*fr,wfm);
37 //Labeling the axes and title for the figure
38 xlabel('Normalized digital frequency w');
39 ylabel('Magnitude ');
40 title('Magnitude response of Lowpass FIR Filter
    using Rectangular window');
41
42 //Finding the magnitude response of Lowpass FIR
    Filter using Triangular window technique
43
44 [wft,wfm,fr]=wfir('lp',N +1,[wc1/2,0], 'tr',[0,0]);
    //filter design
45 disp('Impulse response of Lowpass FIR filter using
    Triangular window technique:h(n)=');

```

```

46 disp(wft);
47 a=gca();
48 subplot(2,2,2);
49 plot(2*fr,wfm);
50 //Labeling the axes and title for the figure
51 xlabel('Normalized digital frequency w');
52 ylabel('Magnitude ');
53 title('Magnitude response of Lowpass FIR Filter
        using Triangular window');
54
55 //Finding the magnitude response of Lowpass FIR
    Filter using Hamming window technique
56
57 [wft,wfm,fr]=wfir('lp',N +1,[wc1/2,0],'hm',[0,0]);
    //filter design
58 disp('Impulse response of Lowpass FIR filter using
        Hamming window technique:h(n)=');
59 disp(wft);
60 a=gca();
61 subplot(2,2,3);
62 plot(2*fr,wfm);
63 //Labeling the axes and title for the figure
64 xlabel('Normalized digital frequency w');
65 ylabel('Magnitude ');
66 title('Magnitude response of Lowpass FIR Filter
        using Hamming window ');
67
68 //Finding the magnitude response of Lowpass FIR
    Filter using Hanning window technique
69
70 [wft,wfm,fr]=wfir('lp',N +1,[wc1/2,0],'hn',[0,0]);
    //filter design
71 disp('Impulse response of Lowpass FIR filter using
        Hanning window technique :h(n)=');
72 disp(wft);
73 a=gca();
74 subplot(2,2,4);
75 plot(2*fr,wfm);

```

```

76 //Labeling the axes and title for the figure
77 xlabel('Normalized digital frequency w');
78 ylabel('Magnitude ');
79 title('Magnitude response of Lowpass FIR Filter
      using Hanning window');
80
81
82 //Enter the cutoff frequency fc=1200
83
84 //Enter the sampling frequency fs=10000
85
86 //Enter the order of filter N=3
87
88
89 // "Digital cutoff frequency in radians:"
90
91 // 0.7539822
92
93 // "Normalized digital cutoff frequency in radians
   :":
94
95 // 0.24
96
97 // "Impulse response of Lowpass FIR filter using
   Rectangular window technique:h(n)="
98
99 // 0.1920103 0.2343554 0.2343554 0.1920103
100
101 // "Impulse response of Lowpass FIR filter using
   Triangular window technique:h(n)="
102
103 // 0.0768041 0.1874843 0.1874843 0.0768041
104
105 // "Impulse response of Lowpass FIR filter using
   Hamming window technique:h(n)="
106
107 // 0.0153608 0.1804536 0.1804536 0.0153608
108

```

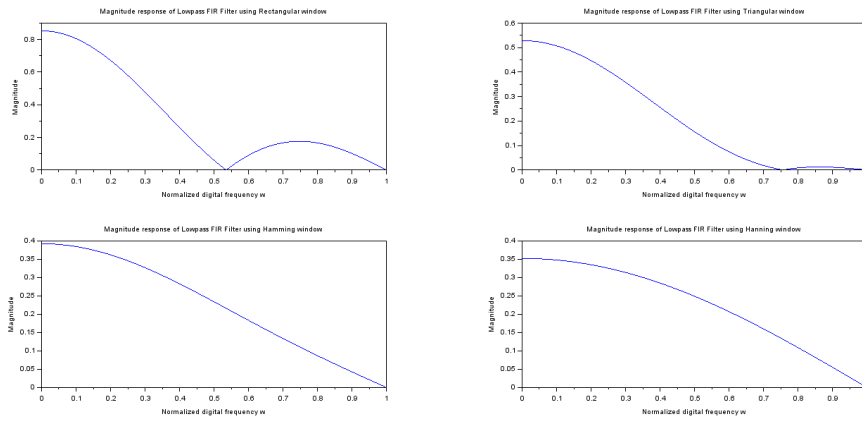


Figure 5.1: FIR Filter Design

```

109 // "Impulse response of Lowpass FIR filter using
110 // Hanning window technique :h(n)="
111 // 0. 0.1757665 0.1757665 0.

```

Experiment: 6

Perform IIR filters design: Butterworth and Chebyshev.

Scilab code Solution 6.1 Butterworth Filter

```
1 // Experiment Number : 6.1
2 //Write a program to generate Butterworth lowpass ,
   highpass , bandpass and bandstop IIR Filter
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8 //
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
```

```

18 fc=input ('Enter the cutoff frequency fc=');
19 fs=input ('Enter the sampling frequency fs=');
20 N=input ('Enter the order of the filter N=');
21 fp=2*fc/fs;
22
23 //Generating lowpass Butterworth IIR filter
24
25 [Hz1]=iir(N, 'lp', 'butt', [fp/2,0], [0,0]);
26 [Hw1,w1]=frmag(Hz1,256);
27 subplot(2,2,1);
28 plot2d3(w1,abs(Hw1));
29 xlabel('Frequency');
30 ylabel('Magnitude');
31 title('Butterworth lowpass IIR filter');
32
33
34 //Generating Highpass Butterworth IIR filter
35
36 [Hz2]=iir(N, 'hp', 'butt', [fp/2,0], [0,0]);
37 [Hw2,w2]=frmag(Hz2,256);
38 subplot(2,2,2);
39 plot2d3(w2,abs(Hw2));
40 xlabel('Frequency');
41 ylabel('Magnitude');
42 title('Butterworth highpass IIR filter');
43
44 //Generating Bandpass Butterworth IIR filter
45
46 [Hz3]=iir(N, 'bp', 'butt', [fp/1.2,fp/3], [0,0]);
47 [Hw3,w3]=frmag(Hz3,256);
48 subplot(2,2,3);
49 plot2d3(w3,abs(Hw3));
50 xlabel('Frequency');
51 ylabel('Magnitude');
52 title('Butterworth Bandpass IIR filter');
53
54 //Generating bandstop Butterworth IIR filter
55

```

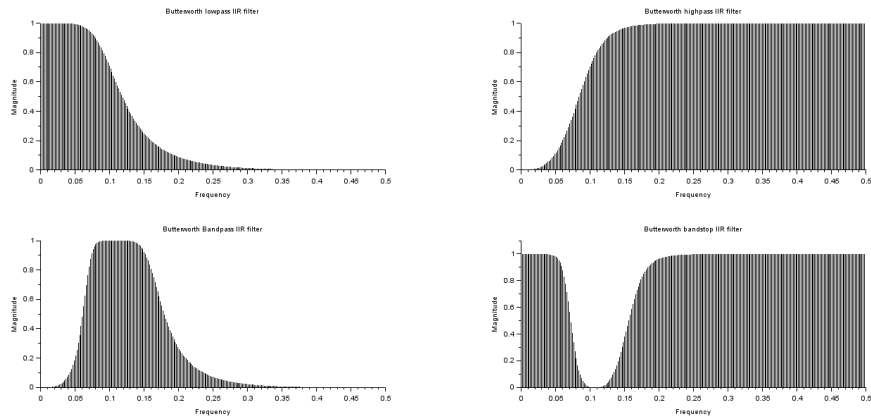


Figure 6.1: Butterworth Filter

```

56 [Hz4]=iir(N, 'sb', 'butt', [fp/1.2, fp/3], [0,0]);
57 [Hw4,w4]=frmag(Hz4,256);
58 subplot(2,2,4);
59 plot2d3(w4, abs(Hw4));
60 xlabel('Frequency');
61 ylabel('Magnitude');
62 title('Butterworth bandstop IIR filter');
63
64
65
66 //Enter the cutoff frequency fc=1000
67
68 //Enter the sampling frequency fs=10000
69
70 //Enter the order of the filter N=3

```

Scilab code Solution 6.2 Type 1 Chebyshev Filter

```

1 // Experiment Number : 6.2

```



```

2 //Write a program to generate Type-1 Chebyshev
   lowpass, highpass, bandpass and bandstop IIR
   Filter
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor:K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8 //
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
18 fc=input ('Enter the cutoff frequency fc=');
19 fs=input ('Enter the sampling frequency fs=');
20 N=input ('Enter the order of the filter N=');
21 fp=2*fc/fs;
22
23 //Generating lowpass Type-1 Chebyshev IIR filter
24
25 [Hz1]=iir(N, 'lp', 'cheb1', [fp/2, 0], [0.2, 0]);
26 [Hw1, w1]=frmag(Hz1, 256);
27 subplot(2, 2, 1);
28 plot2d3(w1, abs(Hw1));
29 xlabel('Frequency');
30 ylabel('Magnitude');
31 title(' Lowpass Type-I chebyshev IIR filter ');
32
33 //Generating Highpass Type-1 Chebyshev IIR filter
34
35 [Hz2]=iir(N, 'hp', 'cheb1', [fp/2, 0], [0.2, 0]);
36 [Hw2, w2]=frmag(Hz2, 256);

```

```

37 subplot(2,2,2);
38 plot2d3(w2,abs(Hw2));
39 xlabel('Frequency');
40 ylabel('Magnitude');
41 title(' Highpass Type-I chebyshev IIR filter ');
42
43 //Generating Bandpass Type-1 Chebyshev IIR filter
44
45 [Hz3]=iir(N,'bp','cheb1',[fp/1.2,fp/3],[0.2,0]);
46 [Hw3,w3]=frmag(Hz3,256);
47 subplot(2,2,3);
48 plot2d3(w3,abs(Hw3));
49 xlabel('Frequency');
50 ylabel('Magnitude');
51 title(' Bandpass Type-I chebyshev IIR filter ');
52
53 //Generating bandstop Type-1 Chebyshev IIR filter
54
55 [Hz4]=iir(N,'sb','cheb1',[fp/1.2,fp/3],[0.2,0]);
56 [Hw4,w4]=frmag(Hz4,256);
57 subplot(2,2,4);
58 plot2d3(w4,abs(Hw4));
59 xlabel('Frequency');
60 ylabel('Magnitude');
61 title('Bandstop Type-I chebyshev IIR filter ');
62
63
64
65 //Enter the cutoff frequency fc=1000
66
67 //Enter the sampling frequency fs=10000
68
69 //Enter the order of the filter N=3

```

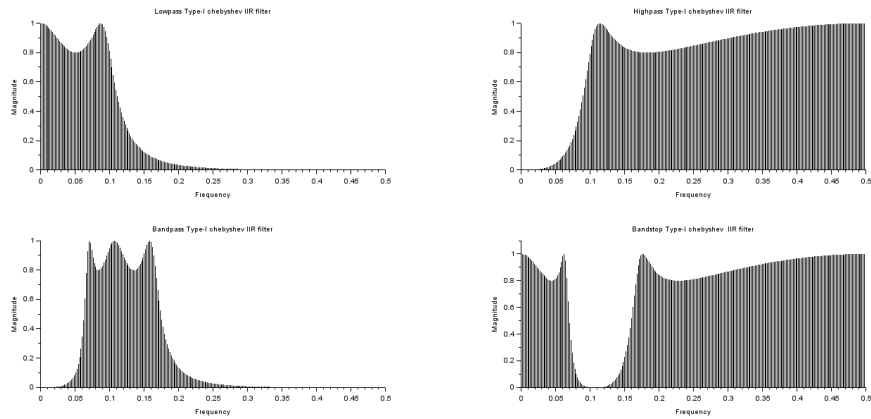


Figure 6.2: Type 1 Chebyshev Filter

Scilab code Solution 6.3 Type 2 Chebyshev Filter

```

1 // Experiment Number : 6.3
2 //Write a program to generate Type-2 Chebyshev
  lowpass , highpass , bandpass and bandstop IIR
  Filter
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
  Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8 //
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
18 fc=input ('Enter the cutoff frequency fc=');

```

```

19 fs=input ('Enter the sampling frequency fs=');
20 N=input ('Enter the order of the filter N=');
21 fp=2*fc/fs;
22
23 //Generating lowpass Type-2 Chebyshev IIR filter
24
25 [Hz1]=iir(N, 'lp', 'cheb2', [fp/2, 0], [0, 0.1]);
26 [Hw1, w1]=frmag(Hz1, 256);
27 subplot(2, 2, 1);
28 plot2d3(w1, abs(Hw1));
29 xlabel('Frequency');
30 ylabel('Magnitude');
31 title(' Lowpass Type-2 chebyshev IIR filter ');
32
33 //Generating Highpass Type-2 Chebyshev IIR filter
34
35 [Hz2]=iir(N, 'hp', 'cheb2', [fp/2, 0], [0, 0.1]);
36 [Hw2, w2]=frmag(Hz2, 256);
37 subplot(2, 2, 2);
38 plot2d3(w2, abs(Hw2));
39 xlabel('Frequency');
40 ylabel('Magnitude');
41 title(' Highpass Type-2 chebyshev IIR filter ');
42
43 //Generating Bandpass Type-2 Chebyshev IIR filter
44
45 [Hz3]=iir(N, 'bp', 'cheb2', [fp/1.2, fp/3], [0, 0.1]);
46 [Hw3, w3]=frmag(Hz3, 256);
47 subplot(2, 2, 3);
48 plot2d3(w3, abs(Hw3));
49 xlabel('Frequency');
50 ylabel('Magnitude');
51 title(' Bandpass Type-2 chebyshev IIR filter ');
52
53 //Generating bandstop Type-2 Chebyshev IIR filter
54
55 [Hz4]=iir(N, 'sb', 'cheb2', [fp/1.2, fp/3], [0, 0.1]);
56 [Hw4, w4]=frmag(Hz4, 256);

```

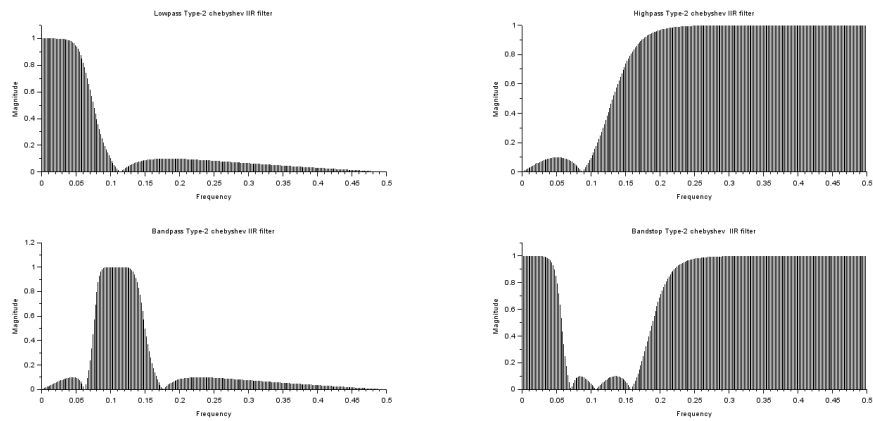


Figure 6.3: Type 2 Chebyshev Filter

```

57 subplot(2,2,4);
58 plot2d3(w4,abs(Hw4));
59 xlabel('Frequency');
60 ylabel('Magnitude');
61 title('Bandstop Type-2 chebyshev IIR filter');
62
63
64
65 //Enter the cutoff frequency fc=1000
66
67 //Enter the sampling frequency fs=10000
68
69 //Enter the order of the filter N=3

```

Experiment: 7

Perform Interpolation and Decimation.

Scilab code Solution 7.1 Interpolation

```
1 // Experiment Number : 7(a)
2 //Write a program to perform the interpolation of a
  discrete time signal
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
  Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
```

```

18 //Generation of input signal
19
20 N=input ('Enter the number of points in input signal
           N=');
21 n=0:1:N-1
22 A=input ('Enter the amplitude of input sinusoidal
           signal A=');
23 fo=input ('Enter the frequency of input sinusoidal
            signal fo=');
24 x=A*sin(2*%pi*fo*n);
25 disp('Samples of input signal are:')
26 disp(x);
27
28 //Plotting the input signal
29
30 subplot(2,1,1);
31 plot2d3(n,x);
32 xlabel('Discrete time n');
33 ylabel('Amplitude');
34 title('Input signal x(n)');
35
36 //Generation of interpolation signal
37
38 L=input ('Enter the interpolation factor L=');
39 n1=1:1:L*N;
40 x1=[zeros(1,L*N)];
41 j=1:L:L*N;
42 x1(j)=x;
43 disp('Samples of interpolated signal are:')
44 disp(x1);
45
46 //Plotting the interpolated signal
47
48 subplot(2,1,2);
49 plot2d3(n1,x1);
50 xlabel('Discrete time n');
51 ylabel('Amplitude');
52 title('Upsampled signal x(n/L)');

```

```

53
54 //Enter the number of points in input signal N=10
55
56 //Enter the amplitude of input sinusoidal signal A
    =1
57
58 //Enter the frequency of input sinusoidal signal fo
    =0.1
59
60
61 //”Samples of input signal are:”
62 //          column 1 to 3
63
64 //    0.    0.5877853    0.9510565
65
66 //          column 4 to 6
67
68 //    0.9510565    0.5877853    1.225D-16
69
70 //          column 7 to 9
71
72 //   -0.5877853   -0.9510565   -0.9510565
73
74 //          column 10
75
76 //   -0.5877853
77 //Enter the interpolation factor L=2
78
79 //”Samples of interpolated signal are:”
80
81
82 //          column 1 to 4
83
84 //    0.    0.    0.5877853    0.
85
86 //          column 5 to 8
87
88 //    0.9510565    0.    0.9510565    0.

```

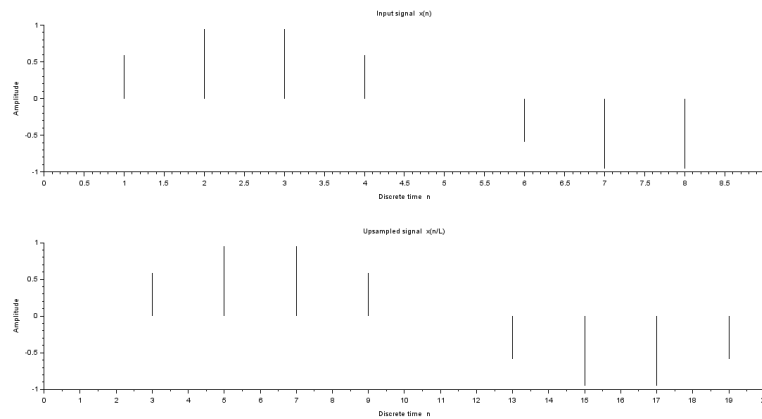



Figure 7.1: Interpolation

```

89
90 //          column 9 to 12
91
92 //    0.5877853    0.    1.225D-16    0.
93
94 //          column 13 to 16
95
96 //   -0.5877853    0.   -0.9510565    0.
97
98 //          column 17 to 20
99
100 //   -0.9510565    0.   -0.5877853    0.

```

Scilab code Solution 7.2 Decimation

```

1 // Experiment Number : 7(b)
2 // Write a program to perform the decimation of a
  discrete time signal
3 // Systems and Signal Processing Laboratory

```

```

4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8 //
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
17
18 //Generation of input signal
19
20 N=input ('Enter the number of points in input signal
   N=');
21 n=0:1:N-1
22 A=input ('Enter the amplitude of input sinusoidal
   signal A=');
23 fo=input ('Enter the frequency of input sinusoidal
   signal fo=');
24 x=A*sin(2*%pi*fo*n);
25 disp(x);
26
27 //Plotting the input signal
28
29 subplot(2,1,1);
30 plot2d3(n,x);
31 xlabel('Discrete time n');
32 ylabel('Amplitude');
33 title('Input signal x(n)');
34
35 //Generation of decimation signal
36 M=input ('Enter the decimation factor M=');
37 n1=1:1:N/M;

```

```

38 x1=x(1:M:N)
39 disp(x1);
40
41 // Plotting the decimation signal
42
43 subplot(2,1,2);
44 plot2d3(n1-1,x1);
45 xlabel('Discrete time n');
46 ylabel('Amplitude');
47 title('Decimated signal x(Mn)');
48
49 //Enter the number of points in input signal N=10
50
51 //Enter the amplitude of input sinusoidal signal A
    =1
52
53 //Enter the frequency of input sinusoidal signal fo
    =0.1
54
55
56
57 //          column 1 to 3
58
59 //    0.    0.5877853    0.9510565
60
61 //          column 4 to 6
62
63 //    0.9510565    0.5877853    1.225D-16
64
65 //          column 7 to 9
66
67 //   -0.5877853   -0.9510565   -0.9510565
68
69 //          column 10
70
71 //   -0.5877853
72 //Enter the decimation factor M=2
73

```

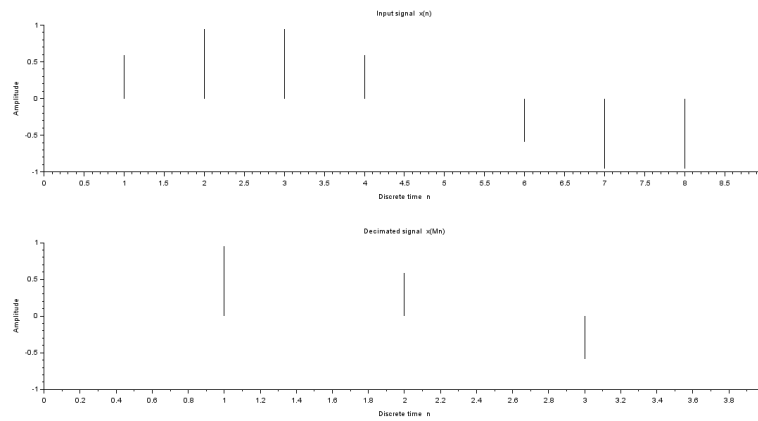


Figure 7.2: Decimation

```

74
75
76 //          column 1 to 3
77
78 //    0.    0.9510565    0.5877853
79
80 //          column 4 to 5
81
82 //   -0.5877853   -0.9510565

```

Experiment: 8

Perform Implementation of multi-rate systems.

Scilab code Solution 8.1 Multirate Systems

```
1 // Experiment Number : 8
2 //Write a program to implement the multirate systems
   with sampling rate conversion by a factor I/D or
   L/M
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.0.2
13
14 clc;
15 clear;
16 close;
```

```

17
18 L=input('Enter the upsampling factor L=');
19 M=input('Enter the downsampling factor M=');
20
21 //Generation of input signal
22
23 N=input ('Enter the number of points in input signal
           N=');
24 A=input ('Enter the amplitude of input sinusoidal
           signal A=');
25 fo=input ('Enter the frequency of input sinusoidal
           signal fo=');
26 n=0:1:N-1
27 x=A*sin(2*%pi*fo*n);
28
29 //Plotting the input signal
30
31 subplot(2,1,1);
32 plot2d3(n,x(1:30));
33 xlabel('Discrete time n');
34 ylabel('Amplitude');
35 title('Input signal x(n)');
36
37 // Multirate system sampling rate converted by a
           factor L/M signal
38 y=intdec(x,L/M);
39 disp('Samples of output signal are:')
40
41
42 //Plotting the multirate system sampling rate
           converted signal
43 m=0:(30*L/M)-1
44 subplot(2,1,2);
45 plot2d3(m,y(1:30*L/M));
46 xlabel('Discrete time m');
47 ylabel('Amplitude');
48 title('Multirate system sampling rate converted
           signal');

```

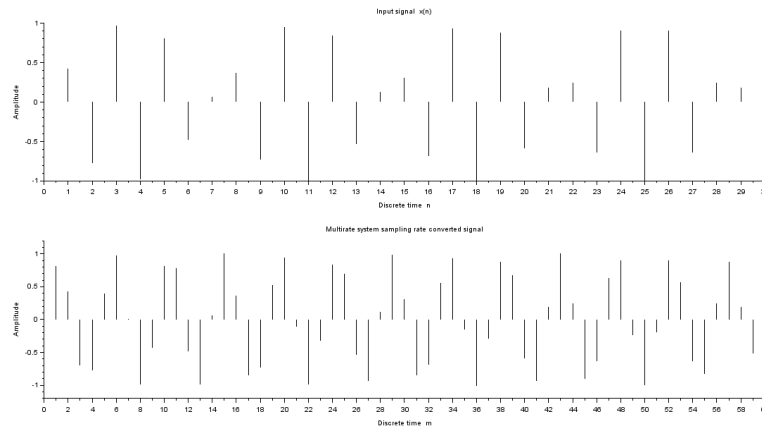


Figure 8.1: Multirate Systems

```

49
50
51 //Enter the upsampling factor L=10
52
53 //Enter the downsampling factor M=5
54
55 //Enter the number of points in input signal N=30
56
57 //Enter the amplitude of input sinusoidal signal A
  =1
58
59 //Enter the frequency of input sinusoidal signal fo
  =0.43

```

Experiment: 9

Perform Time response of non-linear systems.

Scilab code Solution 9.1 Non Linear Systems

```
1 // Experiment Number : 9
2 //Write a program to find the time response of
   n o n linear systems
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14 clc;
15 clear;
16 close;
17
```

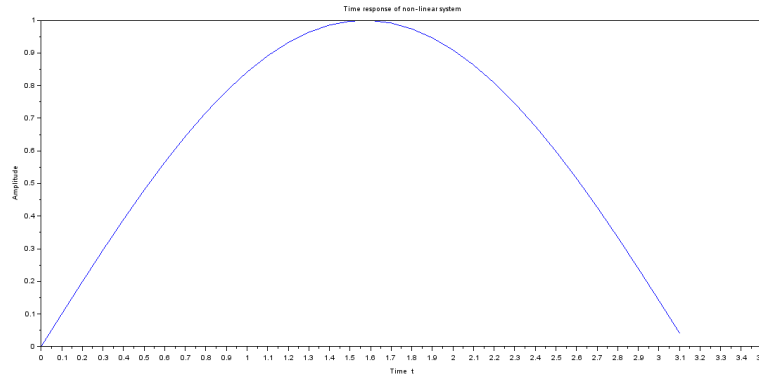



Figure 9.1: Non Linear Systems

```

18 //Non-linear system representation by a differential
    equation  $dy/dt=y^2-y*\sin(t)+\cos(t)$ 
19 function ydot=f(t, y)
20     ydot=y^2-y*sin(t)+cos(t)
21 endfunction
22
23 y0=0; //Initial condition y(0)=0
24 t0=0; //Initial time t(0)=0
25 t=0:0.1:%pi; //Time interval
26
27 //Finding the time response of non-linear system
28 y = ode(y0,t0,t,f);
29 plot(t,y) //Plotting the time response of non linear
    system
30
31 //Labeling the axes and title for the figure
32 xlabel('Time t');
33 ylabel('Amplitude');
34 title('Time response of non linear system');

```

Experiment: 10

Design of P, PI, PD and PID controllers

Scilab code Solution 10.1 P Controller

```
1 // Experiment Number : 10.1
2 //Write a program to design P-controllers and to
  find its time response
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
  Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14 clc;
15 clear;
16 close;
17
```

```

18 //Time Response of Open Loop System
19
20 num=poly([10], 's', 'coeff'); //Numerator input
21 den=poly([20 10 1], 's', 'coeff'); //Denominator
    input
22 q=syslin('c',num/den ) // Finding the transfer
    function of the system
23 t=0:0.05:2.5; //Time interval
24 p=csim('step',t,q); //Time Response of open loop
    system
25 subplot(211)
26 plot2d(t,p);
27 //Labeling the axes and title for the figure
28 xlabel('Time t');
29 ylabel('Amplitude');
30 title('Time Response of open loop system');
31
32
33 //Design of P-Controller and finding its time
    response
34
35 kp =300; //Designing parameter of P-Controller
36 num=poly([kp], 's', 'coeff');
37 den=poly([20+kp 10 1], 's', 'coeff');
38 q=syslin('c',num/ den) //P-Controller Transfer
    function
39 t =0:0.01:2;
40 p=csim('step',t,q); //Time Response of P-Controller
41 subplot (212)
42 plot2d(t,p);
43 //Labeling the axes and title for the figure
44 xlabel('Time t');
45 ylabel('Amplitude');
46 title('Time Response of P-Controller');

```

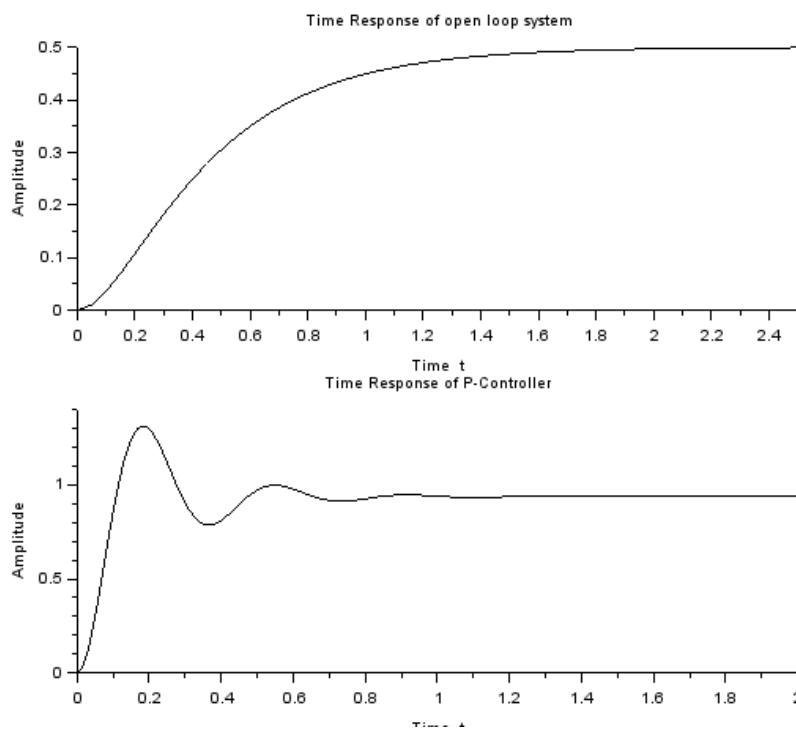


Figure 10.1: P Controller

Scilab code Solution 10.2 PI Controller

```
1 // Experiment Number : 10.2
2 //Write a program to design PI-controllers and to
  find its time response
3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
  Number :
6 // Course Instructor:K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14 clc;
15 clear;
16 close;
17
18 //Time Response of Open Loop System
19
20 num=poly([10], 's', 'coeff'); //Numerator input
21 den=poly([20 10 1], 's', 'coeff'); //Denominator
  input
22 q=syslin('c',num/den ) // Finging the transfer
  function of the system
23 t=0:0.05:2.5; //Time interval
24 p=csim('step',t,q); //Time Response of open loop
  system
25 subplot(211)
26 plot2d(t,p);
27 //Labeling the axes and title for the figure
```

```

28 xlabel('Time t');
29 ylabel('Amplitude');
30 title('Time Response of open loop system');
31
32
33
34
35
36 //Design of PI-Controller and finding its time
    response
37
38 kp =30; //Designing parameter of PI-Controller
39 ki =70; //Designing parameter of PI-Controller
40 num=poly([ki kp], 's', 'coeff');
41 den=poly([ki 20+kp 10 1], 's', 'coeff');
42 q=syslin('c', num/den ) //PI-Controller Transfer
    function
43 t =0:0.01:2;
44 p= csim('step', t, q); //Time Response of PI-
    Controller
45 subplot (212)
46 plot2d (t,p);
47 //Labeling the axes and title for the figure
48 xlabel('Time t');
49 ylabel('Amplitude');
50 title('Time Response of PI Controller');

```

Scilab code Solution 10.3 PD Controller

```

1 // Experiment Number : 10.3
2 //Write a program to design PD-controllers and to
    find its time response
3 //Systems and Signal Processing Laboratory

```

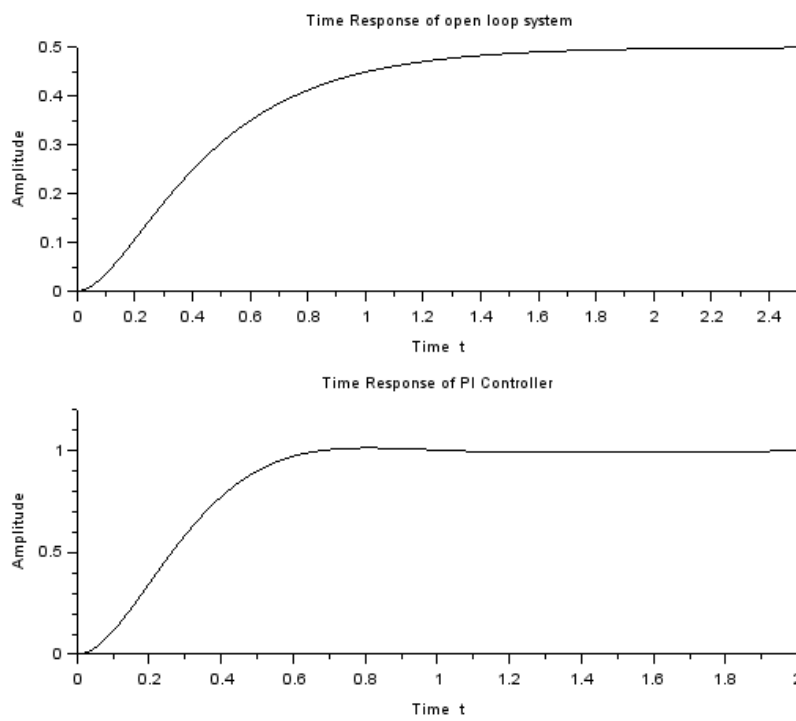


Figure 10.2: PI Controller

```

4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor :K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14 clc;
15 clear;
16 close;
17
18 //Time Response of Open Loop System
19
20 num=poly([10], 's', 'coeff'); //Numerator input
21 den=poly([20 10 1], 's', 'coeff'); //Denominator
   input
22 q=syslin('c',num/den ) // Finging the transfer
   function of the system
23 t=0:0.05:2.5; //Time interval
24 p=csim('step',t,q); //Time Response of open loop
   system
25 subplot(211)
26 plot2d(t,p);
27 //Labeling the axes and title for the figure
28 xlabel('Time t');
29 ylabel('Amplitude');
30 title('Time Response of open loop system');
31
32
33 //Design of PD-Controller and finding its time
   response
34
35 kp =300; //Designing parameter of PD-Controller
36 kd =10; //Designing parameter of PD-Controller

```

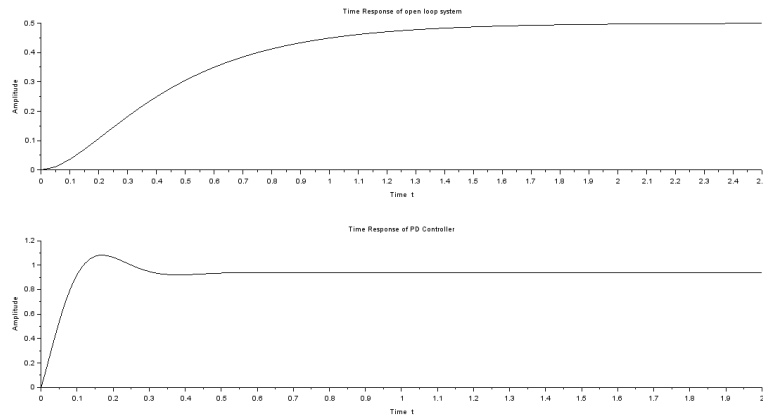



Figure 10.3: PD Controller

```

37 num=poly([kp kd], 's', 'coeff');
38 den=poly([20+kp 10+kd 1], 's', 'coeff');
39 q=syslin('c', num/den) //PD Controller Transfer
    function
40 t=0:0.01:2;
41 p= csim('step', t, q); //Time Response of PD
    Controller
42 subplot(212)
43 plot2d(t, p);
44 //Labeling the axes and title for the figure
45 xlabel('Time t');
46 ylabel('Amplitude');
47 title('Time Response of PD Controller');

```

Scilab code Solution 10.4 PID Controller

```

1 // Experiment Number : 10.4
2 //Write a program to design PID controllers and to
    find its time response

```

```

3 //Systems and Signal Processing Laboratory
4 //B.Tech III Year I Sem
5 // Student Name :                               Enrolment
   Number :
6 // Course Instructor:K.Manohar
7 // Matrusri Engineering College ,Hyderabad
8
9
10
11 // OS : Windows 10 . 1
12 // Scilab 6.1.0
13
14 clc;
15 clear;
16 close;
17
18 //Time Response of Open Loop System
19
20 num=poly([10], 's', 'coeff'); //Numerator input
21 den=poly([20 10 1], 's', 'coeff'); //Denominator
   input
22 q=syslin('c', num/den ) // Finging the transfer
   function of the system
23 t=0:0.05:2.5; //Time interval
24 p=csim('step', t, q); //Time Response of open loop
   system
25 subplot(211)
26 plot2d(t, p);
27 //Labeling the axes and title for the figure
28 xlabel('Time t');
29 ylabel('Amplitude');
30 title('Time Response of open loop system');
31
32
33 //Design of PID-Controller and finding its time
   response
34
35 kp =350; //Designing parameter of PID-Controller

```

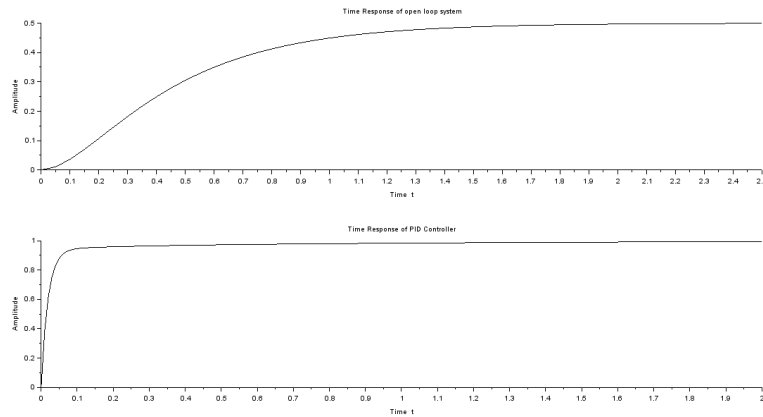


Figure 10.4: PID Controller

```

36 kd =50;      //Designing parameter of PID-Controller
37 ki =300;    //Designing parameter of PID-Controller
38 num=poly([ki kp kd], 's', 'coeff');
39 den=poly([ki 20+kp 10+kd 1], 's', 'coeff');
40 q=syslin('c', num/den) //PID-Controller Transfer
    function
41 t=0:0.01:2;
42 p=csim('step', t, q); //Time Response of PID
    Controller
43 subplot(212)
44 plot2d(t, p);
45 //Labeling the axes and title for the figure
46 xlabel('Time t');
47 ylabel('Amplitude');
48 title('Time Response of PID Controller');

```

Appendix

Scilab code AP 11 //Generating the IDFT function

```
2 function x=idft(X,N)
3     N=length(X);
4     for k=0:1:N-1
5         for n=0:1:N-1
6             p=exp(%i*2*%pi*k*n/N);
7             x2(k+1,n+1)=p;
8         end
9     end
10    x=X*x2/N;
11 endfunction
```

IDFT Function
