

Scilab Manual for  
Principles of Communication  
by Prof Monali Chaudhari  
Electronics Engineering  
VESIT<sup>1</sup>

Solutions provided by  
Nandan Hegde  
Electronics Engineering  
V.E.S.I.T/Mumbai

June 2, 2025

<sup>1</sup>Funded by a grant from the National Mission on Education through ICT,  
<http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes  
written in it can be downloaded from the "Migrated Labs" section at the website  
<http://scilab.in>



# Contents

<b>List of Scilab Solutions</b>	<b>3</b>
<b>1 To plot the magnitude and phase response of continuous time signal</b>	<b>5</b>
<b>2 To plot Amplitude Modulated wave and its frequency spectrum</b>	<b>9</b>
<b>3 To represent a function in exponential Fourier series</b>	<b>13</b>
<b>4 To plot continuous time fourier transform of a continuous time signal</b>	<b>17</b>
<b>5 To plot continuous time fourier transform of a constant</b>	<b>21</b>

# List of Experiments

Solution 1.1	To plot the magnitude and phase response of continuous time signal . . . . .	5
Solution 2.1	To plot Amplitude Modulated wave and its frequency spectrum . . . . .	9
Solution 3.1	To represent a function in exponential Fourier series	13
Solution 4.1	To plot continuous time fourier transform of a continuous time signal . . . . .	17
Solution 5.1	To plot continuous time fourier transform of a constant . . . . .	21

# List of Figures

1.1	To plot the magnitude and phase response of continuous time signal . . . . .	7
1.2	To plot the magnitude and phase response of continuous time signal . . . . .	8
2.1	To plot Amplitude Modulated wave and its frequency spectrum	10
2.2	To plot Amplitude Modulated wave and its frequency spectrum	11
3.1	To represent a function in exponential Fourier series . . . . .	14
3.2	To represent a function in exponential Fourier series . . . . .	15
4.1	To plot continuous time fourier transorm of a continuous time signal . . . . .	18
4.2	To plot continuous time fourier transorm of a continuous time signal . . . . .	19
5.1	To plot continuous time fourier transform of a constant . . . . .	22
5.2	To plot continuous time fourier transform of a constant . . . . .	23

# Experiment: 1

To plot the magnitude and phase response of continuous time signal

**Scilab code Solution 1.1** To plot the magnitude and phase response of continuous time signal

```
1 //To plot the magnitude and phase response of
   continuous time signal
2 //scilab 5.4.1;64 bit(windows 8)
3 stacksize max
4 clc; clear;close;
5 A =1; // Amplitude
6 Dt = 0.005;
7 t = 0: Dt :10;
8 xt = exp(-A*t);
9 // Continuous time Fourier Transform
10 Wmax =2*%pi*1; // Analog Frequency = 1Hz
11 K = 4;
12 k = 0:(K/1000):K;
13 W = k* Wmax /K;
14 XW = xt*exp(-sqrt(-1)*t'*W)*Dt
15 XW_Mag =abs(XW);
```

```

16 W = [-mtlb_fliplr(W),W(2:1001)]; // Omega from -Wmax
      to Wmax
17 XW_Mag=[mtlb_fliplr(XW_Mag ),XW_Mag(2:1001)];
18 [XW_Phase ,db] = phasemag (XW);
19 XW_Phase = [-mtlb_fliplr( XW_Phase ),XW_Phase
      (2:1001)];
20 // Plotting Continuous Time Signal
21 subplot (3,1,1)
22 a=gca();
23 a.y_location = "origin";
24 plot2d(t,xt);
25 xlabel('t in sec .');
26 ylabel(' x(t) ')
27 title(' Continuous Time Signal ' )
28
29 // Plotting Magnitude Response of CTS
30 subplot (3 ,1 ,2);
31 a = gca ();
32 a.y_location = "origin";
33 plot2d(W, XW_Mag,style=5 );
34 xlabel (' Frequency in Radians / Seconds---> W' );
35 ylabel (' abs (X(jW)) ' )
36 title ( 'Magnitude Response (CTFT) ' )
37 // Plotting Phase Reponse of CTS
38 subplot (3 ,1 ,3);
39 a =gca();
40 a.y_location="origin";
41 a.x_location="origin";
42 plot2d(W, XW_Phase *%pi/180,style=3);
43 xlabel(' Frequency in Radians / Seconds---> W');
44 ylabel('<X(jW) ')
45 title(' Phase Response (CTFT) in Radians ' )
46 mprintf (' | F(w)|= 1/sqrt(a^2+w^2) and\n Theta(w)=-
atan(w/a) ')

```

---

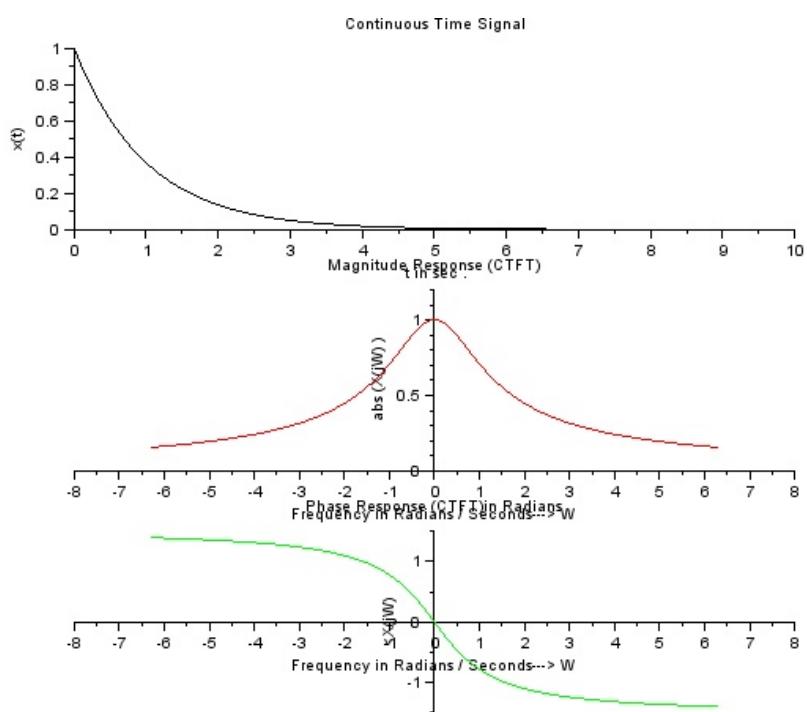


Figure 1.1: To plot the magnitude and phase response of continuous time signal

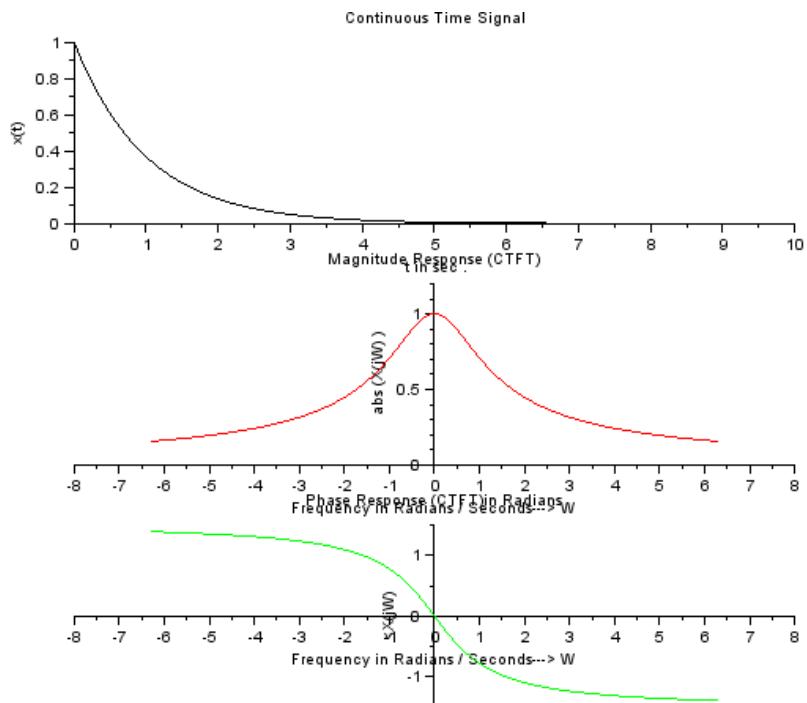


Figure 1.2: To plot the magnitude and phase response of continuous time signal

## Experiment: 2

To plot Amplitude Modulated wave and its frequency spectrum

**Scilab code Solution 2.1** To plot Amplitude Modulated wave and its frequency spectrum

```
1 //To plot Amplitude Modulated wave and its frequency
   spectrum
2 //scilab 5.4.1;64 bit (windows 8)
3 clf();
4 clc
5 deff (" [ y]=f (x) " , " y=Ec*(1+ma*( sin (wm*x) )) *sin (wc*x) ")
6 Ec=10 , ma=0.5 , wm=10000*%pi , wc=2*%pi*1e7
7 x=[0:0.01:20]*%pi/10;
8 subplot (2,1,1)
9 fplot2d(x,f)
10 xlabel("t" , " fontsize" , 3);
11 ylabel("Modulated Wave" , " fontsize" , 3 , " color" , "
```

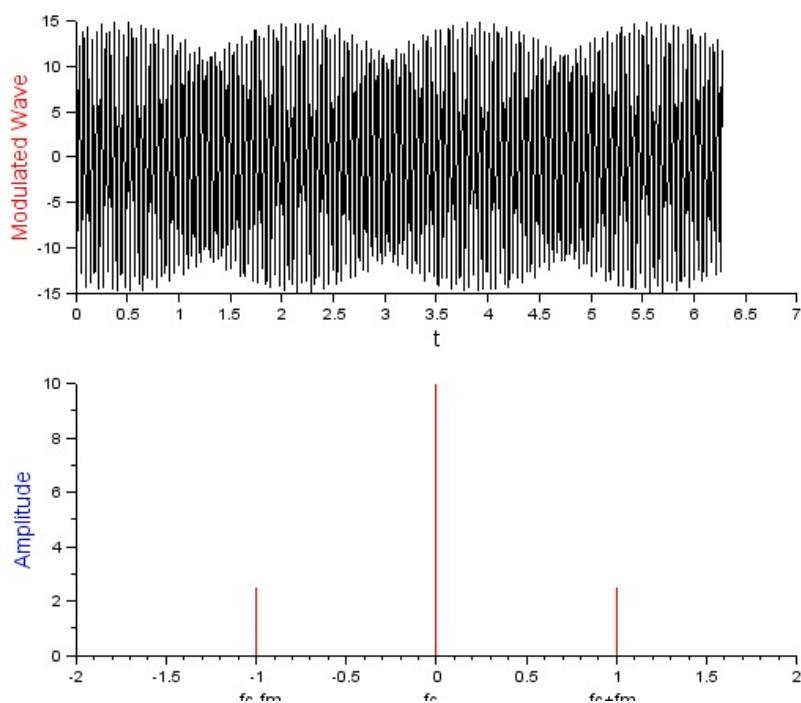


Figure 2.1: To plot Amplitude Modulated wave and its frequency spectrum

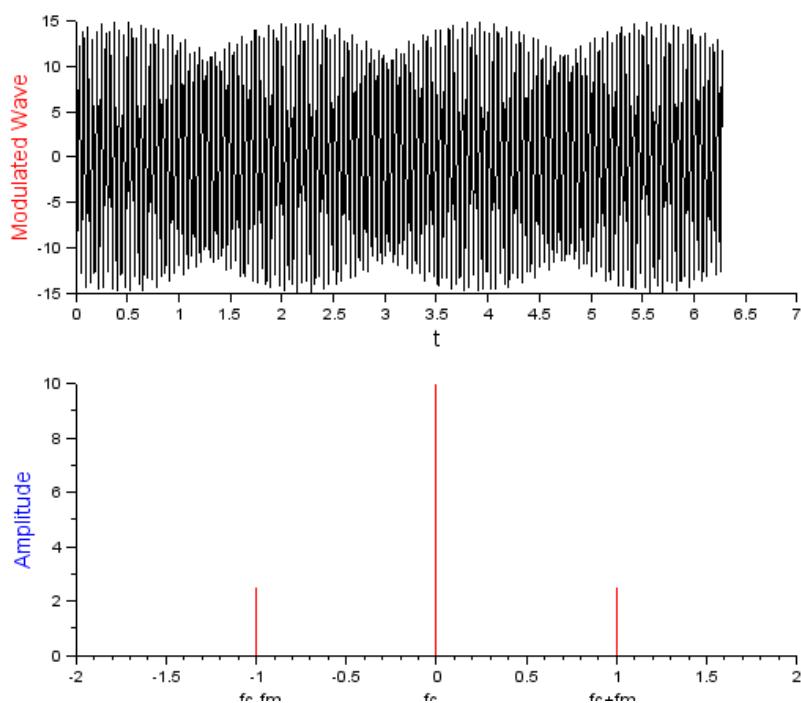


Figure 2.2: To plot Amplitude Modulated wave and its frequency spectrum

```

    red”);
12 Fc=wc/(2*pi)
13 Fm=wm/(2*pi)
14 Fusb=(wm+wc)/(2*pi)
15 Flsb=(wm-wc)/(2*pi)
16 mprintf('USB freq=%d k5Hz\nUSB amplitude=%f V\nLSB
           freq=%d kHz\nLSB amplitude=%f V\nCarrier
           amplitude=%d V',Fusb*1e-3,2.5,Flsb*-1e-3,2.5,10)
17 F=[0,2.5,10,2.5,0]
18 T=[-2,-1,0,1,2]
19 subplot(2,1,2)
20 plot2d3(T,F,5)
21 xlabel("Freq", "fontsize", 3);
22 ylabel("Amplitude", "fontsize", 3, "color", "blue");
23 xlabel("fc-fm", "fontstyle", "italic", "color", "red")
           fc
           fc+fm", "fontsize"
           , 2);

```

---

# Experiment: 3

## To represent a function in exponential Fourier series

**Scilab code Solution 3.1** To represent a function in exponential Fourier series

```
1 //To represent a function in exponential Fourier
   series
2 //scilab 5.4.1;64 bit(windows 8)
3 clc
4 close
5 clear
6 V=1
7 t0=1,T=1,w0=2*3.14/T,P=1
8 t=0:0.01:3
9 f=V*abs(sin(%pi*t))
10 //The Expo fourier series coeff
11 disp('The Expo fourier series coeff are: for n=-5 to
      5')
12 a=1
```

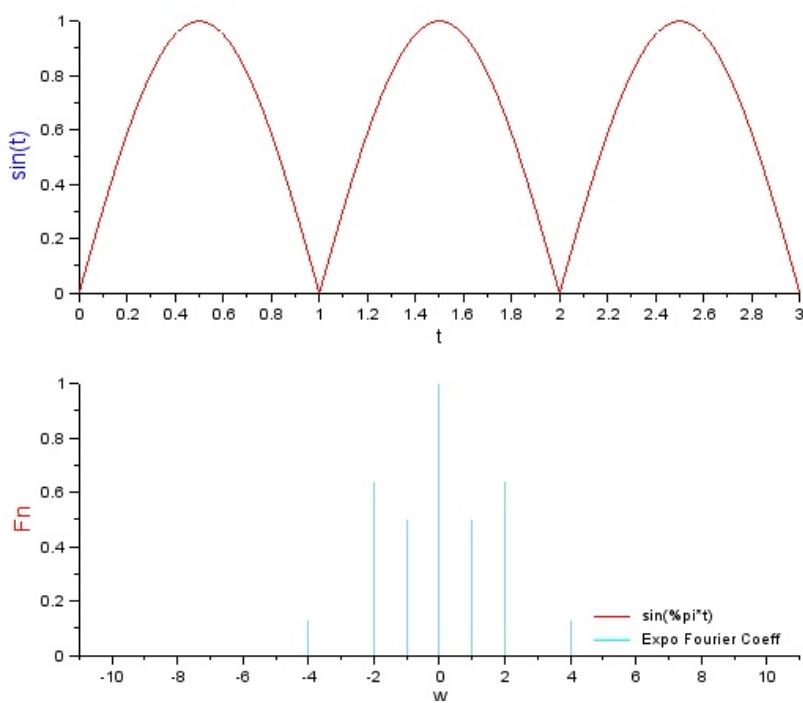


Figure 3.1: To represent a function in exponential Fourier series

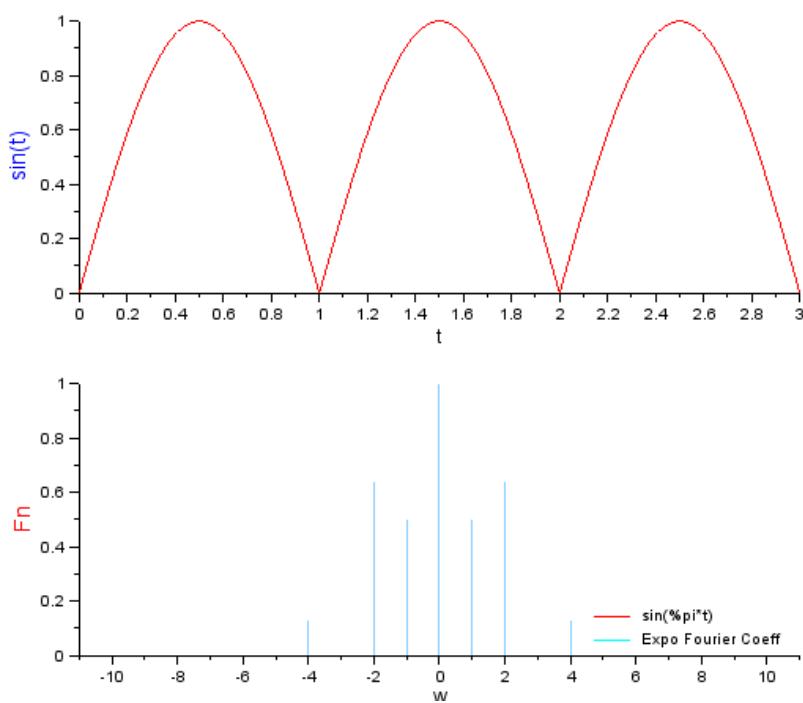


Figure 3.2: To represent a function in exponential Fourier series

```

13 for n=-5:5
14     fr=f.*cos(%pi*n*t/T)
15     Fr(a)=inttrap(t,fr)
16     fi=f.*sin(%pi*n*t/T)
17     Fi(a)=inttrap(t,fi)
18
19     mag(a)=abs(Fr(a)+%i*Fi(a))
20
21     disp(Fr(a)-(%i*Fi(a)))
22     x(1 ,size(t,2))=0
23     x=x+((Fr(a))-%i*Fi(a)).*(cos(%pi*n*t/T)+%i*sin(
24         %pi*n*t/T))
25     a=a+1
26 end
27 mprintf('The given function in Expo Fourier series
can be represented as \n')
28 n=-5:5
29 subplot(2,1,1),plot2d(t,f,style=5)// Rectified sine
function Plot
30 xlabel("t", "fontsize", 2);
31 ylabel("sin(t)", "fontsize", 3, "color", "blue");
32 subplot(2,1,2),plot2d3(n,mag,12,rect=[-11,0,11,1],
33 style=4)//Plot of the magnitude of the Fourier
coeff
34 xlabel("w", "fontsize", 2);
35 ylabel("Fn", "fontsize", 3, "color", "red");
36 legends(["sin(%pi*t)";"Expo Fourier Coeff"],[5,4],
with_box=%f, opt="lr" )

```

---

## Experiment: 4

To plot continuous time fourier transform of a continuous time signal

**Scilab code Solution 4.1** To plot continuous time fourier transform of a continuous time signal

```
1 //To plot continuous time fourier transform of a
   continuous time signal
2 //scilab 5.4.1;64 bit(windows 8)
3 clc;
4 clear;
5 A=1; // Amplitude
6 Dt=0.005;
7 t1=-4.5:Dt:4.5;
8 xt1=exp(-A*abs(t1));
9 // Continuous time Fourier Transform
10 Wmax1 =2*pi*1; // Analog Frequency = 1Hz
11 K=4;
```

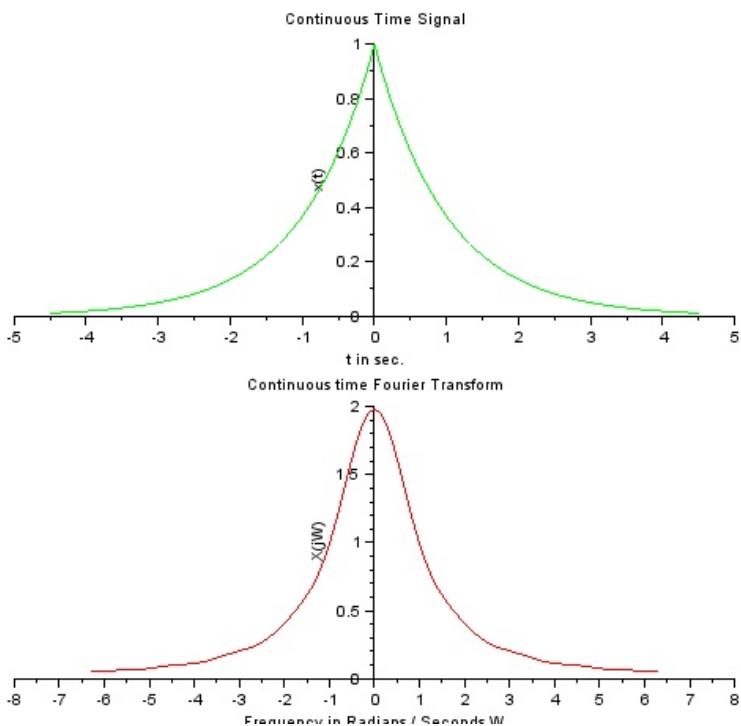


Figure 4.1: To plot continuous time fourier transorm of a continuous time signal

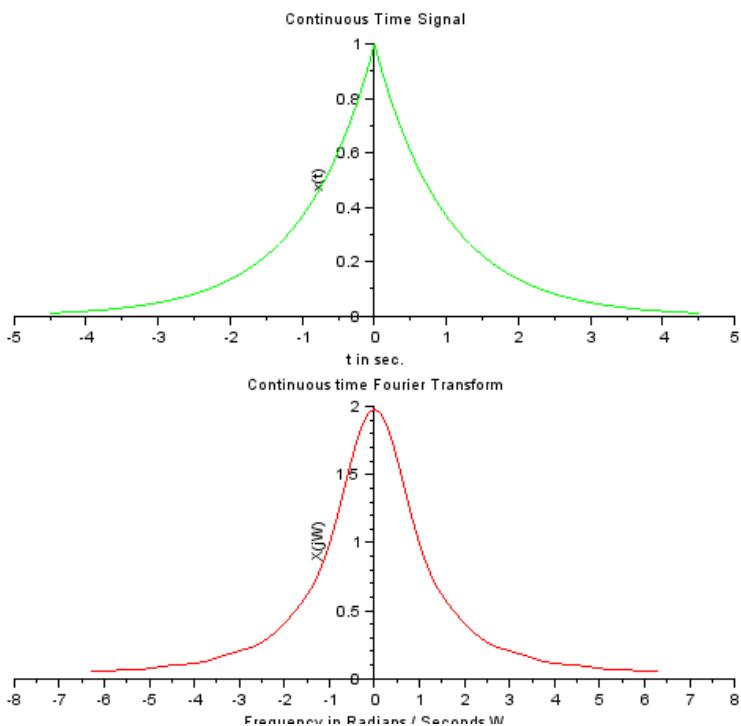


Figure 4.2: To plot continuous time fourier transorm of a continuous time signal

```

12 k=0:(K/1000):K;
13 W1=k*Wmax1/K;
14 XW1=xt1*exp(-sqrt(-1)*t1'*W1)*Dt;
15 XW1=real(XW1);
16 W1=[-mtlb_fliplr(W1), W1(2:1001)]; // Omega from -
    Wmax to Wmax
17 XW1=[ mtlb_fliplr(XW1), XW1(2:1001) ];
18 subplot(2 ,1 ,1);
19 b=gca();
20 b.y_location = "origin";
21 plot2d(t1,xt1,3);
22 xlabel('t in sec.');
23 ylabel('x(t)')
24 title(' Continuous Time Signal')
25 subplot(2 ,1 ,2);
26 b =gca();
27 b.y_location = "origin";
28 plot2d(W1,XW1,5);
29 xlabel('Frequency in Radians / Seconds W');
30 ylabel('X(jW)')
31 title('Continuous time Fourier Transform ')
32 fprintf(' |F(w)|= 2*a/sqrt(a^2+w^2) and\n Theta(w)=0',
)

```

---

## Experiment: 5

To plot continuous time fourier transform of a constant

**Scilab code Solution 5.1** To plot continuous time fourier transform of a constant

```
1 //To plot continuous time fourier transform of a
   constant
2 //scilab 5.4.1;64 bit(windows 8)
3 clc
4 clear ;
5 close ;
6 // CTS Signal
7 A=2; // Amplitude
8 Dt=0.01;
9 T1=49.5; //Time in seconds
10 t=-T1/2: Dt:T1 /2;
11 for i=1:length(t)
12 xt(i)= A;
13 end
```

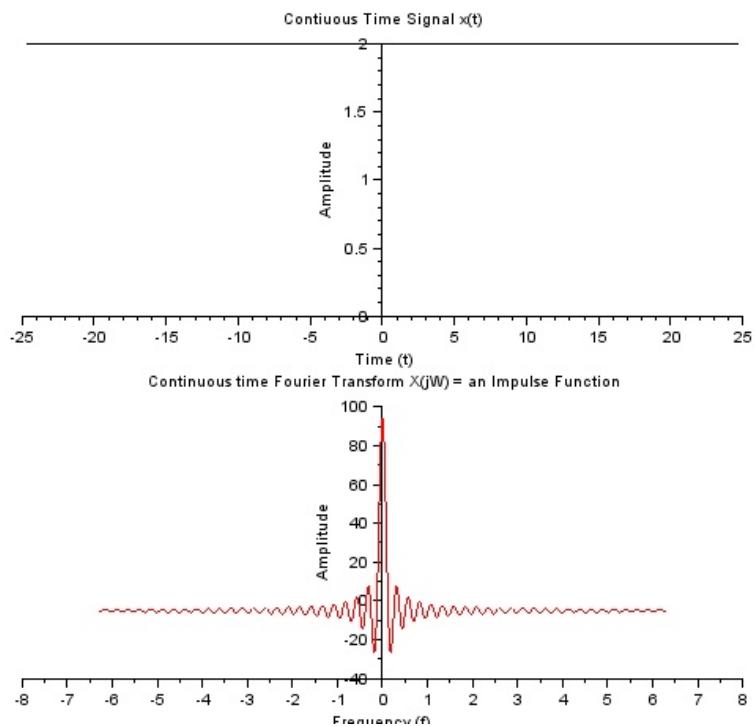


Figure 5.1: To plot continuous time fourier transform of a constant

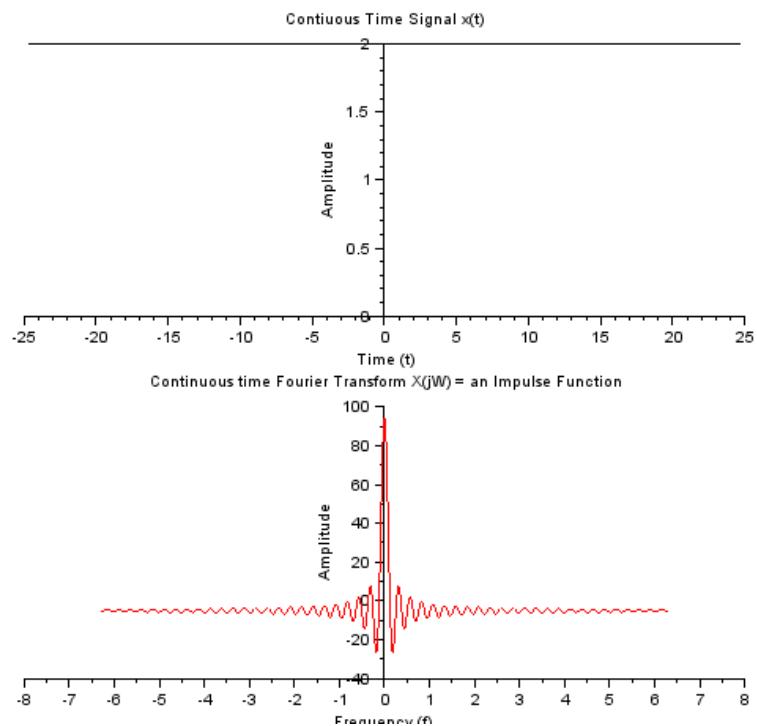


Figure 5.2: To plot continuous time fourier transform of a constant

```

14 // Continuous time Fourier Transform
15 Wmax=2*pi*1; // Analog Frequency = 1Hz
16 K =4;
17 k=0:(K/1000):K;
18 W=k*Wmax/K;
19 xt=xt';
20 XW =(xt*exp(-sqrt(-1)*t'*W)*Dt)-5;
21 XW_Mag =real(XW);
22 W =[-mtlb_fliplr(W), W(2:1001)]; // Omega from -Wmax
   to Wmax
23 XW_Mag =[mtlb_fliplr( XW_Mag ), XW_Mag(2:1001)];
24 subplot(2 ,1 ,1);
25 a =gca();
26 a.data_bounds =[ -4 ,0;4 ,2];
27 a.y_location ="origin";
28 plot2d(t,xt);
29 xlabel('Time ( t )');
30 ylabel('Amplitude')
31 title(' Contiuous Time Signal x( t ) ')
32 subplot(2 ,1 ,2);
33 a=gca();
34 a.y_location ="origin";
35 plot2d(W,XW_Mag,5);
36 xlabel('Frequency ( f )');
37 ylabel('Amplitude')
38 title('Continuous time Fourier Transform X(jW) = an
   Impulse Function')
39 fprintf('|F(w)|= 2*pi*A*delta(w), Hence the Fourier
   Transform of constant is an Impulse Function')

```

---