

Scilab Manual for
Radiation Pattern Measurement of Array
Antennas
by Dr V. A. Sankar Ponnappalli
Electronics and Telecommunication
Engineering
Sreyas Institute Of Engineering And
Technology¹

Solutions provided by
Dr V. A. Sankar Ponnappalli
Electronics and Telecommunication Engineering
Sreyas Institute Of Engineering And Technology

November 14, 2024

¹Funded by a grant from the National Mission on Education through ICT, <http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website <http://scilab.in>

Contents

| | |
|--|----|
| List of Scilab Solutions | 3 |
| 1 Radiation Pattern Measurement of Circular Array Antenna | 5 |
| 2 Radiation Pattern Measurement of Concentric Circular Array Antenna | 8 |
| 3 Radiation Pattern Measurement of Square Array Antenna | 11 |
| 4 Radiation Pattern Measurement of Hexagonal Array Antenna | 14 |

List of Experiments

| | | |
|--------------|--|----|
| Solution 1.0 | Radiation Pattern Measurement of Circular Array Antenna | 5 |
| Solution 2.0 | Radiation Pattern Measurement of Concentric Circular Array Antenna | 8 |
| Solution 3.0 | Radiation Pattern Measurement of Square Array Antenna | 11 |
| Solution 4.0 | Radiation Pattern Measurement of Hexagonal Array Antenna | 14 |

List of Figures

| | | |
|-----|--|----|
| 1.1 | Radiation Pattern Measurement of Circular Array Antenna . | 7 |
| 2.1 | Radiation Pattern Measurement of Concentric Circular Array Antenna | 10 |
| 3.1 | Radiation Pattern Measurement of Square Array Antenna . | 13 |
| 4.1 | Radiation Pattern Measurement of Hexagonal Array Antenna | 16 |

Experiment: 1

Radiation Pattern Measurement of Circular Array Antenna

Scilab code Solution 1.0 Radiation Pattern Measurement of Circular Array Antenna

```
1 // 1.RADIATION PATTERN OF CIRCULAR ARRAY ANTENNA (
    RECTANGULAR PLOT)
2 //OS-Windows 7
3 //Scilab 6.0.2
4 // RADIATION PATTERN MEASUREMENT OF ANTENNA ARRAYS
5 //Course Instructor Name: Dr. V. A. Sankar
    Ponnappalli
6 //Institute Name: Sreyas Institute of Engineering &
    Technology
7 clc;
8 clear;
9 close;
10 r=input('RADIUS='); // IN WAVELENGTHS
11 N=input('NUMBER OF ANTENNA ELEMENTS=')
12 af=0;
13 thio=0; //STEERING ANGLE
```

```

14 phio=0; // STEERING ANGLE
15 phi=%pi/2;
16 thi=-%pi:%pi/10000:%pi;
17 k=2*%pi
18     for n=1:N // NUMBER OF ANTENNA ELEMENTS
19         phin=(n-1).*(2.*%pi/N)
20         a=(exp(%i.*k.*r.*((sin(thi)*cos(phi-phin))
21             -(sin(thio)*cos(phio-phin)))));
22         af=a+af;
23     end
24 af1=abs(af);
25 af1=af1/max(max((af1)));
26 CAA=20.*log10(af1);
27 plot((thi*57.3),(CAA));
28 xlabel('THETA');
29 ylabel('ARRAY FACTOR (dB)');
30 title('RADIATION PATTERN OF CIRCULAR ARRAY ANTENNA')
31 ;
32 h=gca();
33 h.data_bounds=[-90,-80;90,0];
34 // INPUT PARAMETERS
35 //RADIUS=0.5
36 //NUMBER OF ANTENNA ELEMENTS=10
37 // DESCRIPTION OF THE FIGURE:
38 // *****ARRAY FACTOR PROPERTIES
39 // *****
40 //                                     Half Power Beam Width
41 // (HPBW): 41.8 (In degrees)
42 //                                     Side Lobe Level (SLL)
43 //                                     : -10 dB
44 //                                     Side Lobe Level Angle
45 // (SLLA): 92.2 (In degrees)

```

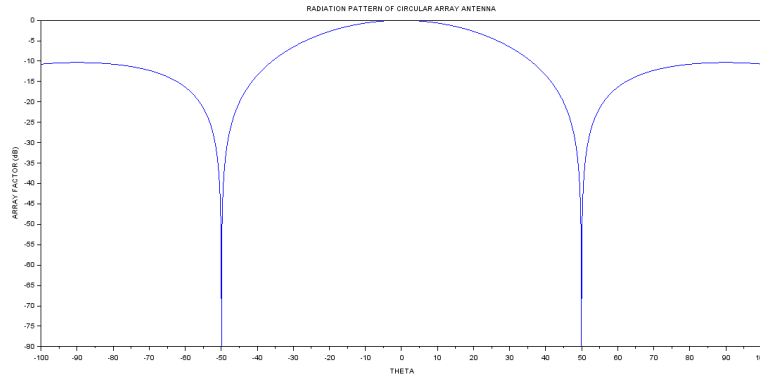


Figure 1.1: Radiation Pattern Measurement of Circular Array Antenna

Experiment: 2

Radiation Pattern Measurement of Concentric Circular Array Antenna

Scilab code Solution 2.0 Radiation Pattern Measurement of Concentric
Circular Array Antenna

```
1 //2.RADIATION PATTERN OF CONCENTRIC CIRCULAR ARRAY
   ANTENNA (RECTANGULAR PLOT)
2 //OS-Windows 7
3 //Scilab 6.0.2
4 // RADIATION PATTERN MEASUREMENT OF ANTENNA ARRAYS
5 //Course Instructor Name: Dr. V. A. Sankar
   Ponnapalli
6 //Institute Name: Sreyas Institute of Engineering &
   Technology
7 clc;
8 clear;
9 close;
10 //r=input('radius=');// IN WAVELENGTHS
11 N=input('NUMBER OF ANTENNA ELEMENTS=')
12 M=input('NUMBER OF CONCENTRIC RINGS=')
13 r=[0.5,1,1.5]; // Radius
```

```

14 af=0; // af-Array Factor
15 thio=0; //STEERING ANGLE
16 phio=0; // STEERING ANGLE
17 phi=%pi/2; // Elevation Angle
18 thi=-%pi:%pi/10000:%pi; // Azimuthal Angle
19 k=2*%pi // Wave Number
20 for m=1:M // NUMBER OF CONCENTRIC RINGS
21     for n=1:N // NUMBER OF ANTENNA ELEMENTS
22         phimn=(n-1).*(2.*%pi/N) // Antenna Element
                Position
23         a=(exp(%i.*k.*r(m).*(((sin(thi)*cos(phi-
                phimn)))-(sin(thio)*cos(phio-phimn)))));
24         af=a+af;
25     end
26 end
27 af1=abs(af); // af1- Array Factor
28 af1=af1/max(max((af1)));
29 CCAA=20.*log10(af1); // CCAA-CONCENTRIC CIRCULAR
                ARRAY ANTENNA
30 plot((thi*57.3),(CCAA));
31 xlabel('THETA');
32 ylabel('ARRAY FACTOR (dB)');
33 title('RADIATION PATTERN OF CIRCULAR ARRAY ANTENNA')
    ;
34 h=gca();
35 h.data_bounds=[-90,-80;90,0];
36
37 // INPUT PARAMETERS
38
39 //NUMBER OF ANTENNA ELEMENTS=10
40
41 //NUMBER OF CONCENTRIC RINGS=3
42
43 // DESCRIPTION OF THE FIGURE:
44 //*****ARRAY FACTOR PROPERTIES
                *****
45 //                               Half Power Beam Width
                (HPBW): 19.2 (In degrees)

```

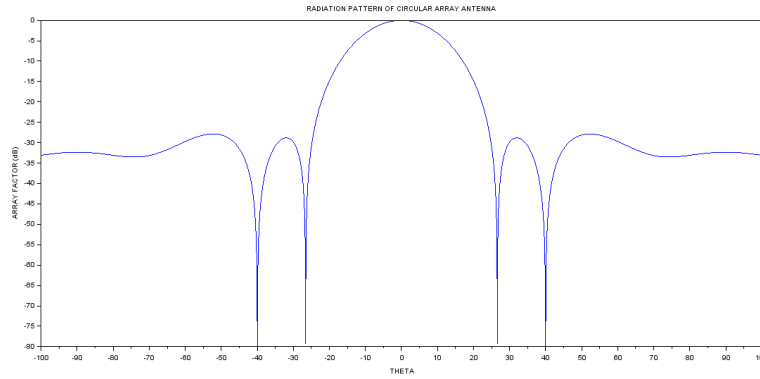


Figure 2.1: Radiation Pattern Measurement of Concentric Circular Array Antenna

46 // Side Lobe Level (SLL)
: -28.8 dB

47 // Side Lobe Level Angle
(SLLA): 31.9 (In degrees)

Experiment: 3

Radiation Pattern Measurement of Square Array Antenna

Scilab code Solution 3.0 Radiation Pattern Measurement of Square Array Antenna

```
1 // 3.RADIATION PATTERN OF SQUARE ARRAY ANTENNA FOR
   FOUR ELEMENTS (RECTANGULAR PLOT)
2 //OS-Windows 7
3 //Scilab 6.0.2
4 // Antenna Arrays
5 //Course Instructor Name: Dr. V. A. Sankar
   Ponnapalli
6 //Institute Name: Sreyas Institute of Engineering &
   Technology
7 clc;
8 clear;
9 close;
10 af=0; // af-Array Factor
11 thio=0; //STEERING ANGLE
12 phio=0; // STEERING ANGLE
13 phi=%pi/2; // Elevation Angle
```

```

14 thi=-%pi:%pi/10000:%pi; // Azimuthal Angle
15 r=0.5//Radius
16 k=2*%pi // Wave Number
17     for n=1:4 // NUMBER OF ANTENNA ELEMENTS
18         phin=(n-1).*(2.*%pi/4) // Antenna Element
           Position
19         a=(exp(%i.*k.*r.*(((sin(thi)*cos(phi-phin))
           -(sin(thio)*cos(phio-phin))))));
20         af=a+af;
21     end
22 af1=abs(af); //af1- Array Factor
23 af1=af1/max(max((af1)));
24 SAA=20.*log10(af1); // SAA-SQUARE ARRAY ANTENNA
25 plot((thi*57.3),(SAA));
26 xlabel('THETA');
27 ylabel('ARRAY FACTOR (dB)');
28 title('RADIATION PATTERN OF SQUARE ARRAY ANTENNA');
29 //h=gca();
30 //h.data_bounds=[-90,-80;90,0];
31
32 // DESCRIPTION OF THE FIGURE:
33 // *****ARRAY FACTOR PROPERTIES
           *****
34 //                                     Half Power Beam Width
           (HPBW): 43.4 (In degrees)
35 //                                     Side Lobe Level (SLL)
           : -0.47 dB
36 //                                     Side Lobe Level Angle
           (SLLA): 171.1 (In degrees)

```

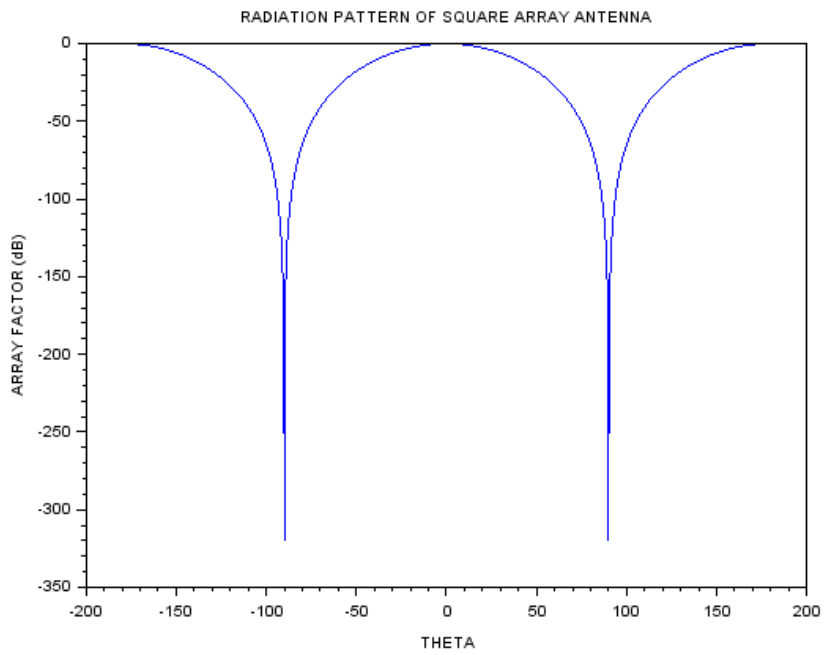


Figure 3.1: Radiation Pattern Measurement of Square Array Antenna

Experiment: 4

Radiation Pattern Measurement of Hexagonal Array Antenna

Scilab code Solution 4.0 Radiation Pattern Measurement of Hexagonal Array Antenna

```
1 // 4.RADIATION PATTERN OF HEXAGONAL ARRAY ANTENNA (
    RECTANGULAR PLOT)
2 //OS-Windows 7
3 //Scilab 6.0.2
4 // Antenna Arrays
5 //Course Instructor Name: Dr. V. A. Sankar
    Ponnapalli
6 //Institute Name: Sreyas Institute of Engineering &
    Technology
7 clc;
8 clear;
9 close;
10 af=0; //af- Array Factor
11 thio=0; //STEERING ANGLE
12 phio=0; // STEERING ANGLE
13 phi=%pi/2; // Elevation Angle
```

```

14 thi=-%pi:%pi/10000:%pi; // Azimuthal Angle
15 r=0.5//Radius
16 k=2*%pi // Wave Number
17     for n=1:6 // NUMBER OF ANTENNA ELEMENTS
18         phin=(n-1).*(2.*%pi/6) // Antenna Element
           Position
19         a=(exp(%i.*k.*r.*(((sin(thi)*cos(phi-phin))
           -(sin(thio)*cos(phio-phin))))));
20         af=a+af;
21     end
22 af1=abs(af); // af1-Array Factor
23 af1=af1/max(max((af1)));
24 HAA=20.*log10(af1); // HEXAGONAL ARRAY ANTENNA
25 plot((thi*57.3),(HAA));
26 xlabel('THETA');
27 ylabel('ARRAY FACTOR (dB)')
28 title('RADIATION PATTERN OF HEXAGONAL ARRAY ANTENNA'
       ');
29 h=gca();
30 h.data_bounds=[-90,-80;90,0];
31
32 // DESCRIPTION OF THE FIGURE:
33 // *****ARRAY FACTOR PROPERTIES
       *****
34 //                                     Half Power Beam Width
       (HPBW): 41.8 (In degrees)
35 //                                     Side Lobe Level (SLL)
       : -11.2 dB
36 //                                     Side Lobe Level Angle
       (SLLA): 94.1 (In degrees)

```

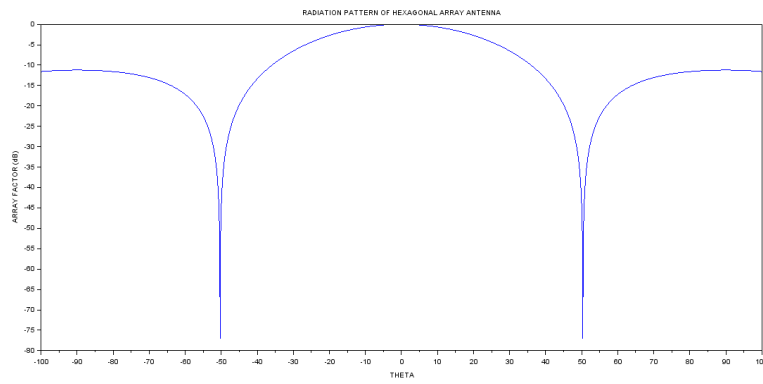


Figure 4.1: Radiation Pattern Measurement of Hexagonal Array Antenna