

Scilab Manual for  
Advanced Control Systems  
by Prof Deepti Khimani  
Instrumentation Engineering  
VESIT<sup>1</sup>

Solutions provided by  
Prof Mrs. Deepti Khimani  
Instrumentation Engineering  
Mumbai University/V. E. S. Institute of Technology

May 15, 2026

<sup>1</sup>Funded by a grant from the National Mission on Education through ICT, <http://spoken-tutorial.org/NMEICT-Intro>. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website <http://scilab.in>



# Contents

List of Scilab Solutions	4
1 To plot the phase portrait of systems having stable and unstable nodes.	6
2 To plot the phase portrait of systems having stable and unstable focus.	11
3 To plot the phase portrait of systems having vortex point.	15
4 To plot the phase portrait of systems having saddle point.	19
5 To demonstrate limit cycles for vander pol's equation.	23
6 To demonstrate the effect of the static nonlinearities.	25
7 To demonstrate the stability of the system using Describing function.	27
8 To demonstrate the stability of the system using Lyapunov equation.	30
9 Stabilization of double integrator system using variable structure control.	32
10 Design the exact feedback linearizing controller for the non linear system.	34
11 To design sliding mode controller for a linear system.	36

12 To demonstrate model reference adaptive control system. 38

# List of Experiments

Solution 1.01	Lab01	.....	6
Solution 2.1	Lab02	.....	11
Solution 3.01	Lab03	.....	15
Solution 4.01	Lab04	.....	19
Solution 7.01	Lab07	.....	27
Solution 8.01	Lab08	.....	30

# List of Figures

1.1	Lab01	.....	9
1.2	Lab01	.....	10
2.1	Lab02	.....	14
2.2	Lab02	.....	14
3.1	Lab03	.....	17
3.2	Lab03	.....	18
4.1	Lab04	.....	21
4.2	Lab04	.....	22
5.1	Lab05	.....	24
6.1	Lab06	.....	26
6.2	Lab06	.....	26
7.1	Lab07	.....	29
9.1	Lab09	.....	33
10.1	Lab10	.....	35
11.1	Lab11	.....	37
11.2	Lab11	.....	37
12.1	Lab12	.....	39

# Experiment: 1

To plot the phase portrait of systems having stable and unstable nodes.

Scilab code Solution 1.01 Lab01

```
1 //Lab. 01: To plot the phase portrait of systems
   having stable and unstable nodes.
2
3 //scilab - 5.5.0
4 // Operating System : Windows 7, 32-bit
5
6 clc;
7 clear all;
8 clf;
9
10 //System transfer function
11 s=poly(0, 's');
12 g=1/(s^2+3*s+2);
13
14 //Draw pole zero map of the system
15 plzr(g);
16 title('Pole-zero map of the system with real stable
```

```

    eigen values ', 'fontsize',3)
17 //Convert the given transfer function into state
    space form
18 sys=tf2ss(g);
19
20 //Plot of system phase trajectory
21 sys.c=[1,0;0,1];
22 sys.d=[0 0]';
23
24 t=0:0.2:10;
25 a1=size(t);
26 u=zeros(a1(1),a1(2));
27 figure
28 for i=-2.0:0.5:2;
29     for j=-2:0.5:2;
30         y1=csim(u,t,sys,[i,j]');
31         plot(y1(1,:),y1(2,:));
32     end
33 end
34
35 set(gca(),"grid",[0.3 0.3])
36 title('Phase portrait of the system with stable node
    ', 'fontsize',3)
37 xlabel('x1(t)', 'fontsize',2)
38 ylabel('x2(t)', 'fontsize',2)
39 f=get("current_figure") //Current figure handle
40 f.background=8
41 //System transfer function
42 s=poly(0,'s');
43 g=1/(s^2-3*s+2);
44
45 // Draw pole zero map of the system
46 figure;
47 plzr(g);
48 title('Pole-zero map of the system with real
    unstable eigen values ', 'fontsize',3)
49 f=get("current_figure") //Current figure handle
50 f.background=8

```

```

51 //Convert the given transfer function into state
    space form
52 sys=tf2ss(g);
53
54 //Plot of system phase trajectory
55 sys.c=[1,0;0,1];
56 sys.d=[0 0]';
57
58 a1=size(t);
59 u=zeros(a1(1),a1(2));
60 figure
61 for i=-2.0:0.5:2;
62     for j=-2:0.5:2;
63         y1=csim(u,t,sys,[i,j]');
64         plot(y1(1,:),y1(2,:));
65     end
66 end
67 set(gca(),"grid",[0.3 0.3])
68 f=get("current_figure") //Current figure handle
69 f.background=8
70 zoom_rect([-5,-5,5,5])
71 title('Phase portrait of the system with unstable
        node','fontsize',3)
72 xlabel('x1(t)','fontsize',2)
73 ylabel('x2(t)','fontsize',2)

```

---

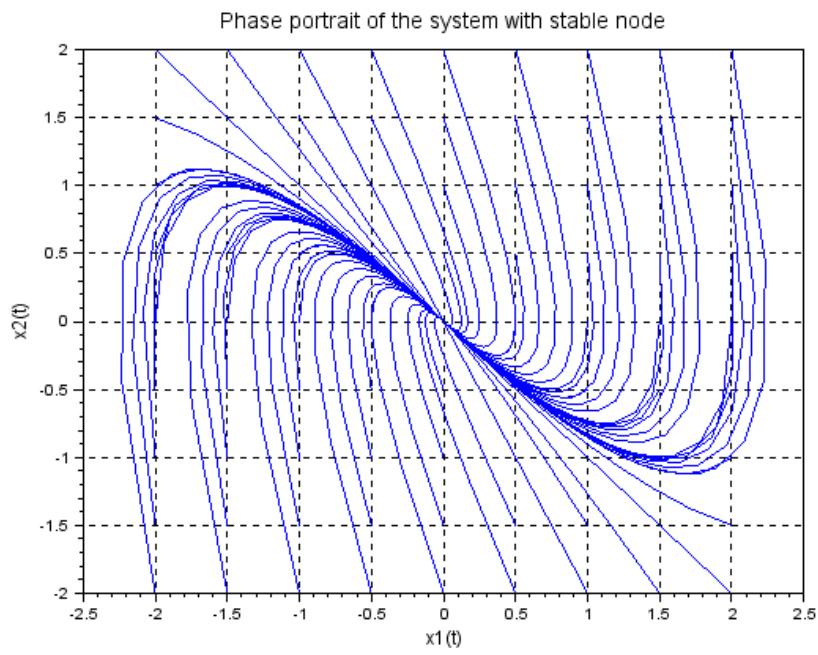


Figure 1.1: Lab01

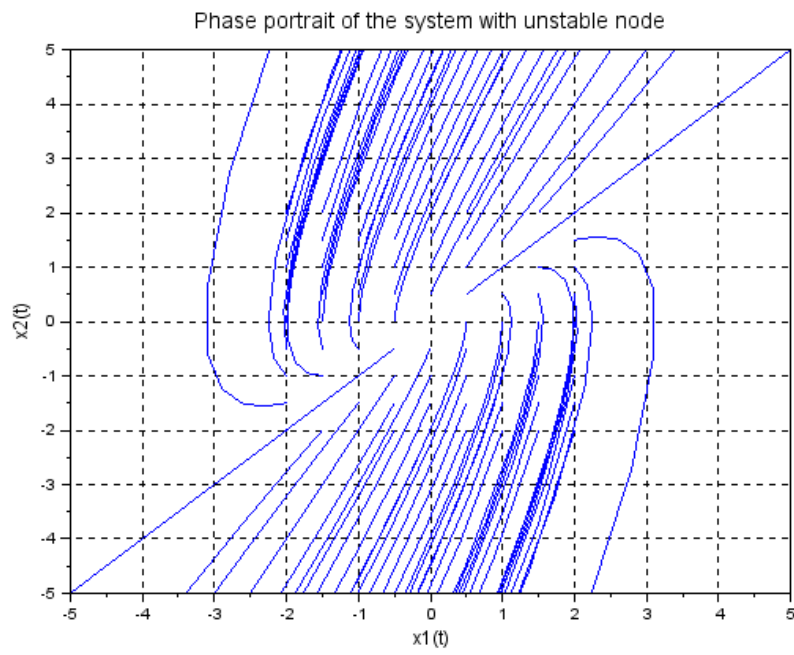


Figure 1.2: Lab01

## Experiment: 2

To plot the phase portrait of systems having stable and unstable focus.

Scilab code Solution 2.1 Lab02

```
1 //Lab. 02: To plot the phase portrait of systems
   having stable and unstable focus point.
2
3 //scilab - 5.5.0
4 // Operating System : Windows 7, 32-bit
5
6 clc;
7 clear all;
8 clf;
9
10 //System transfer function
11 s=poly(0, 's');
12 g=1/(s^2+s+1);
13
14 // Draw pole zero map of the system
15 plzr(g);
16 title('Pole-zero map of the system with stable
```

```

    underdamped eigen values ', 'fontsize', 3)
17 //Convert the given transfer function into state
    space form
18 sys=tf2ss(g);
19
20 //Plot of system phase trajectory
21 sys.c=[1,0;0,1];
22 sys.d=[0 0]';
23
24 t=0:0.2:10;
25 a1=size(t);
26 u=zeros(a1(1),a1(2));
27 figure
28 for i=-2.0:0.5:2;
29     for j=-2:0.5:2;
30 y1=csim(u,t,sys,[i,j]');
31 plot(y1(1,:),y1(2,:));
32 end
33 end
34 set(gca(),'grid',[0.3 0.3])
35 f=get("current_figure") //Current figure handle
36 f.background=8
37 title('Phase portrait of the system with stable
    focus ', 'fontsize', 3)
38 xlabel('x1(t)', 'fontsize', 2)
39 ylabel('x2(t)', 'fontsize', 2)
40
41 //System transfer function
42 s=poly(0, 's');
43 g=1/(s^2-s+1);
44
45 //Convert the given transfer function into state
    space form
46 sys=tf2ss(g);
47
48 // Draw pole zero map of the system
49 figure;
50 plzr(g);

```

```

51 f=get("current_figure") //Current figure handle
52 f.background=8
53 title('Pole-zero map of the system with negatively
        damped eigen values','fontsize',3)
54 //Plot of system phase trajectory
55 sys.c=[1,0;0,1];
56 sys.d=[0 0]';
57
58 a1=size(t);
59 u=zeros(a1(1),a1(2));
60 figure
61 for i=-2.0:0.5:2;
62     for j=-2:0.5:2;
63 y1=csim(u,t,sys,[i,j]');
64 plot(y1(1,:),y1(2,:));
65 end
66 end
67 set(gca(),"grid",[0.3 0.3])
68 f=get("current_figure") //Current figure handle
69 f.background=8
70 zoom_rect([-5,-5,5,5])
71 title('Phase portrait of the system with unstable
        focus ','fontsize',3)
72 xlabel('x1(t)','fontsize',2)
73 ylabel('x2(t)','fontsize',2)

```

---

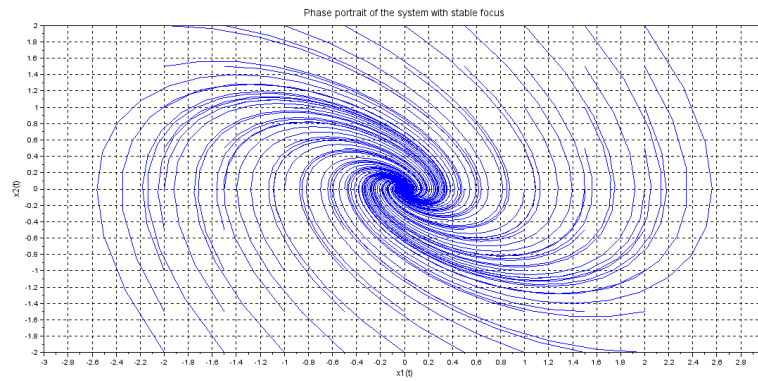


Figure 2.1: Lab02

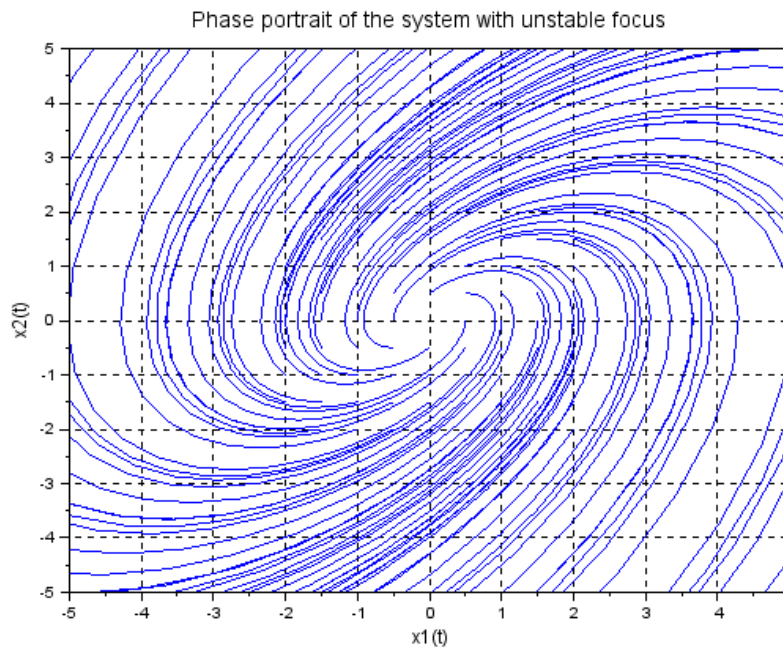


Figure 2.2: Lab02

## Experiment: 3

To plot the phase portrait of systems having vortex point.

Scilab code Solution 3.01 Lab03

```
1 //Lab. 03: To plot the phase portrait of systems
   having vortex point.
2
3 //scilab - 5.5.0
4 // Operating System : Windows 7, 32-bit
5
6 clc;
7 clear all;
8 clf;
9
10 //System transfer function
11 s=poly(0, 's');
12 g=1/(s^2+4);
13
14 // Draw pole zero map of the system
15 plzr(g);
16 title('Pole-zero map of the system with critically
   damped eigen values', 'fontsize',3)
17 //Convert the given transfer function into state
```

```

        space form
18 sys=tf2ss(g);
19
20 //Plot of system phase trajectory
21 sys.c=[1,0;0,1];
22 sys.d=[0 0]';
23
24 t=0:0.2:10;
25 a1=size(t);
26 u=zeros(a1(1),a1(2));
27 figure
28 for i=-2.0:0.5:2;
29     for j=-2:0.5:2;
30 y1=csim(u,t,sys,[i,j]');
31 plot(y1(1,:),y1(2,:));
32 end
33 end
34 set(gca(),"grid",[0.3 0.3])
35 f=get("current_figure") //Current figure handle
36 f.background=8
37 title('Phase portrait of the system with vortex
        point','fontsize',3)
38 xlabel('x1(t)','fontsize',2)
39 ylabel('x2(t)','fontsize',2)

```

---

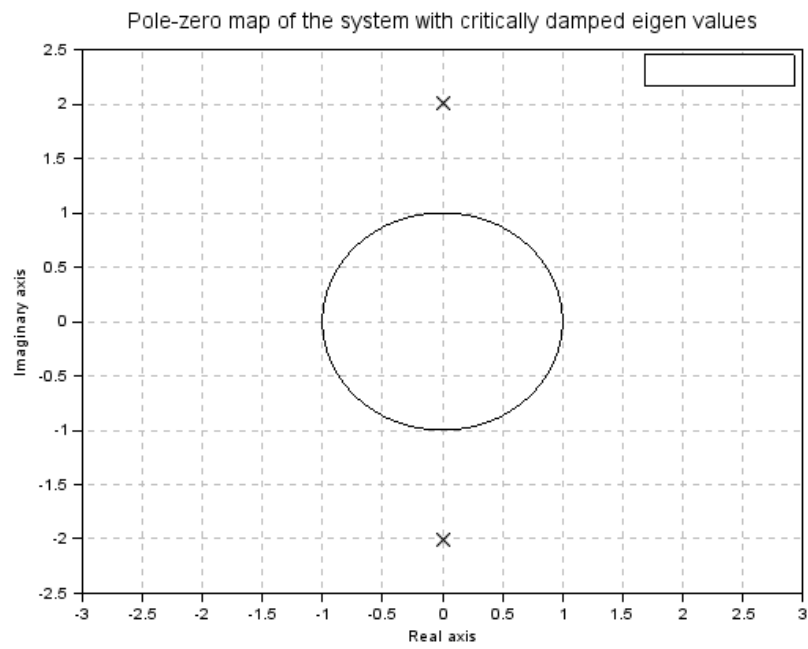


Figure 3.1: Lab03

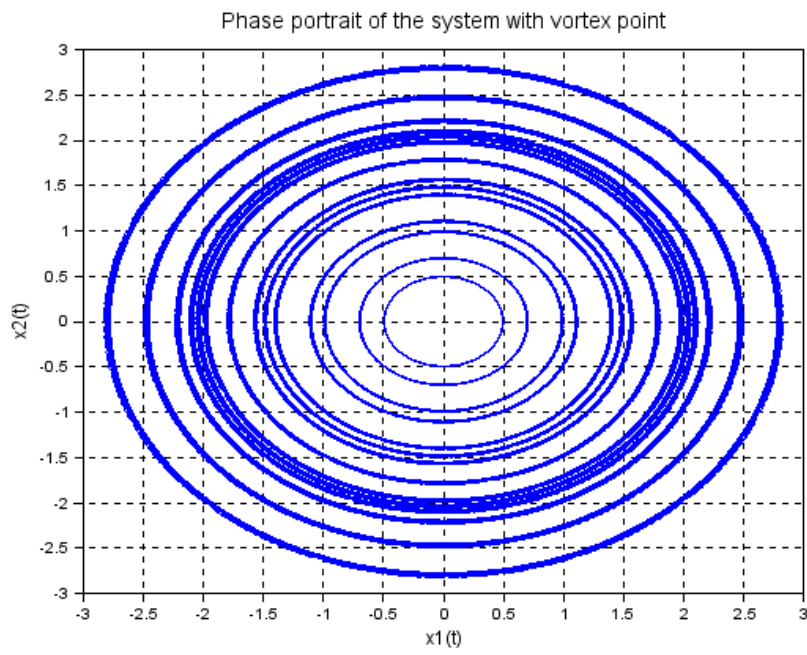


Figure 3.2: Lab03

## Experiment: 4

To plot the phase portrait of systems having saddle point.

Scilab code Solution 4.01 Lab04

```
1 //Lab. 04: To plot the Phase portrait of systems
   having saddle point.
2
3 //scilab - 5.5.0
4 // Operating System : Windows 7, 32-bit
5
6 clc;
7 clear all;
8 clf;
9
10 //System transfer function
11 s=poly(0, 's');
12 g=1/(s^2+1*s-2);
13
14 //Convert the given transfer function into state
   space form
15 sys=tf2ss(g);
16
17 // Draw pole zero map of the system
```

```

18 plzr(sys);
19 title('Pole-zero map of the system with real stable
        and unstable eigen values','fontsize',3)
20 //Plot of system phase trajectory
21 sys.c=[1,0;0,1];
22 sys.d=[0 0]';
23
24 t=0:0.2:5;
25 a1=size(t);
26 u=zeros(a1(1),a1(2));
27 figure;
28 for i=-2.0:0.5:2;
29     for j=-2:0.5:2;
30 y1=csim(u,t,sys,[i,j]');
31 plot(y1(1,:),y1(2,:));
32 end
33 end
34 set(gca(),"grid",[0.3 0.3])
35 f=get("current_figure") //Current figure handle
36 f.background=8
37 zoom_rect([-3,-3,3,3])
38 title('Phase portrait of the system with saddle
        point','fontsize',3)
39 xlabel('x1(t)','fontsize',2)
40 ylabel('x2(t)','fontsize',2)

```

---

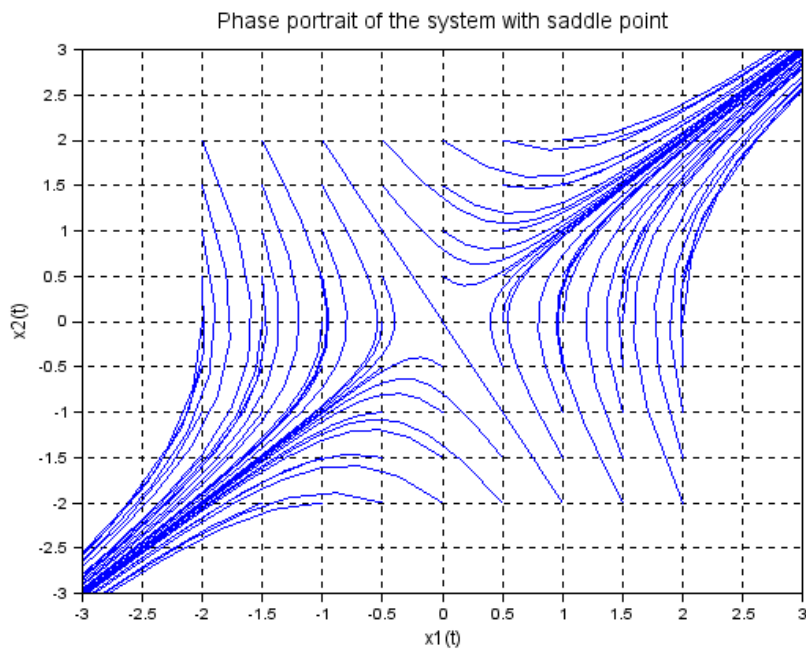


Figure 4.1: Lab04

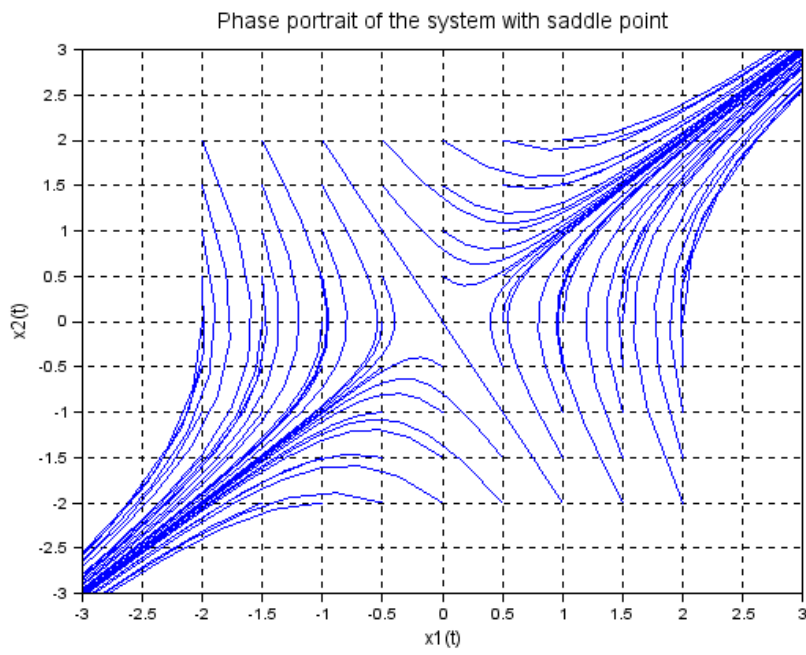


Figure 4.2: Lab04

## **Experiment: 5**

**To demonstrate limit cycles for vander pol's equation.**

This code can be downloaded from the website [www.scilab.in](http://www.scilab.in)

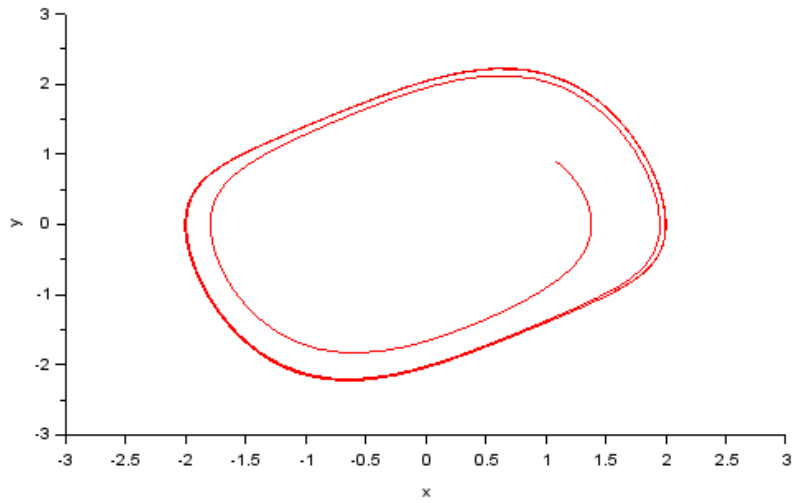


Figure 5.1: Lab05

## **Experiment: 6**

**To demonstrate the effect of  
the static nonlinearities.**

This code can be downloaded from the website [www.scilab.in](http://www.scilab.in)

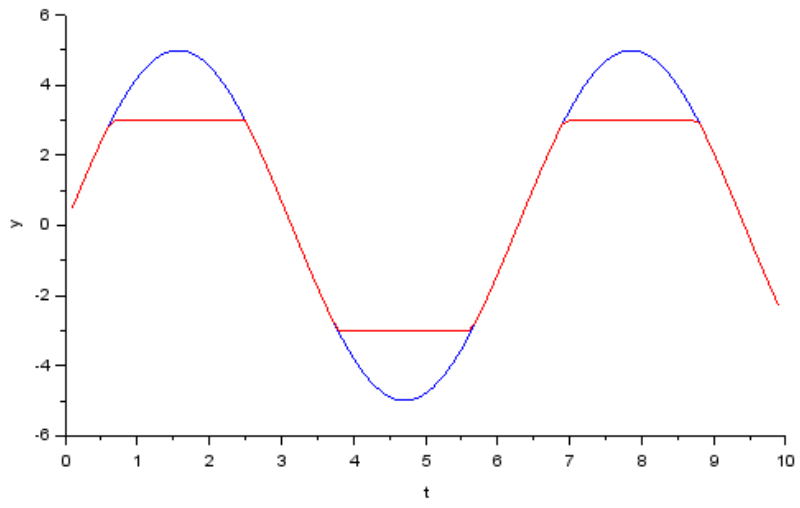


Figure 6.1: Lab06

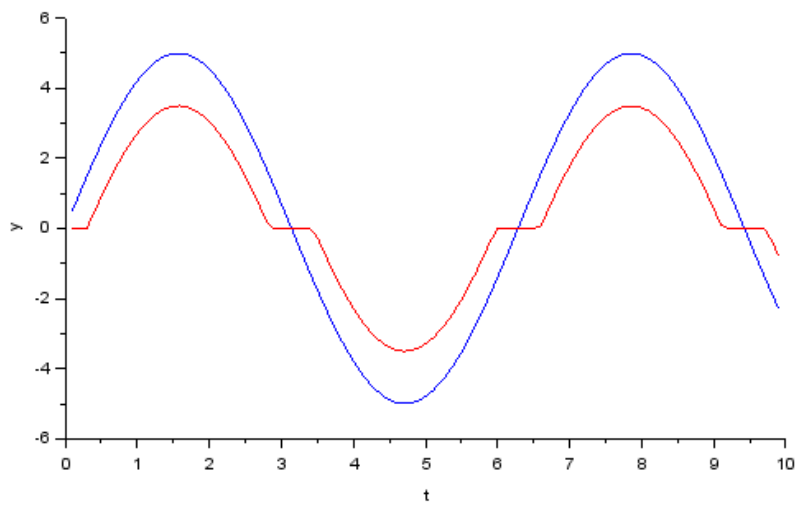


Figure 6.2: Lab06

## Experiment: 7

To demonstrate the stability of the system using Describing function.

Scilab code Solution 7.01 Lab07

```
1 //Lab. 08: To check the stability of the system
   using Describing Functions.
2
3 //scilab - 5.5.0
4 // Operating System : Windows 7, 32-bit
5
6 clc;
7 clear all;
8
9 // Frequency Bounds
10
11 wmin=1;
12 wmax=100;
13 fmin=wmin/2/%pi;
14 fmax=wmax/2/%pi;
15
16 //System Model
```

```

17
18 s=poly(0,'s');
19 g1=syslin('c',10/(0.5*s^3+1.5*s^2+s))
20
21 //Nyquist Plot
22
23 nyquist(g1,fmin,fmax)
24
25
26 // Plot of Describing Function of Relay with
    Deadzone Nonlinearity
27 x=1:0.5:10;
28 n=(2/%pi)*(asin(1 ./x)+(1 ./x) .* sqrt(1-(1 ./x)
    .^2));
29 n1=-1 ./n;
30 z=size(n1);
31 plot2d(n1,zeros(1,z(2)),2)
32
33 h=legend(['DF Contour';'System Contour'])

```

---

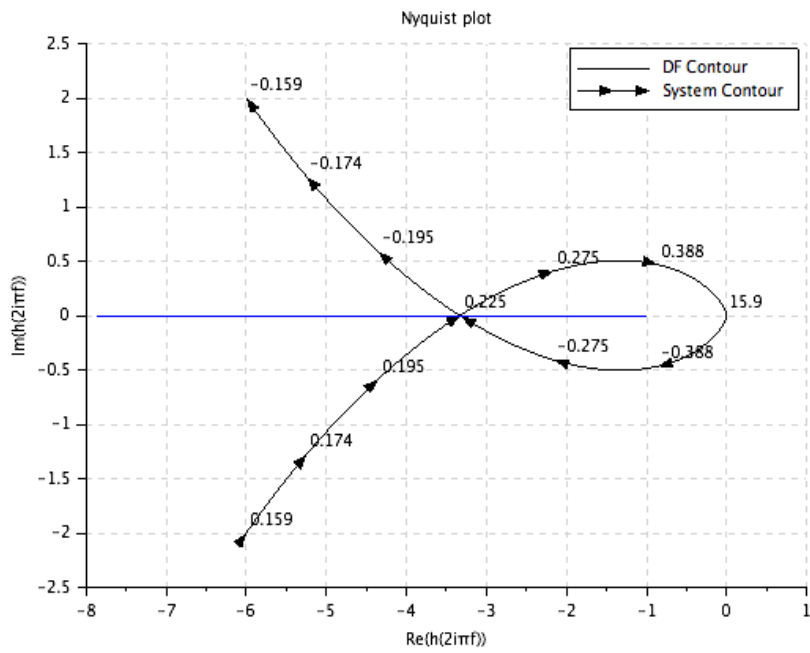


Figure 7.1: Lab07

## Experiment: 8

To demonstrate the stability of the system using Lyapunov equation.

Scilab code Solution 8.01 Lab08

```
1 //Lab. 08: To check the stability of the system
   using Lyapunov equation.
2
3 //scilab - 5.5.0
4 // Operating System : Windows 7, 32-bit
5
6 clc;
7 clear all;
8
9 //System model
10
11 a=[0 1 0;0 0 1;-2 -3 -2];
12 q=-eye(3,3);
13 p=lyap(a,q,'c');
14
15 // For a stable system matrix p should be positive
   definite for
```

```
16 //which all the principle minors or all eigen values
    of the matrix p should be positive
17 eig_val=spec(p);
18 m=length(eig_val);
19 stable=0;
20 for i=1:m;
21     if real(eig_val(i))>0 then
22         stable=stable+1;
23     end
24 end
25 if stable==m then
26     disp('The system is asymptotically stable')
27 else
28     disp('The system is unstable or critically
        stable')
29 end
```

---

## **Experiment: 9**

# **Stabilization of double integrator system using variable structure control.**

This code can be downloaded from the website [www.scilab.in](http://www.scilab.in)

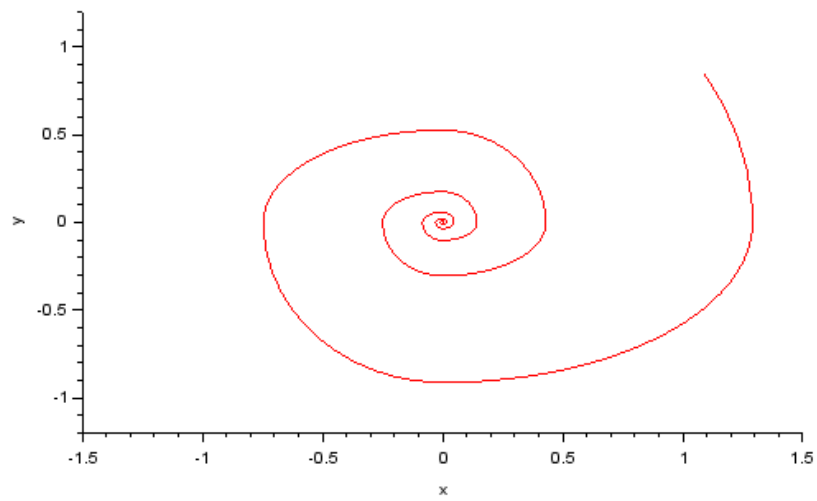


Figure 9.1: Lab09

## **Experiment: 10**

**Design the exact feedback linearizing controller for the non linear system.**

This code can be downloaded from the website [www.scilab.in](http://www.scilab.in)

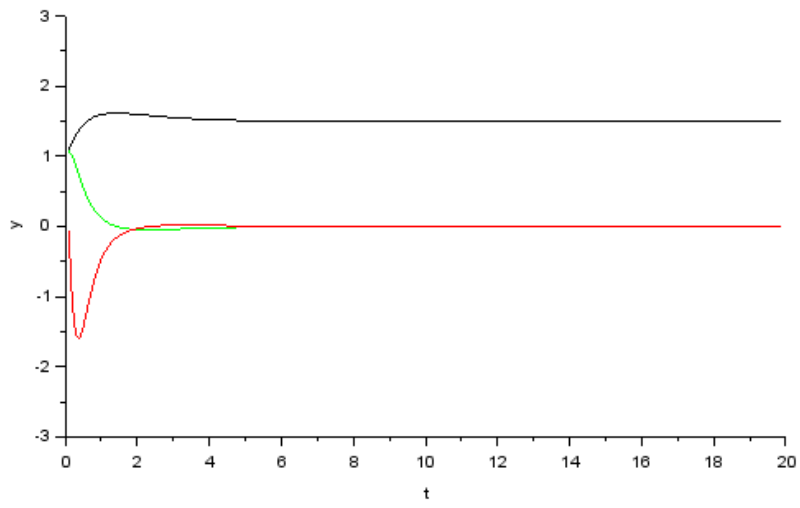


Figure 10.1: Lab10

## **Experiment: 11**

**To design sliding mode  
controller for a linear system.**

This code can be downloaded from the website [www.scilab.in](http://www.scilab.in)

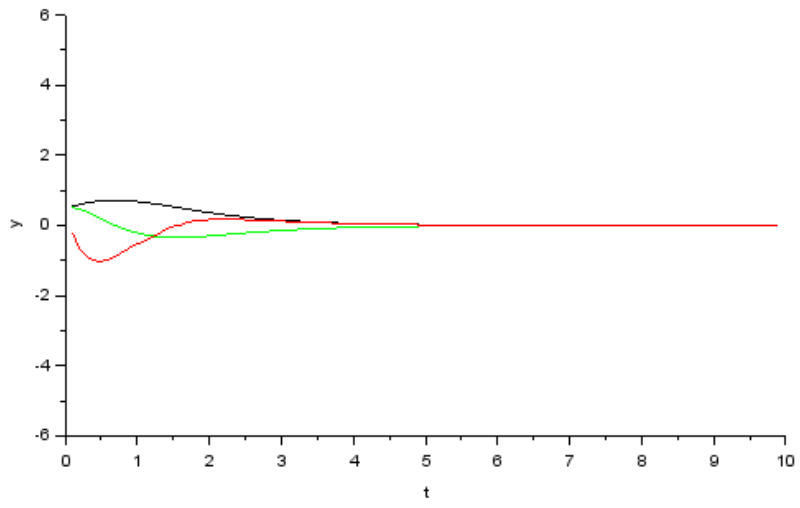


Figure 11.1: Lab11

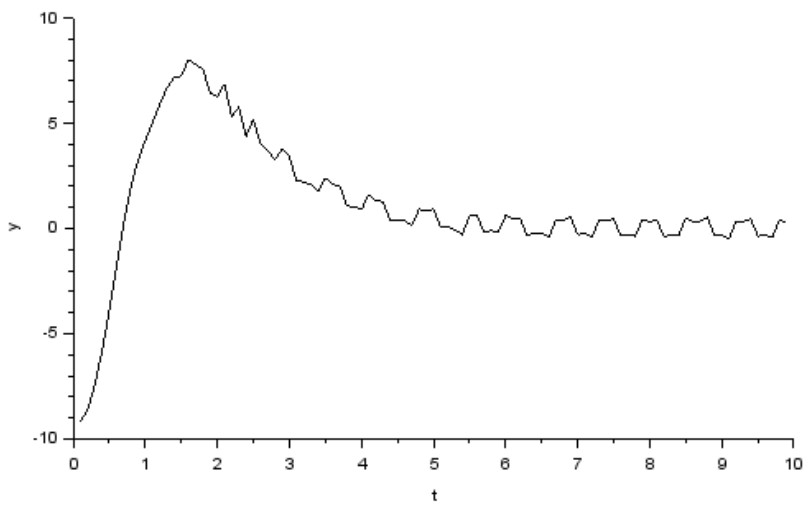


Figure 11.2: Lab11

## **Experiment: 12**

**To demonstrate model  
reference adaptive control  
system.**

This code can be downloaded from the website [www.scilab.in](http://www.scilab.in)

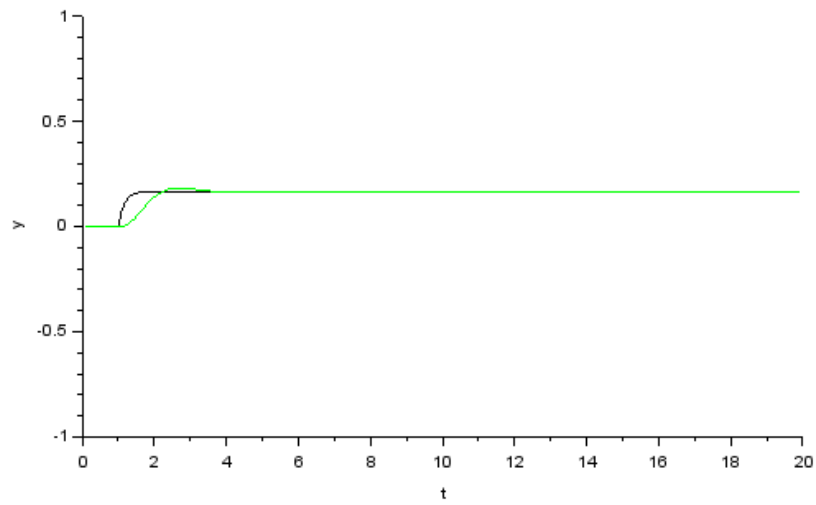


Figure 12.1: Lab12