Scilab Manual for Control and Instrumentation by Prof A. George Ansfer Electrical Engineering St. Xavier's Catholic College of Engineering[1]

Solutions provided by
Prof A.George Ansfer
Electrical Engineering
St.Xavier's Catholic College of Engineering

November 21, 2026

[1]Funded by a grant from the National Mission on Education through ICT, http://spoken-tutorial.org/NMEICT-Intro. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website http://scilab.in

Contents

List of Scilab Solutions 3

1 Digital Simulation of P, PI, PD & PID Controller 5

2 Digital Simulation of Linear System 8

3 Simulation of Control Systems 10

List of Experiments

Solution 1.1 Exp1 5
Solution 2.2 exp2 8
Solution 3.3 exp3 10
Solution 3.4 exp4 12

List of Figures

1.1 Exp1 7

2.1 exp2 9

3.1 exp3 11
3.2 exp4 13

Experiment: 1

Digital Simulation of P, PI, PD & PID Controller

Scilab code Solution 1.1 Exp1

```
1 //Digital Simulation of P, PI, PD, and PID
     controllers
2 // 1- Open Loop Program
3 num=poly([10],'s','coeff');//Numerator input
4 den=poly([20 10 1],'s','coeff');//Denominator input
5 q=syslin('c',num/den)//Ratio of the numerator to the
     denominator
6 t=0:0.05:2.5;//time interval
7 p=csim('step',t,q);
8 subplot(321)
9 plot2d(t,p);
10 xtitle(['Open Loop '],'Time(Second)', 'Amplitude' );
11
12 // 2- P Control Program
13 kp=300;
14 num=poly([kp],'s','coeff');
15 den=poly([20+kp 10 1],'s','coeff');
16 q=syslin('c',num/den)
17 t=0:0.01:2;
```

```
18 p=csim('step',t,q);
19 subplot(322)
20 plot2d(t,p);
21 xtitle(['P Control '],'Time(Second)', 'Amplitude' );
22
23 // 3      PI Control Program
24 kp=30;
25 ki=70;
26 num=poly([ki kp],'s','coeff');
27 den=poly([ki 20+kp 10 1],'s','coeff');
28 q=syslin('c',num/den)
29 t=0:0.01:2;
30 p=csim('step',t,q);
31 subplot(323)
32 plot2d(t,p);
33 xtitle(['PI Control '],'Time(Second)', 'Amplitude' )
      ;
34
35 // 4      PD Control Program
36 kp=300;
37 kd=10;
38 num=poly([kp kd],'s','coeff');
39 den=poly([20+kp 10+kd 1],'s','coeff');
40 q=syslin('c',num/den)
41 t=0:0.01:2;
42 p=csim('step',t,q);
43 subplot(324)
44 plot2d(t,p);
45 xtitle(['PD Control '],'Time(Second)', 'Amplitude' )
      ;
46
47 // 5      PID Control Program
48 kp=350;
49 kd=50;
50 ki=300;
51 num=poly([ki kp kd],'s','coeff');
52 den=poly([ki 20+kp 10+kd 1],'s','coeff');
53 q=syslin('c',num/den)
```

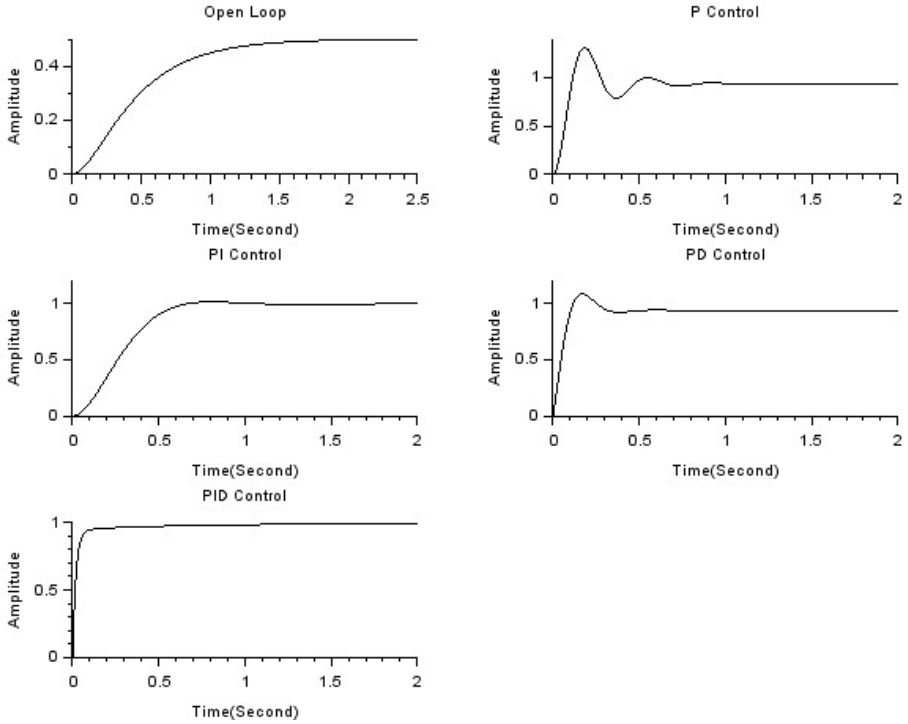


Figure 1.1: Exp1

```
54 t=0:0.01:2;
55 p=csim('step',t,q);
56 subplot(325)
57 plot2d(t,p);
58 xtitle(['PID Control '],'Time(Second)', 'Amplitude'
   );
```

Experiment: 2

Digital Simulation of Linear System

Scilab code Solution 2.2 exp2

```
1 //Second order system step response for damping
    conditions
2 t=0:0.0000001:0.0002;
3 d=[0.5 1 1.5];//Entering the damping conditions
    values
4 cv=[1 2 3];
5 s=%s;
6 for n=1:3
7 num = 10^10;
8 den = s^2 + 2*d(n)*100000*s  +10^10;
9  P = syslin('c',num,den);
10 Ps=csim('step',t,P);
11 plot2d(t,Ps,style=cv(n));
12 end;
13 xgrid(6);
14 xtitle(['Second order step response '],'Time(Second)
    ', 'Amplitude' );
15 legends(['d=0.5(underdamped)';'d=1(critically damped
    )';'d=1.5(overdamped)'],[1,2,3],opt=4);
```

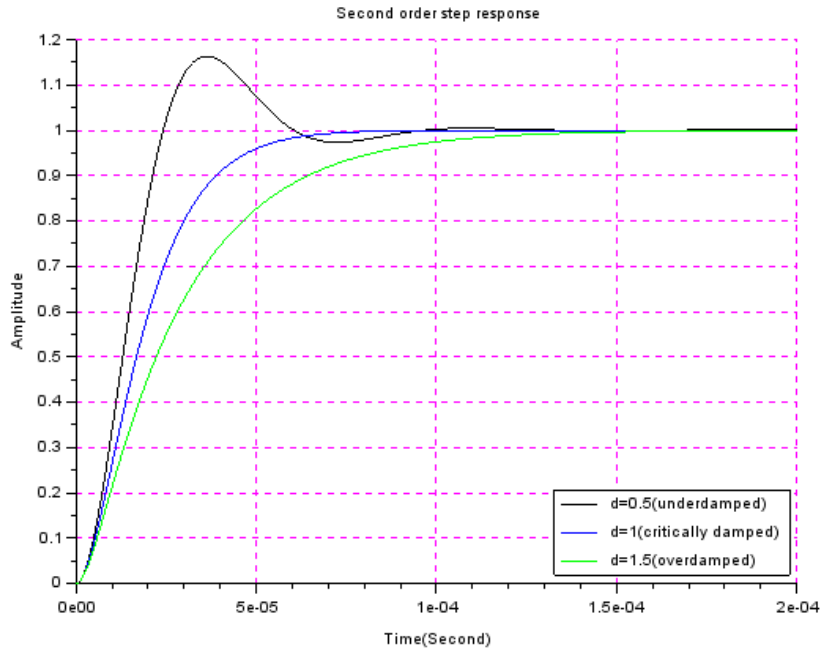


Figure 2.1: exp2

Experiment: 3

Simulation of Control Systems

Scilab code Solution 3.3 exp3

```
1  // Effects on Stability.
2  // G(s) = a^2 / s(s+2b a) , H(s) = C , T(s) = C a^2
       / ( s(s+2b a) + C a^2 )
3  s=%s;
4  t=0:0.01:10;
5  a=1;b=1;
6  C=[1,2,5,10]
7  for n=1:4
8      T=syslin('c', C(n)*a^2 , s*(s + 2*b*a) + C(n)*a
          ^2 );
9      Ts=csim('step',t,T);
10     xset("line style",n);
11     plot2d(t,Ts);
12     xgrid(5);
13 end
14 xtitle('Effects on Stability .','Time(sec)','C(t)');
15 legends(['C=1';'C=2';'C=5';'C=10'
      ;],[[1;1],[1;2],[1;3],[1;4]], opt=4);
```

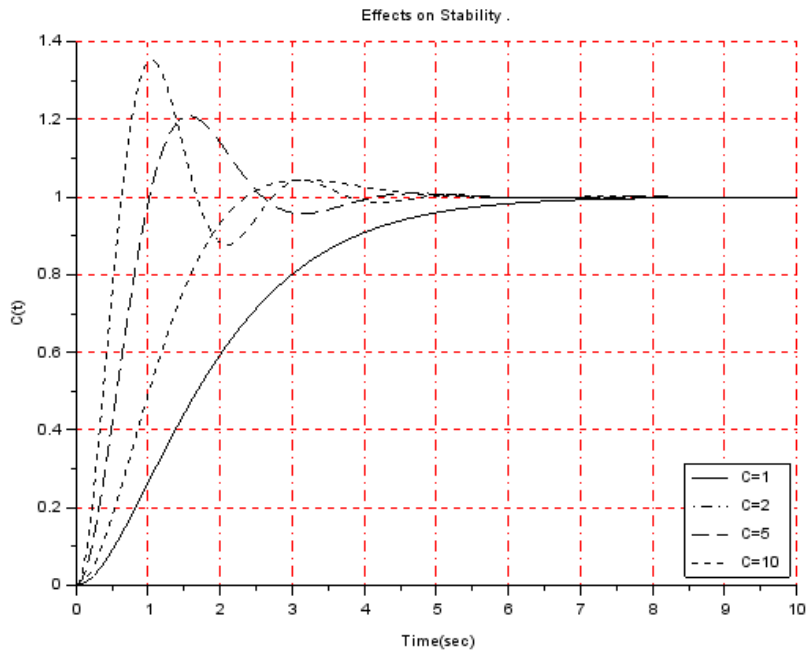


Figure 3.1: exp3

Scilab code Solution 3.4 exp4

```
1  //Frequency Domain Methods for controller design
2
3  // 1- Normalized bandwidth vs Damping factor (second
       order system)
4  deff("[a]=f1(b)","a=sqrt(1-2*b^2+sqrt(2-4*b^2+4*b^4)
       )")
5  b=[0:0.01:0.9];
6  subplot(311)
7  fplot2d(b,f1,[1])
8  xgrid(2)
9  xtitle(['Normalized bandwidth vs Damping Factor'],'
       Damping ratio', ' Normalized bandwidth ' );
10
11 // 2- Peak overshoot vs Resonance Peak (second
       order system)
12 deff("[C]=f2(b)","C=exp((-%pi*b)/sqrt(1-b^2))")
13 deff("[D]=f3(b)","D=1/(2*b*sqrt(1-b^2))")
14 b=[0.05:0.01:0.9];
15 subplot(312)
16 xset("line style",4);
17 fplot2d(b,f2,[1])
18 xset("line style",1);
19 fplot2d(b,f3,[1])
20 xgrid(3)
21 xtitle([' Peak overshoot vs Resonance Peak' ],'
       Damping ratio', 'Peak Gain, Resonance Gain' );
22 legends([' Peak Gain';' Resonance Gain'
       ],[[1;4],[1;1]],opt=1);
23
24 // 3- Resonant Frequency vs Damping Frequency (
       Second order system)
25 deff("[e]=f4(b)","e=sqrt(1-2*b^2)/sqrt(1-b^2)")
```

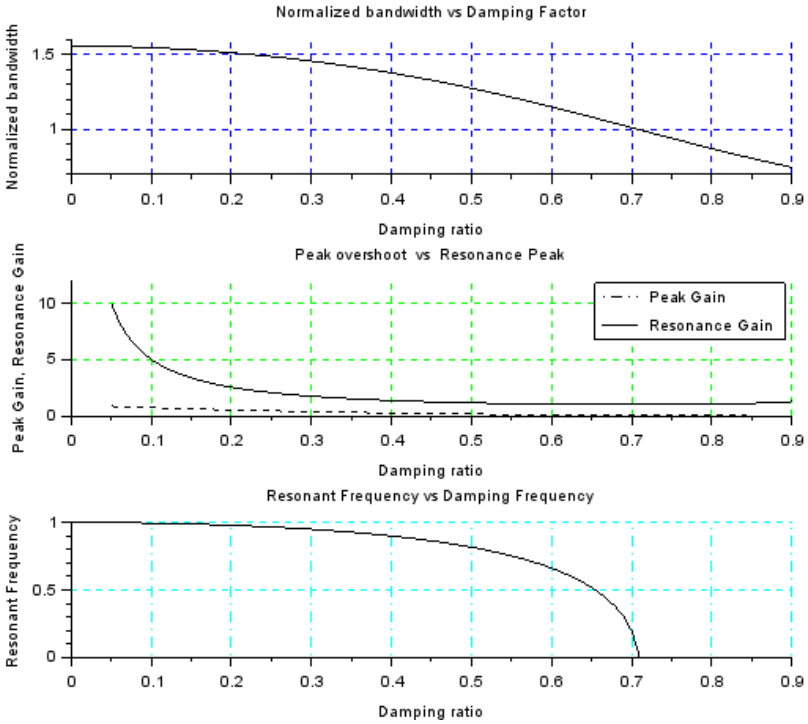


Figure 3.2: exp4

```
26 b=[0:0.01:0.9];// don't end with 1 bec, division by
     0 error
27 subplot(313)
28 fplot2d(b,f4,[1])
29 xgrid(4)
30 xtitle(['Resonant Frequency vs Damping Frequency'],'
     Damping ratio', '  Resonant Frequency ');
```