

Scilab Textbook Companion for  
Probability And Statistics For Engineers And  
Scientists  
by S. M. Ross<sup>1</sup>

Created by  
Deeksha Sinha  
Dual Degree  
Electrical Engineering  
IIT Bombay  
College Teacher  
None  
Cross-Checked by  
Mukul R. Kulkarni

July 31, 2019

<sup>1</sup>Funded by a grant from the National Mission on Education through ICT,  
<http://spoken-tutorial.org/NMEICT-Intro>. This Textbook Companion and Scilab  
codes written in it can be downloaded from the "Textbook Companion Project"  
section at the website <http://scilab.in>

# **Book Description**

**Title:** Probability And Statistics For Engineers And Scientists

**Author:** S. M. Ross

**Publisher:** Elsevier, New Delhi

**Edition:** 3

**Year:** 2005

**ISBN:** 81-8147-730-8

Scilab numbering policy used in this document and the relation to the above book.

**Exa** Example (Solved example)

**Eqn** Equation (Particular equation of the above book)

**AP** Appendix to Example(Scilab Code that is an Appednix to a particular Example of the above book)

For example, Exa 3.51 means solved example 3.51 of this book. Sec 2.3 means a scilab code whose theory is explained in Section 2.3 of the book.

# Contents

<b>List of Scilab Codes</b>	<b>4</b>
<b>2 Descriptive Statistics</b>	<b>5</b>
<b>3 Elements Of Probability</b>	<b>13</b>
<b>4 Random Variables And Expectation</b>	<b>20</b>
<b>5 Special Random Variables</b>	<b>31</b>
<b>6 Distribution of Sampling Statistics</b>	<b>41</b>
<b>7 Parameter Estimation</b>	<b>45</b>
<b>8 Hypothesis Testing</b>	<b>58</b>
<b>9 Regression</b>	<b>69</b>
<b>10 Analysis of Variance</b>	<b>93</b>
<b>11 Goodness of Fit Tests and Categorical Data Analysis</b>	<b>99</b>
<b>12 Non parametric Hypothesis Tests</b>	<b>109</b>
<b>13 Quality Control</b>	<b>116</b>



# List of Scilab Codes

Exa 2.2a	Relative Frequency . . . . .	5
Exa 2.2b	pie chart . . . . .	5
Exa 2.3a	Sample mean . . . . .	7
Exa 2.3b	Sample mean of age . . . . .	7
Exa 2.3c	Sample Median . . . . .	7
Exa 2.3d	Mean and Median . . . . .	8
Exa 2.3e	Mean Median and Mode . . . . .	8
Exa 2.3f	sample variance . . . . .	9
Exa 2.3g	sample variance of accidents . . . . .	9
Exa 2.3h	Percentile . . . . .	10
Exa 2.3i	Quartiles . . . . .	10
Exa 2.4a	Chebyshev Inequality . . . . .	10
Exa 2.5a	Empirical Rule . . . . .	11
Exa 2.6a	Sample Correlation Coefficient . . . . .	11
Exa 2.6b	Sample Correlation Coefficient . . . . .	12
Exa 3.4a	Union . . . . .	13
Exa 3.5a	Basic Principle of Counting . . . . .	13
Exa 3.5b	Basic Principle of Counting . . . . .	14
Exa 3.5c	Basic Principle of Counting . . . . .	14
Exa 3.5d	Committee Probability . . . . .	14
Exa 3.5f	Pairing Probability . . . . .	15
Exa 3.6a	Acceptable Transistor . . . . .	16
Exa 3.6b	Both Boys . . . . .	16
Exa 3.6c	Branch Manager . . . . .	17
Exa 3.7a	Accident Probability . . . . .	17
Exa 3.7b	Accident within a year . . . . .	17
Exa 3.7c	Multiple Choice Test . . . . .	17
Exa 3.7d	blood test . . . . .	18

Exa 3.7e	Criminal Investigation . . . . .	18
Exa 3.7f	Missing Plane . . . . .	18
Exa 3.8a	Independent Events . . . . .	19
Exa 4.1a	sum of two fair dice . . . . .	20
Exa 4.1b	Defective or Acceptable . . . . .	21
Exa 4.1c	X exceeds 1 . . . . .	22
Exa 4.2a	sum of pmf . . . . .	22
Exa 4.2b	pdf . . . . .	22
Exa 4.3a	Joint distribution of batteries . . . . .	23
Exa 4.3b	Joint distribution of boys and girls . . . . .	24
Exa 4.3c	Joint Density Function . . . . .	25
Exa 4.3e	Density of Independent Random Variables .	25
Exa 4.3f	Conditional Probability Mass Function . . .	25
Exa 4.3g	Conditional Probability Mass Function . . .	26
Exa 4.4a	Expectation of a fair die . . . . .	26
Exa 4.4d	Expectation of the message time . . . . .	26
Exa 4.5a	Expectation . . . . .	27
Exa 4.5b	Expected cost of breakdown . . . . .	27
Exa 4.5c	Expectation . . . . .	27
Exa 4.5d	Expectation . . . . .	27
Exa 4.5e	Expected profit . . . . .	28
Exa 4.5f	Letters in Correct Envelopes . . . . .	28
Exa 4.5g	Different types of coupons . . . . .	28
Exa 4.6a	Variance of a fair die . . . . .	29
Exa 4.7a	Variance of 10 rolls of a fair die . . . . .	29
Exa 4.7b	Variance of 10 tosses of a coin . . . . .	30
Exa 4.9a	Inequalities . . . . .	30
Exa 5.1a	Returning of disks . . . . .	31
Exa 5.1b	Colour of Eyes . . . . .	31
Exa 5.1e	Binomial Random Variable . . . . .	32
Exa 5.2a	Probability of accident . . . . .	32
Exa 5.2b	Defective Items . . . . .	33
Exa 5.2c	Number of Alpha particles . . . . .	33
Exa 5.2d	Claims handled by an insurance company .	33
Exa 5.2f	Defective stereos . . . . .	34
Exa 5.3a	Functional system . . . . .	34
Exa 5.3b	Determining Population Size . . . . .	35
Exa 5.3c	Conditional Probability . . . . .	35

Exa 5.4b	Bus Timings . . . . .	36
Exa 5.4c	Current in a diode . . . . .	36
Exa 5.5a	Normal Random Variable . . . . .	36
Exa 5.5b	Noise in Binary Message . . . . .	37
Exa 5.5c	Power dissipation . . . . .	37
Exa 5.5d	Yearly precipitation . . . . .	37
Exa 5.6a	Wearing of Battery . . . . .	38
Exa 5.6b	Working Machines . . . . .	38
Exa 5.6c	Series System . . . . .	39
Exa 5.8a	Chi square random variable . . . . .	39
Exa 5.8b	Chi square random variable . . . . .	39
Exa 5.8c	Locating a Target . . . . .	39
Exa 5.8d	Locating a Target in 2D space . . . . .	39
Exa 5.8e	T distribution . . . . .	40
Exa 5.8f	F Distribution . . . . .	40
Exa 6.3a	Claims handled by an insurance company . . . . .	41
Exa 6.3c	Class strength . . . . .	41
Exa 6.3d	Weights of workers . . . . .	42
Exa 6.3e	Distance of a start . . . . .	42
Exa 6.5a	Processing time . . . . .	43
Exa 6.6a	Candidate winning an election . . . . .	43
Exa 6.6b	Pork consumption . . . . .	44
Exa 7.2a	Maximum likelihood estimator of a bernoulli parameter . . . . .	45
Exa 7.2b	Errors in a manuscript . . . . .	45
Exa 7.2c	Maximum likelihood estimator of a poisson parameter . . . . .	45
Exa 7.2d	Number of traffic accidents . . . . .	46
Exa 7.2e	Maximum likelihood estimator in a normal population . . . . .	46
Exa 7.2f	Kolmogorovs law of fragmentation . . . . .	46
Exa 7.2g	Estimating Mean of a Uniform Distribution . . . . .	47
Exa 7.3a	Error in a signal . . . . .	47
Exa 7.3b	Confidence interval . . . . .	47
Exa 7.3c	Confidence interval . . . . .	48
Exa 7.3d	Weight of a salmon . . . . .	49
Exa 7.3e	Error in a signal . . . . .	49
Exa 7.3f	Average resting pulse . . . . .	49

Exa 7.3g	Evaluating integrals . . . . .	50
Exa 7.3h	Thickness of washers . . . . .	50
Exa 7.4a	Cable insulation . . . . .	51
Exa 7.4b	Battery production . . . . .	52
Exa 7.5a	Transistors . . . . .	53
Exa 7.5b	Survey . . . . .	53
Exa 7.5c	Acceptable chips . . . . .	53
Exa 7.6a	Life of a product . . . . .	54
Exa 7.7a	Point estimator . . . . .	54
Exa 7.7b	Point estimator . . . . .	55
Exa 7.7c	Point estimator of a uniform distribution . . .	55
Exa 7.8a	Bayes estimator . . . . .	56
Exa 7.8b	Bayes estimator of a normal population . . .	56
Exa 7.8d	estimator of the signal value . . . . .	56
Exa 8.3a	Noise in a Signal . . . . .	58
Exa 8.3b	Error in a signal . . . . .	58
Exa 8.3c	Error in a signal . . . . .	59
Exa 8.3d	Number of signals to be sent . . . . .	59
Exa 8.3e	Number of signals to be sent . . . . .	60
Exa 8.3f	Nicotine content in a cigarette . . . . .	60
Exa 8.3g	Blood cholestrol level . . . . .	61
Exa 8.3h	Water usage . . . . .	61
Exa 8.3i	Life of a tire . . . . .	62
Exa 8.3j	Service Time . . . . .	62
Exa 8.4a	Tire lives . . . . .	63
Exa 8.4b	Medicine for cold . . . . .	63
Exa 8.4c	Unknown population variance . . . . .	64
Exa 8.4d	effectiveness of safety program . . . . .	65
Exa 8.5a	effectiveness of machine . . . . .	65
Exa 8.5b	Catalyst . . . . .	65
Exa 8.6a	Computer chip manufacturing . . . . .	66
Exa 8.6b	Finding p value . . . . .	66
Exa 8.6c	Change in manufacturing pattern . . . . .	67
Exa 8.7a	Mean number of defective chips . . . . .	67
Exa 8.7b	Safety Conditions in a plant . . . . .	67
Exa 8.7c	Better proof reader . . . . .	68
Exa 9.1a	Scatter Diagram . . . . .	69
Exa 9.2a	Relative humidity and moisture content . . .	69

Exa 9.3a	Moisture against Density . . . . .	72
Exa 9.4a	Effect of speed on mileage . . . . .	73
Exa 9.4b	Confidence interval estimate . . . . .	74
Exa 9.4c	Regression to the mean . . . . .	75
Exa 9.4d	Motor vehicle deaths . . . . .	78
Exa 9.4e	Confidence interval for height . . . . .	78
Exa 9.4f	Confidence interval for height . . . . .	79
Exa 9.5a	Height of son and father . . . . .	81
Exa 9.7a	Percentage of chemical used . . . . .	83
Exa 9.8b	Distance vs Travel Time . . . . .	84
Exa 9.9a	Polynomial Fitting . . . . .	84
Exa 9.10a	Multiple Linear Regression . . . . .	86
Exa 9.10b	Estimate of variance . . . . .	88
Exa 9.10c	Diameter of a tree . . . . .	89
Exa 9.10d	Estimating hardness . . . . .	90
Exa 9.11a	Animal fsickalling . . . . .	92
Exa 10.3a	Dependence of mileage on gas used . . . . .	93
Exa 10.3b	Dependence of mileage on gas used . . . . .	94
Exa 10.3c	Difference in GPA . . . . .	95
Exa 10.4b	Estimating Parameters . . . . .	96
Exa 10.5a	Species collected . . . . .	97
Exa 11.2a	Relation between death date and birth date . . . . .	99
Exa 11.2b	Quality of bulbs . . . . .	100
Exa 11.2d	Six outcomes . . . . .	100
Exa 11.3a	Weekly accidents . . . . .	101
Exa 11.4a	Ploitical affiliation and Gender . . . . .	103
Exa 11.4b	Machine Breakdown and shift . . . . .	104
Exa 11.5a	Lung cancer and smoking . . . . .	105
Exa 11.5b	Females reporting abuse . . . . .	106
Exa 11.6a	Testing distribution of a population . . . . .	107
Exa 12.2a	testing the median . . . . .	109
Exa 12.2b	testing the median . . . . .	109
Exa 12.3b	Signed Rank Test . . . . .	110
Exa 12.3c	Determining Population Distribution . . . . .	111
Exa 12.4a	Treatments against corrosion . . . . .	111
Exa 12.4b	Determining P . . . . .	112
Exa 12.4c	Finding p value . . . . .	113
Exa 12.4d	Comparing production methods . . . . .	113

Exa 12.4e	Determining p value . . . . .	113
Exa 12.5a	Testing randomness . . . . .	114
Exa 12.5c	Determining p value . . . . .	115
Exa 13.2a	Steel shaft diameter . . . . .	116
Exa 13.2b	unknown mean and variance . . . . .	117
Exa 13.3a	determining control limits . . . . .	117
Exa 13.4a	Defectives Screws . . . . .	120
Exa 13.5a	Control during production of cars . . . . .	121
Exa 13.6b	Service Time . . . . .	122
Exa 13.6c	Exponentially weighted moving average control . . . . .	123
Exa 13.6d	Finding control limit . . . . .	125
Exa 14.3a	Lifetime of a transistor . . . . .	127
Exa 14.3b	Lifetime of Battery . . . . .	128
Exa 14.3c	One at a time sequential test . . . . .	128
Exa 14.3d	Lifetime of semiconductors . . . . .	129
Exa 14.3e	Bayes estimator . . . . .	129
Exa 14.4a	Lifetime of items produced by two plants . .	129

# Chapter 2

## Descriptive Statistics

Scilab code Exa 2.2a Relative Frequency

```
1 starting_salary = [47 48 49 50 51 52 53 54 56 57  
60];  
2 frequency = [4 1 3 5 8 10 0 5 2 3 1];  
3 total = sum(frequency);  
4 relative_frequency = frequency/total;  
5 disp("The relative frequencies are ")  
6 disp(relative_frequency)
```

---

Scilab code Exa 2.2b pie chart

```
1 values = [42 50 32 55 9 12];  
2 percentages = values*100 / sum(values);  
3 new_text = string(percentages);  
4 text = ["Lung ", "Breast ", "Colon ", "Prostate ", "  
Melanoma ", "Bladder "];  
5 percentage_sign = ["%", "%", "%", "%", "%", "%"];  
6 final_text = text + new_text + percentage_sign;
```

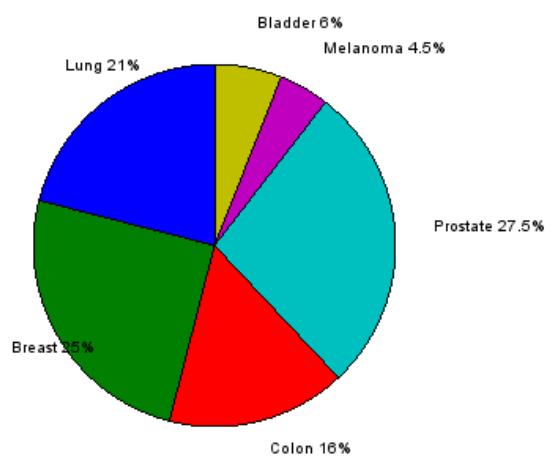


Figure 2.1: pie chart

```
7 // pie([42 50 32 55 9 12], ["Lung", "Breast", "Colon  
", "Prostate", "Melanoma", "Bladder"]);  
8 pie(values , final_text);
```

---

### Scilab code Exa 2.3a Sample mean

```
1 scores=[284, 280, 277, 282, 279, 285, 281, 283, 278,  
277];  
2 new_scores = scores - 280;  
3 final_mean = mean(new_scores)+ 280;  
4 disp(final_mean)
```

---

### Scilab code Exa 2.3b Sample mean of age

```
1 age= [15 16 17 18 19 20];  
2 frequencies = [2 5 11 9 14 13];  
3 product = age.*frequencies;  
4 total_people = sum(frequencies);  
5 mean_age = sum(product)/total_people ;  
6 disp("The sample mean of the ages is")  
7 disp(mean_age)
```

---

### Scilab code Exa 2.3c Sample Median

```
1 age= [15 16 17 18 19 20];  
2 frequencies = [2 5 11 9 14 13];  
3 i=1;  
4 for j=1:6  
5     for k = 1:frequencies(j)  
6         final_age(i) = age(j);
```

```
7         i = i +1 ;
8     end;
9 end
10
11
12 final_median = median(final_age);
13 disp(final_median);
```

---

### Scilab code Exa 2.3d Mean and Median

```
1 germ_free_mice = [158 192 193 194 195 202 212 215
2   229 230 237 240 244 247 259 301 301 321 337 415
3   434 444 485 496 529 537 624 707 800];
4 conventional_mice = [159 189 191 198 235 245 250 256
5   261 265 266 280 343 356 383 403 414 428 432];
6 disp (mean(germ_free_mice), "Sample mean for germ-
7   free mice is ");
8 disp (median(germ_free_mice), "Sample median for
9   germ-free mice is ");
10 disp (mean(conventional_mice), "Sample mean for
11   conventional mice is ");
12 disp (median(conventional_mice), "Sample mean for
13   conventional mice is ");
```

---

### Scilab code Exa 2.3e Mean Median and Mode

```
1 value = [1 2 3 4 5 6];
2 frequencies= [9 8 5 5 6 7];
3 i=1;
4 for j=1:6
5   for k = 1:frequencies(j)
6     final_value(i) = value(j);
7     i = i +1 ;
```

```
8     end;
9 end
10 product = value.*frequencies;
11 disp(product , sum(product))
12
13 total_value = sum(frequencies);
14 mean_value = sum(product)/total_value ; //the answer
    in the textbook is incorrect
15 [m1 m2]= max(frequencies);
16 n= m2;
17
18 disp("The sample mean is")
19 disp(mean_value)
20 disp(median(final_value), "The median is")
21 disp(value(n) , "The mode is")
```

---

### Scilab code Exa 2.3f sample variance

```
1 A = [ 3 4 6 7 10];
2 B= [-20 5 15 24];
3 disp(variance(A) , "The sample variance of A is")
4 disp(variance(B) , "The sample variance of B is")
```

---

### Scilab code Exa 2.3g sample variance of accidents

```
1 accidents = [22 22 26 28 27 25 30 29 24];
2 new_accidents = accidents - 22;
3 disp(variance(new_accidents) , "The variance of the
    number of accidents is")
```

---

### Scilab code Exa 2.3h Percentile

```
1 population = [7333253 3448613 2731743 1702086  
    1524249 1151977 1048949 1022830 998905 992038  
    816884 752279 734676 702979 665070 635913 617044  
    614289 579307 567094 547727 520947 514013 504505  
    493559];  
2 disp(perctl(population, 10), "The sample 10  
percentile is")  
3 disp(perctl(population, 80), "The sample 80  
percentile is")  
4 disp(perctl(population, 50), "The sample 80  
percentile is")  
5 disp(median(population), "The median is")
```

---

### Scilab code Exa 2.3i Quartiles

```
1 noise = [ 82 89 94 110 74 122 112 95 100 78 65 60  
    90 83 87 75 114 85 69 94 124 115 107 88 97 74 72  
    68 83 91 90 102 77 125 108 65];  
2 disp(quart(noise), "The quartiles are")
```

---

### Scilab code Exa 2.4a Chebyshev Inequality

```
1 cars = [448162 404192 368327 318308 272122 260486  
    249128 234936 218540 207977];  
2 interval1 = mean(cars) - (1.5*stdev(cars));  
3 interval2 = mean(cars) + (1.5*stdev(cars));  
4 data = 100*5/9;  
5 disp(interval2, , "to" , interval1, "Atleast 55.55%  
of the data lies in the interval" );
```

---

### Scilab code Exa 2.5a Empirical Rule

```
1 data = [90 91 94 83 85 85 87 88 72 74 74 75 77 77 78  
       60 62 63 64 66 66 52 55 55 56 58 43 46];  
2 disp("According to the empirical rule")  
3 disp("68% of the data lies between")  
4 disp(mean(data)+stdev(data), "and", mean(data)-stdev  
      (data))  
5 disp("95% of the data lies between")  
6 disp(mean(data)+(2*stdev(data)), "and", mean(data)  
      -(2*stdev(data)))  
7 disp("99.7% of the data lies between")  
8 disp(mean(data)+(3*stdev(data)), "and", mean(data)  
      -(3*stdev(data)))
```

---

### Scilab code Exa 2.6a Sample Correlation Coefficient

```
1 temp = [24.2 22.7 30.5 28.6 25.5 32.0 28.6 26.5 25.3  
         26.0 24.4 24.8 20.6 25.1 21.4 23.7 23.9 25.2  
         27.4 28.3 28.8 26.6];  
2 defects = [25 31 36 33 19 24 27 25 16 14 22 23 20 25  
            25 23 27 30 33 32 35 24];  
3 temp_new = temp - mean(temp);  
4 defects_new = defects - mean(defects);  
5 num=0  
6 s1 =0;  
7 s2=0;  
8 for i=1:22  
9     num = num + (temp_new(i)*defects_new(i));  
10    s1 = s1 + (temp_new(i)*temp_new(i));  
11    s2 = s2 + (defects_new(i)*defects_new(i));  
12 end
```

```
13 coefficient = num/sqrt(s1*s2);  
14 disp(coefficient)
```

---

### Scilab code Exa 2.6b Sample Correlation Coefficient

```
1 year = [12 16 13 18 19 12 18 19 12 14];  
2 pulserate = [73 67 74 63 73 84 60 62 76 71];  
3 year_new = year - mean(year);  
4 pulserate_new = pulserate - mean(pulserate);  
5 num=0  
6 s1 =0;  
7 s2=0;  
8 for i=1:10  
9     num = num + (year_new(i)*pulserate_new(i));  
10    s1 = s1 + (year_new(i)*year_new(i));  
11    s2 = s2 + (pulserate_new(i)*pulserate_new(i));  
12 end  
13 coefficient = num/sqrt(s1*s2);  
14 disp(coefficient)
```

---

# Chapter 3

## Elements Of Probability

### Scilab code Exa 3.4a Union

```
1 cigarette = 0.28;
2 cigar = 0.07;
3 cigar_and_cigarette = 0.05 ;
4 cigar_or_cigarette = cigarette + cigar -
    cigar_and_cigarette;
5 disp( "% of the males smoke neither cigar nor
cigarette", (1-cigar_or_cigarette)*100 )
```

---

### Scilab code Exa 3.5a Basic Principle of Counting

```
1 white_balls= 6;
2 black_balls = 5;
3 total = white_balls + black_balls;
4 probability_whiteandblack = white_balls*black_balls
    /(total*(total-1));
5 probability_blackandwhite = white_balls*black_balls
    /(total*(total-1));
6 reqd_probability = probability_whiteandblack +
    probability_blackandwhite;
```

```
7 disp(reqd_probability , "Thus, the required  
probability is")
```

---

### Scilab code Exa 3.5b Basic Principle of Counting

```
1 maths = 4;  
2 chemistry = 3;  
3 history = 2;  
4 language = 1;  
5 total_arrangements = factorial(4)*factorial(maths)*  
    factorial(chemistry)*factorial(history)*factorial  
    (language);  
6 disp(total_arrangements , "The total number of  
possible arrangements is ")
```

---

### Scilab code Exa 3.5c Basic Principle of Counting

```
1 men = 6;  
2 women = 4;  
3 disp(factorial(men+women) , "No of different rankings  
possible is")  
4 women_top4 = factorial(women)*factorial(men);  
5 prob = women_top4/factorial(men+women);  
6 disp(prob , "Probability that women receive the top 4  
scores is")
```

---

### Scilab code Exa 3.5d Committee Probability

```
1 men = 6;  
2 women = 9;
```

```

3 reqd_size =5;
4 total =factorial(men+women)/(factorial(reqd_size)*
    factorial(men+women-reqd_size));
5 given_committee = factorial(men)*factorial(women)/(
    factorial(3)*factorial(2)*factorial(men-3)*
    factorial(women-2));
6 prob = given_committee/total;
7 disp(prob, "Probability that the committee consists
of 3 men and 2 women is")

```

---

### Scilab code Exa 3.5f Pairing Probability

```

1 black_p = 6;
2 white_p = 6;
3 pair = 2;
4 total_p = black_p + white_p;
5
6
7
8
9 total_pairs = 1;
10 while(total_p >0)
11     total_pairs = total_pairs*factorial(total_p)/(
        factorial(pair) * factorial(total_p - pair) );
12     total_p = total_p -2;
13 //disp(total_pairs)
14 end
15 //disp(total_pairs)
16 total_pairs= total_pairs/factorial(6);
17 black_pairs = 1;
18 while(black_p >0)
19     black_pairs = black_pairs*factorial(black_p)/(
        factorial(pair) * factorial(black_p - pair) );

```

```
20     black_p = black_p -2;
21     //disp( black_pairs )
22 end
23 black_pairs= black_pairs/factorial(3);
24 //disp( black_pairs )
25
26
27 white_pairs = black_pairs;
28 allowed_pairs = black_pairs * white_pairs;
29 probb = allowed_pairs/ total_pairs;
30 disp(probb, " Probability that a random pairing will
not result in any of the white and black players
rooming together is ")
```

---

### Scilab code Exa 3.6a Acceptable Transistor

```
1 defective =5;
2 partially_defective = 10;
3 acceptable = 25;
4 disp(acceptable/(acceptable+partially_defective), "
The required probability is")
```

---

### Scilab code Exa 3.6b Both Boys

```
1 prob_bb = 0.25;
2 prob_bg = 0.25;
3 prob_gb = 0.25;
4 prob_gg = 0.25;
5 disp(prob_bb/(prob_bg+prob_gb+prob_bb), " Probability
that both are boys is")
```

---

### Scilab code Exa 3.6c Branch Manager

```
1 prob_phoenix = 0.3;
2 prob_manager = 0.6;
3 disp(prob_phoenix*prob_manager , " Probability that
    Perez will be a Phoenix branch office manager is"
)
```

---

### Scilab code Exa 3.7a Accident Probability

```
1 accident_prone= 0.4;
2 nonaccident_prone= 0.2;
3 pop_accident = 0.3;
4 prob = pop_accident*accident_prone + (1-pop_accident
    )*nonaccident_prone;
5 disp(prob , "The required probability is ");
```

---

### Scilab code Exa 3.7b Accident within a year

```
1 accident_prone= 0.4;
2 nonaccident_prone= 0.2;
3 pop_accident = 0.3;
4 prob_of_accident = pop_accident*accident_prone + (1-
    pop_accident)*nonaccident_prone;
5 prob = pop_accident * accident_prone /
    prob_of_accident;
6 disp(prob , "The required probability is")
```

---

### Scilab code Exa 3.7c Multiple Choice Test

```
1 m = 5;
2 p =1/2;
3 disp( (m*p)/(1+((m-1)*p)), "The required probability
   is")
```

---

### Scilab code Exa 3.7d blood test

```
1 detect_present = 0.99;
2 detect_notpresent = 0.01;
3 pop_disease = 0.005;
4 prob = detect_present*pop_disease/((detect_present*
   pop_disease) +(detect_notpresent*(1-pop_disease))
   );
5 disp(prob, "The required probability is")
```

---

### Scilab code Exa 3.7e Criminal Investigation

```
1 criminal_char = 0.9
2 convinced= 0.6;
3 pop_char = 0.2;
4 prob = (convinced*criminal_char) /((convinced*
   criminal_char) +(pop_char*(1-convinced)));
5 disp(prob, "The required probability is")
```

---

### Scilab code Exa 3.7f Missing Plane

```
1 alpha1 = 0.4;
2 plane_in_region1 = 1/3;
3 plane_in_region2 = 1/3;
4 plane_in_region3 = 1/3;
```

```
5 prob1 = (alpha1*plane_in_region1)/((alpha1*  
    plane_in_region1)+ 1*plane_in_region2 + 1*  
    plane_in_region3);  
6 prob2 = (1*plane_in_region2)/((alpha1*  
    plane_in_region1)+ 1*plane_in_region2 + 1*  
    plane_in_region3);  
7 disp(prob1 , "The probability that the planes is in  
region 1 given that the search of region 1 did  
not uncover it ");  
8 disp(prob2 , "The probability that the planes is in  
region 2/3 given that the search of region 1 did  
not uncover it ");
```

---

### Scilab code Exa 3.8a Independent Events

```
1 prob_A = 4/52;  
2 prob_H = 13/52;  
3 disp(prob_A*prob_H , "P(AH) is")
```

---

# Chapter 4

## Random Variables And Expectation

Scilab code Exa 4.1a sum of two fair dice

```
1 p11 = 1/36;
2 p12 = 1/36;
3 p13 = 1/36;
4 p14 = 1/36;
5 p15 = 1/36;
6 p16 = 1/36;
7 p21 = 1/36;
8 p22 = 1/36;
9 p23 = 1/36;
10 p24 = 1/36;
11 p25 = 1/36;
12 p26 = 1/36;
13 p31 = 1/36;
14 p32 = 1/36;
15 p33 = 1/36;
16 p34 = 1/36;
17 p35 = 1/36;
18 p36 = 1/36;
19 p41 = 1/36;
```

```

20 p42 = 1/36;
21 p43 = 1/36;
22 p44 = 1/36;
23 p45 = 1/36;
24 p46 = 1/36;
25 p51 = 1/36;
26 p52 = 1/36;
27 p53 = 1/36;
28 p54 = 1/36;
29 p55 = 1/36;
30 p56 = 1/36;
31 p61 = 1/36;
32 p62 = 1/36;
33 p63 = 1/36;
34 p64 = 1/36;
35 p65 = 1/36;
36 p66 = 1/36;
37 disp(p11, "Probability that the sum is 2")
38 disp(p12+p21, "Probability that the sum is 3")
39 disp(p13+p31+p22, "Probability that the sum is 4")
40 disp(p14+p41+p32+p23, "Probability that the sum is 5
    ")
41 disp(p15+p51+p24+p42+p33, "Probability that the sum
    is 6")
42 disp(p16+p61+p25+p52+p34+p43, "Probability that the
    sum is 7")
43 disp(p26+p62+p35+p53+p44, "Probability that the sum
    is 8")
44 disp(p36+p63+p45+p54, "Probability that the sum is 9
    ")
45 disp(p46+p64+p55, "Probability that the sum is 10")
46 disp(p65+p56, "Probability that the sum is 11")
47 disp(p66, "Probability that the sum is 12")

```

---

### Scilab code Exa 4.1b Defective or Acceptable

```
1 pdd= 0.09;
2 pda = 0.21;
3 pad = 0.21;
4 paa = 0.49;
5
6 disp(pdd, "Probability that the number of acceptable
    components is 0 is")
7 disp(pda+pad, "Probability that the number of
    acceptable components is 1 is")
8 disp(paa, "Probability that the number of acceptable
    components is 2 is")
9 disp(pdd, "Probability that I is 0 is")
10
11 disp(paa+pad+pda, "Probability that I is 1 is")
```

---

#### Scilab code Exa 4.1c X exceeds 1

```
1 prob = 1-(1-(1/%e));
2 disp( prob, "Probability that X exceeds 1 is")
```

---

#### Scilab code Exa 4.2a sum of pmf

```
1 p1 = 1/2;
2 p2 = 1/3;
3 disp (1-(p1+p2), "Probability that X is 3 is ")
```

---

#### Scilab code Exa 4.2b pdf

```
1
2 integral = integrate('((4*x)-(2*x*x))', 'x', 0, 2);
```

```

3 C = 1/integral;
4 disp(C, "The value of C is")
5 integral_new = integrate('C*((4*x)-(2*x*x))', 'x',
0, 1);
6 disp(1-integral_new, "Probability that X is greater
than 1 is")

```

---

### Scilab code Exa 4.3a Joint distribution of batteries

```

1 new = 3;
2 working = 4;
3 defective = 5;
4 total = factorial(12)/(factorial(3)*factorial(9));
5 disp(factorial(5)/(factorial(3)*factorial(2)*total),
"Probability that X=0 and Y=0");
6 disp(factorial(5)*factorial(4)/(factorial(3) *
factorial(2)*factorial(3)*total), "Probability
that X=0 and Y=1");
7 disp(factorial(5)*factorial(4)/(factorial(2) *
factorial(2)*factorial(4)*total), "Probability
that X=0 and Y=2");
8 disp(factorial(4)/(factorial(3)*factorial(1)*total),
"Probability that X=0 and Y=3");
9 disp(factorial(3)*factorial(5)/(factorial(2) *
factorial(2)*factorial(3)*total), "Probability
that X=1 and Y=0");
10 disp(factorial(5)*factorial(4)*factorial(3)/(
factorial(2)*factorial(3)*factorial(4)*total), "
Probability that X=1 and Y=1");
11 disp(factorial(3)*factorial(4)/(factorial(2) *
factorial(2)*factorial(2)*total), "Probability
that X=1 and Y=2");
12 disp(factorial(3)*factorial(5)/(factorial(2) *
factorial(4)*factorial(1)*total), "Probability
that X=2 and Y=0");

```

```
13 disp(factorial(3)*factorial(4)/(factorial(2)*  
    factorial(1)*factorial(3)*total), " Probability  
    that X=2 and Y=1");  
14 disp(factorial(3)/(factorial(3)*total), " Probability  
    that X=3 and Y=3");
```

---

### Scilab code Exa 4.3b Joint distribution of boys and girls

```
1 child0 = 0.15;  
2 child1 = 0.2;  
3 child2 = 0.35;  
4 child3 = 0.30;  
5 pboy = 0.5;  
6 pgirl = 0.5;  
7  
8 disp(child0 , " Probability that B=0 and G=0")  
9 disp(child1*pgirl , " Probability that B=0 and G=1")  
10 disp(child2*pgirl*pgirl , " Probability that B=0 and  
    G=2")  
11 disp(child3*pgirl*pgirl*pgirl , " Probability that B  
    =0 and G=3")  
12 disp(child1*pboy , " Probability that B=1 and G=0")  
13 disp(child2*pgirl*pboy , " Probability that B=1 and G  
    =1")  
14 disp(child3*pgirl*pgirl*pboy , " Probability that B=1  
    and G=2")  
15 disp(child2*pboy*pboy , " Probability that B=2 and G  
    =0")  
16 disp(child3*pgirl*pboy*pboy , " Probability that B=2  
    and G=1")  
17 disp(child3*pboy*pboy*pboy , " Probability that B=3  
    and G=0")
```

---

### Scilab code Exa 4.3c Joint Density Function

```
1 intx= integrate( '%e^(-x)' , 'x' , 0 , 1 );
2 inty=integrate( '2*%e^(-2*y)' , 'y' , 0 , 1 );
3 answer = (1-intx)*inty;
4 disp(answer , " Probability that X>1 and Y<1 is")
5
6 //For other two parts , symbolic manipulations are
   required
```

---

### Scilab code Exa 4.3e Density of Independent Random Variables

```
1 pdec3 = 0.05;
2 pdec2= 0.1;
3 pdec1 = 0.2;
4 p0= 0.3
5 pinc1= 0.2;
6 pinc2= 0.1;
7 pinc3 = 0.05;
8 disp(pinc1*pinc2*p0 , " Probability that the stock
   price will increase successively by 1, 2 and 0
   points in the next 3 days is")
```

---

### Scilab code Exa 4.3f Conditional Probability Mass Function

```
1 disp(0.1/0.3875 , " probability that B =0 given G=1 ")
   ;
2 disp(0.175/0.3875 , " probability that B =1 given G=1
   ");
3 disp(0.1125/0.3875 , " probability that B =2 given G=1
   ");
4 disp(0/0.3875 , " probability that B =3 given G=1 ");
5 //The values are taken from Table 4.2
```

---

### Scilab code Exa 4.3g Conditional Probability Mass Function

```
1 p00=0.4;
2 p01 = 0.2;
3 p10 = 0.1;
4 p11= 0.3;
5
6 pY1= p01+p11;
7 disp(p01/pY1, " Probability that X=0 and Y=1")
8 disp(p11/pY1, " Probability that X=1 and Y=1")
```

---

### Scilab code Exa 4.4a Expectation of a fair die

```
1 p1=1/6;
2 p2=1/6;
3 p3=1/6;
4 p4=1/6;
5 p5=1/6;
6 p6=1/6;
7 expec= p1 + (2*p2)+(3*p3)+(4*p4)+(5*p5)+ (6*p6);
8 disp(expec)
```

---

### Scilab code Exa 4.4d Expectation of the message time

```
1 expec= integrate( '(x)/1.5 ', 'x', 0,1.5);
2 disp(" hours", expec, "On an average , you have to
      wait for ")
```

---

### Scilab code Exa 4.5a Expectation

```
1 p0= 0.2;
2 p1= 0.5;
3 p2=0.3;
4 expec = 0*0*p0 + 1*1*p1 + 2*2*p2;
5 disp(expec , "Expectation of X^2 is")
```

---

### Scilab code Exa 4.5b Expected cost of breakdown

```
1 expec = integrate('x^3', 'x', 0, 1);
2 disp(expec , "The expectation is")
```

---

### Scilab code Exa 4.5c Expectation

```
1 p0= 0.2;
2 p1= 0.5;
3 p2=0.3;
4 expec = 0*0*p0 + 1*1*p1 + 2*2*p2;
5 disp(expec , "Expectation of X^2 is")
```

---

### Scilab code Exa 4.5d Expectation

```
1 expec = integrate('x^3', 'x', 0, 1);
2 disp(expec , "The expectation is")
```

---

### Scilab code Exa 4.5e Expected profit

```
1 profit1 = 10;
2 profit2= 20;
3 profit3 = 40;
4 prob1= 0.2;
5 prob2 = 0.8;
6 prob3 = 0.3;
7 expec = profit1*prob1 + profit2*prob2 + profit3*
    prob3;
8 disp(" thousand dollars", expec, "The expectd profit
    is")
```

---

### Scilab code Exa 4.5f Letters in Correct Envelopes

```
1 //As scilab does not symbolic computations , this
   example is solved taking N=5
2 prob = 1/5 //probability that a letter is put into
   the right envelope
3 EX1 = 1*prob+0*(1-prob);
4 EX2 = 1*prob+0*(1-prob);
5 EX3 = 1*prob+0*(1-prob);
6 EX4 = 1*prob+0*(1-prob);
7 EX5 = 1*prob+0*(1-prob);
8 EX= EX1 + EX2+ EX3 +EX4 + EX5;
9 disp(EX, "Thus , the expectation is")
```

---

### Scilab code Exa 4.5g Different types of coupons

```
1 ProbXiequals1 = 1 - ((19/20)^10);  
2 EXi = ProbXiequals1 ;  
3 EX = 20*EXi;  
4 disp(EX, "The expectation is")
```

---

### Scilab code Exa 4.6a Variance of a fair die

```
1 probXequalsi = 1/6;  
2 expecXsquared = 0;  
3 for n=1:6  
4     expecXsquared = expecXsquared + (n*n*  
        probXequalsi)  
5 end  
6  
7 expecX= 3.5 // from eg 4.4a  
8 var = expecXsquared - (expecX^2);  
9 disp(var, "The variance is")
```

---

### Scilab code Exa 4.7a Variance of 10 rolls of a fair die

```
1 probXequalsi = 1/6;  
2 expecXsquared = 0;  
3 for n=1:6  
4     expecXsquared = expecXsquared + (n*n*  
        probXequalsi)  
5 end  
6  
7 expecX= 3.5 // from eg 4.4a  
8 var = expecXsquared - (expecX^2);  
9 var10 = var*10;  
10 disp(var10, "The variance is")
```

---

**Scilab code Exa 4.7b Variance of 10 tosses of a coin**

```
1 probIj = 0.5;
2 varIj = probIj*(1-probIj);
3 var = 10*varIj;
4 disp(var, "Thus, the required variance is")
```

---

**Scilab code Exa 4.9a Inequalities**

```
1 avg = 50;
2 probX75 = avg/75;
3 disp(probX75, "Probability that X>75 is")
4 var = 25;
5 upperlimit = var/100;
6 disp(1-upperlimit, "Probability that X lies between
40 and 60 is")
```

---

# Chapter 5

## Special Random Variables

### Scilab code Exa 5.1a Returning of disks

```
1 defects= 0.01;
2 disks = 10;
3 package = 3;
4 probdefect0 = ((1-defects)^10);
5 probdefect1 = factorial(disks)*defects*((1-defects)
    ^9)/factorial(disks-1);
6 prob = 1 - probdefect0 -probdefect1;
7 disp(prob, "Probability that a package will be
    returned is")
8 newprob = factorial(package)*prob*((1-prob)^2)/
    factorial(package-1);
9 disp(newprob, "Probability that exactly one of the
    packages will be returned among 3 is" )
10
11 //the solution in the textbook is approximate
```

---

### Scilab code Exa 5.1b Colour of Eyes

```

1 function result= binomial(n, k, p)
2     result = factorial(n)*(p^k)*((1-p)^(n-k))/(
3         factorial(k)*factorial(n-k))
4 endfunction
5
6 children = 4;
7 reqblueeyes = 2;
8 probblueeyes = 0.5*0.5;
9 prob = binomial(children, reqblueeyes, probblueeyes)
10 ;
11 disp(prob, "The reqd probability is")

```

---

### Scilab code Exa 5.1e Binomial Random Variable

```

1 function result=bin(n,k, p)
2 if(k==0)
3     result = (1-p)^n;
4 else
5     result = p*(n-k+1)*bin(n, k-1, p)/((1-p)*k
6 );
7 end
8 endfunction
9
10 disp(bin(6, 0, 0.4), " Probability that X=0 is ")
11 disp(bin(6, 1, 0.4), " Probability that X=1 is ")
12 disp(bin(6, 2, 0.4), " Probability that X=2 is ")
13 disp(bin(6, 3, 0.4), " Probability that X=3 is ")
14 disp(bin(6, 4, 0.4), " Probability that X=4 is ")
15 disp(bin(6, 5, 0.4), " Probability that X=5 is ")
16 disp(bin(6, 6, 0.4), " Probability that X=6 is ")

```

---

### Scilab code Exa 5.2a Probability of accident

```
1 [probX0, Q]= cdfpoi("PQ", 0, 3);
2 probX1 = 1- probX0;
3 disp(probX1, "Probability that there is at least one
accident this week is ")
```

---

### Scilab code Exa 5.2b Defective Items

```
1 function result= bino(n, k, p)
2     result = factorial(n)*(p^k)*((1-p)^(n-k))/(
        factorial(k)*factorial(n-k))
3 endfunction
4
5 prob = bino(10,0, 0.1) + bino(10, 1,0.1 );
6 disp(prob, "The exact probability is ");
7
8 probp = cdfpoi("PQ", 1, 1)
9 disp(probp, "The poisson approximation is ")
```

---

### Scilab code Exa 5.2c Number of Alpha particles

```
1 Xlam = 3.2;
2 i =2;
3 prob = cdfpoi("PQ", i, Xlam);
4 disp(prob)
```

---

### Scilab code Exa 5.2d Claims handled by an insurance company

```
1 function result= bino(n, k, p)
2     result = factorial(n)*(p^k)*((1-p)^(n-k))/(
        factorial(k)*factorial(n-k))
```

```

3 endfunction
4 avg = 5;
5 i=3;
6 prob = cdfpoi("PQ", 2, avg);
7 disp(prob, "Proportion of days that have less than 3
      claims is")
8 probX4 = cdfpoi("PQ", i+1, avg) - cdfpoi("PQ", i, avg
      );
9
10 reqdprob = bino(5,3 , probX4);
11 disp(reqdprob, "Probability that 3 of the next 5
      days will have exactly 4 claims is ")

```

---

### Scilab code Exa 5.2f Defective stereos

```

1 avg = 4;
2 prob = cdfpoi("PQ", 3, 2*avg)
3 disp(prob)

```

---

### Scilab code Exa 5.3a Functional system

```

1 function result= hyper(N, M, n, i)
2     result = factorial(N)*factorial(M)*factorial(n)*
             factorial(N+M-n)/(factorial(i)*factorial(N-i)
             *factorial(n-i)*factorial(M-n+i)*factorial(N+
             M));
3 endfunction
4
5 prob = hyper(15, 5,6, 4)+hyper(15, 5,6,5)+hyper
      (15,5,6,6);
6 disp(prob, "Probability that the system will be
      functional is")

```

---

### Scilab code Exa 5.3b Determining Population Size

```
1 function result= hyper(N, M, n, i)
2     result = factorial(N)*factorial(M)*factorial(n)*
3             factorial(N+M-n)/(factorial(i)*factorial(N-i)
4             *factorial(n-i)*factorial(M-n+i)*factorial(N+
5             M));
6 endfunction
7
8 r= 50;
9 n=100;
10 X=25;
11 disp(r*n/X , "Estimate of the number of animals in
the region is")
```

---

### Scilab code Exa 5.3c Conditional Probability

```
1 function result= bino(n, k, p)
2     result = factorial(n)*(p^k)*((1-p)^(n-k))/(
3         factorial(k)*factorial(n-k))
4 endfunction
5
6 function answer= condprob(n,k,p,i)
7     answer = bino(n,i,p)*bino(m,k-i,p)/bino(n+m,k, p
8     );
9 endfunction
10 //The function condprob will give P{X=i | X+Y=k}
```

---

### Scilab code Exa 5.4b Bus Timings

```
1 pass_f = 1/30;
2 prob1 = (15-10)*pass_f + (30-25)*pass_f;
3 prob2 = (3-0)*pass_f + (18-15)*pass_f;
4 disp(prob1, "Probability that he waits less than 5
    minutes for a bus")
5 disp(prob2, "Probability that he waits at least 12
    minutes for a bus")
```

---

### Scilab code Exa 5.4c Current in a diode

```
1 a=5;
2 I0=10^-6;
3 v_f = 1/(3-1);
4 vupperlim = 3;
5 vlowerlim = 1;
6 expecV = (vupperlim + vlowerlim)/2;
7 expec = integrate('(%e^(a*x))/2', 'x', 1,3);
8 expecI=I0*(expec -1);
9 disp(expecI)
```

---

### Scilab code Exa 5.5a Normal Random Variable

```
1 u= 3;
2 var = 16;
3
4 prob1 = cdfnor("PQ", 11, u, sqrt(var));
5 disp(prob1, " P{X<11}");
6 prob2 = 1- cdfnor( "PQ", -1, u, sqrt(var));
7 disp(prob2, "P{X>-1}");
8 prob3= cdfnor("PQ", 7, u, sqrt(var)) - cdfnor("PQ",
    2, u, sqrt(var));
```

```
9 disp(prob3 , "P{2<X<7}");
```

---

#### Scilab code Exa 5.5b Noise in Binary Message

```
1 disp(cdfnor("PQ", -1.5, 0, 1), "P{error | message is  
1}")  
2 disp(1-cdfnor("PQ", 2.5, 0, 1), "P{error | message is  
0 }")
```

---

#### Scilab code Exa 5.5c Power dissipation

```
1 r =3;  
2 avg = 6;  
3 std= 1;  
4 var = std^2;  
5 expecV2 = var + (avg^2);  
6 expecW = 3*expecV2;  
7 disp(expecW, "Expectation of W is ")  
8 limw=120;  
9 limV = sqrt(limw/r);  
10 disp(1-cdfnor("PQ", limV, avg, std), "P{W>120} is")
```

---

#### Scilab code Exa 5.5d Yearly precipitation

```
1 meanX1 = 12.08;  
2 meanX2= 12.08;  
3 stX1= 3.1;  
4 meanX = meanX1 + meanX2;  
5 varX = 2*(3.1^2);  
6 lim= 25;
```

```
7 disp(1-cdfnor("PQ", lim, meanX, sqrt(varX)), "
    Probability that the total precipitation during
    the next 2 years will exceed 25 inches")
8
9 meanXnew= meanX1 - meanX2;
10 new_lim= 3;
11 disp(1- cdfnor("PQ", new_lim, meanXnew, sqrt(varX)),
    "Probability that precipitation in the next year
    will exceed that in the following year by more
    than 3 inches")
```

---

### Scilab code Exa 5.6a Wearing of Battery

```
1 lamda = 1/10000;
2 x = 5000;
3 prob = %e^(-1*lamda*x);
4 disp(prob, " Probability that she will be able to
    complete her trip without having to replace her
    car battery is");
```

---

### Scilab code Exa 5.6b Working Machines

```
1 //When C is put to use , one other machine(either A
    or B ) will still be working . The probability of
    this machine or C failing is equal due to the
    memoryless propoerty of exponential random
    variables .
2
3 disp(1/2, "The probability that machine which is
    still operable is machine C is ")
```

---

### Scilab code Exa 5.6c Series System

```
1 function result= new(lamda,n, t )
2     newsum = 0;
3     for i=1:n
4         newsum= newsum + lamda(i)
5         result=%e ^(-1*newsum*t)
6     end
7 endfunction
```

---

### Scilab code Exa 5.8a Chi square random variable

```
1 disp(cdfchn("PQ", 30, 26, 0));
```

---

### Scilab code Exa 5.8b Chi square random variable

```
1 disp(cdfchn("X", 15, 0, 0.95, 0.05))
```

---

### Scilab code Exa 5.8c Locating a Target

```
1 disp(1- cdfchn("PQ", 9/4, 3, 0))
```

---

### Scilab code Exa 5.8d Locating a Target in 2D space

```
1 disp(1- cdfchn("PQ", 2.25, 2, 0))
```

---

**Scilab code Exa 5.8e T distribution**

```
1 disp(cdf t ("PQ", 1.4, 12), "P{T12 <=1.4}") ;
2 disp(cdf t ("T", 9, 0.975, 0.025), "t0.025, 9")
```

---

**Scilab code Exa 5.8f F Distribution**

```
1 disp(cdff("PQ", 1.5, 6, 14))
```

---

# Chapter 6

## Distribution of Sampling Statistics

Scilab code Exa 6.3a Claims handled by an insurance company

```
1 number = 25000;
2 meaneach = 320;
3 sdeach = 540;
4 claim = 8300000;
5 meantotal= meaneach*number;
6 sdtotal = sdeach*sqrt(number);
7 disp(1- cdfnor("PQ",claim, meantotal, sdtotal ))
```

---

Scilab code Exa 6.3c Class strength

```
1 ideal_num = 150;
2 actual_num = 450;
3 attend = 0.3;
4 tolerance = 0.5
5 disp(1-cdfnor("PQ",ideal_num+tolerance, actual_num*
    attend, sqrt(actual_num*attend*(1-attend)) ))
```

---

### Scilab code Exa 6.3d Weights of workers

```
1 meaneach = 167;
2 sdeach = 27;
3 num = 36;
4 sdtotal = sdeach/sqrt(num);
5 //sdtotal = sdtotal*sdtotal;
6 //disp(sdtotal)
7 disp(cdfnor("PQ", 170, meaneach, sdtotal)-cdfnor("PQ
    ", 163, meaneach,sdtotal ), "Probability that the
        sample mean of their weights lies between 163
        and 170(when sample size is 36)")
8
9 num=144;
10 sdtotal = sdeach/sqrt(num);
11 //disp(sdtotal)
12 disp(cdfnor("PQ", 170, meaneach, sdtotal)-cdfnor("PQ
    ", 163, meaneach,sdtotal ), "Probability that the
        sample mean of their weights lies between 163
        and 170(when sample size is 144)")
13
14 //The answer given in the textbook is incorrect as
    (170-167)/4.5 is not equal to 0.6259 .
```

---

### Scilab code Exa 6.3e Distance of a start

```
1 prob = 0.95;
2 lim = 0.5;
3 X = cdfnor("X", 0,1, 0.975, 0.025 )
4 disp(ceil((4*X)^2), "Observations are necessary (
    atleast)")
```

---

### Scilab code Exa 6.5a Processing time

```
1 n= 15;
2 sigmasquare= 9;
3 lim =12;
4 actual_lim = (n-1)*lim/sigmasquare;
5 prob = 1- cdfchi("PQ", actual_lim, (n-1))
6 disp(prob)
```

---

### Scilab code Exa 6.6a Candidate winning an election

```
1 favour = 0.45;
2 samplesize = 200;
3 expec= favour*samplesize;
4 sd = sqrt(samplesize*favour*(1-favour));
5 disp(expec, "The expected value is ")
6 disp(sd, "The standard deviation is ")
7
8 function result= bino(n, k, p)
9     result = factorial(n)*(p^k)*((1-p)^(n-k))/(
    factorial(k)*factorial(n-k))
10 endfunction
11
12 //newsum = 0;
13 //for i=1:10
14 //    newsum = newsum + bino(200,i, favour)
15 //end
16 //prob = 1-newsum;/*
17
18 lim = 101;
19 tolerance = 0.5;
20 lim= lim - tolerance;
```

```
21 prob = 1- cdfnor("PQ", lim, expec, sd)
22
23 disp(prob, "Probability that more than half the
      members of the sample favour the candidate")
```

---

### Scilab code Exa 6.6b Pork consumption

```
1 meaneach = 147;
2 sdeach = 62;
3 samplesize = 25;
4 lim = 150;
5 samplemean = meaneach;
6 samplesd= sdeach/sqrt(samplesize)
7 prob = 1- cdfnor("PQ", lim, samplemean, samplesd)
8 disp(prob)
```

---

# Chapter 7

## Parameter Estimation

Scilab code Exa 7.2a Maximum likelihood estimator of a bernoulli parameter

```
1 samplesize = 1000;
2 acceptable =921;
3 disp(acceptable/samplesize , "The maximum likelihood
estimate of p is")
```

---

Scilab code Exa 7.2b Errors in a manuscript

```
1 function result= totalerror(n1, n2, n12)
2     result = n1*n2/n12;
3 endfunction
```

---

Scilab code Exa 7.2c Maximum likelihood estimator of a poisson parameter

```
1 total_people = 857;
2 days= 20;
```

```
3 disp(total_people/days, "The maximum likelihood  
estimate of lambda")
```

---

#### Scilab code Exa 7.2d Number of traffic accidents

```
1 accidents= [4 0 6 5 2 1 2 0 4 3 ];  
2 lambda= mean(accidents)  
3 disp(cdfpoi("PQ", 2, lambda))
```

---

#### Scilab code Exa 7.2e Maximum likelihood estimator in a normal population

```
1 function[u, sigmasquared]=normal(X, Xmean, n)  
2 u= Xmean;  
3 newsum = 0;  
4 for i= 1:n  
5 newsum= newsum + (X(i)-Xmean)^2  
6 end  
7 sigmasquared = sqrt((newsum/n));  
8 endfunction
```

---

#### Scilab code Exa 7.2f Kolmogorovs law of fragmentation

```
1 X= [2.2 3.4 1.6 0.8 2.7 3.3 1.6 2.8 2.5 1.9]  
2 upperlimX = 3  
3 lowerlimX = 2;  
4 upperlimlogX= log(upperlimX);  
5 lowerlimlogX = log(lowerlimX);  
6  
7 logX = log(X)  
8 samplemean= mean(logX)
```

```
9 samplesd= sqrt(variance(logX))  
10 //disp(samplemean)  
11 //disp(samplesd)  
12 prob = cdfnor("PQ", upperlimlogX, samplemean,  
    samplesd) - cdfnor("PQ", lowerlimlogX, samplemean  
    , samplesd)  
13 disp(prob)
```

---

#### Scilab code Exa 7.2g Estimating Mean of a Uniform Distribution

```
1 function result= unif(X, n)  
2     result = max(X)/2;  
3 endfunction
```

---

#### Scilab code Exa 7.3a Error in a signal

```
1 avg = 0;  
2 var = 4;  
3 num = 9;  
4 X =[5 8.5 12 15 7 9 7.5 6.5 10.5];  
5 samplemean= mean(X);  
6 lowerlim = samplemean - (1.96*sqrt(var/num))  
7 upperlim = samplemean + (1.96*sqrt(var/num))  
8  
9 disp(upperlim, "to ",lowerlim,"The 95% confidence  
interval is ", )
```

---

#### Scilab code Exa 7.3b Confidence interval

```
1 avg = 0;
```

```

2 var = 4;
3 num = 9;
4 X =[5 8.5 12 15 7 9 7.5 6.5 10.5];
5 samplemean= mean(X);
6 lowerlim = samplemean - (1.645*sqrt(var/num))
7 upperlim = samplemean + (1.645*sqrt(var/num))
8
9 disp(" to infinity", lowerlim,"The 95% upper
confidence interval is " )
10 disp(upperlim,"The 95% upper confidence interval is
minus infinity to " )

```

---

### Scilab code Exa 7.3c Confidence interval

```

1 var = 4;
2 num = 9;
3 X =[5 8.5 12 15 7 9 7.5 6.5 10.5];
4 samplemean= mean(X);
5 alpha= 0.005;
6 zalpha = cdfnor("X", 0, 1,1-alpha ,alpha);
7 //disp(zalpha)
8 lowerlim = samplemean - (zalpha*sqrt(var/num))
9 upperlim = samplemean + (zalpha*sqrt(var/num))
10 disp(upperlim, "to ",lowerlim,"The 95% confidence
interval is ", )
11
12 alpha= 0.01;
13 zalpha = cdfnor("X", 0, 1,1-alpha ,alpha);
14 lowerlim = samplemean - (zalpha*sqrt(var/num))
15 upperlim = samplemean + (zalpha*sqrt(var/num))
16 disp(" to infinity", lowerlim,"The 95% upper
confidence interval is " )
17 disp(upperlim,"The 95% upper confidence interval is
minus infinity to " )

```

---

### Scilab code Exa 7.3d Weight of a salmon

```
1 sd= 0.3;
2 lim = 0.1;
3 num = (1.96*sd/lim)^2;
4 disp(num, "Sample size should be greater than");
```

---

### Scilab code Exa 7.3e Error in a signal

```
1 X = [5 8.5 12 15 7 9 7.5 6.5 10.5];
2 num = 9;
3 meanX= mean(X);
4 X2 = X^2;
5 s2= (sum(X2)- (num*(meanX^2)))/(num-1);
6 s= sqrt(s2);
7 tval = cdft("T", num-1, 0.975, 0.025);
8 //disp(tval)
9 upperlim = meanX + (tval*s)/sqrt(num);
10 lowerlim = meanX - (tval*s)/sqrt(num);
11 disp(upperlim, "to ",lowerlim,"The 95% confidence
interval is ", )
```

---

### Scilab code Exa 7.3f Average resting pulse

```
1 X = [54 63 58 72 49 92 70 73 69 104 48 66 80 64 77];
2 num = 15;
3 meanX= mean(X);
4 X2 = X^2;
5 s2= (sum(X2)- (num*(meanX^2)))/(num-1);
```

```
6 s= sqrt(s2);
7 tval = cdft("T", num-1, 0.975, 0.025);
8 //disp(tval)
9 upperlim = meanX + (tval*s)/sqrt(num);
10 lowerlim = meanX - (tval*s)/sqrt(num);
11 disp(upperlim, "to ",lowerlim,"The 95% confidence
    interval is ", )
12 alpha = 0.05;
13 tval = cdft("T", num-1, 1-alpha, alpha);
14 lim = meanX + (tval*s)/sqrt(num);
15 disp(lim, "The 95% lower confidence interval is from
    minus infinity to ")
```

---

### Scilab code Exa 7.3g Evaluating integrals

```
1 meanX = 0.786;
2 s= 0.03;
3 num = 100;
4 alpha = 0.05;
5 tval = cdft("T", num-1, 1-alpha, alpha);
6 upperlim = meanX + (tval*s)/sqrt(num);
7 lowerlim = meanX - (tval*s)/sqrt(num);
8 disp(upperlim, "to ",lowerlim,"The 95% confidence
    interval is ", )
```

---

### Scilab code Exa 7.3h Thickness of washers

```
1 num=10;
2 X= [0.123 0.133 0.124 0.126 0.120 0.130 0.125 0.128
      0.124 0.126];
3 //disp(variance(X))
4 s2 = variance(X);
5 chi1 = cdfchi("X",num-1,0.95, 0.05 );
```

```

6 chi2 = cdfchi("X",num-1,0.05, 0.95 );
7 //disp(chi1, chi2)
8 lowerlim = (num-1)*s2/chi2;
9 upperlim = (num-1)*s2/chi1;
10 disp(sqrt(upperlim), "to ",sqrt(lowerlim),"The 90%
    confidence interval is " )

```

---

### Scilab code Exa 7.4a Cable insulation

```

1 A=[36 44 41 53 38 36 34 54 52 37 51 44 35 44];
2 B=[52 64 38 68 66 52 60 44 48 46 70 62];
3 sigmaA= 40;
4 sigmaB= 100;
5 alpha = 1-0.95;
6 beta= alpha/2;
7 meanA = mean(A);
8 meanB= mean(B);
9 zbeta = cdfnor("X",0, 1, 1-beta, beta );
10
11 lowerlim= mean(A) - mean(B) - (zbeta*sqrt((sigmaA/
    length(A)) + (sigmaB/length(B)))) ;
12 upperlim= mean(A) - mean(B) + (zbeta*sqrt((sigmaA/
    length(A)) + (sigmaB/length(B)))) ;
13 disp(upperlim, "to ",lowerlim,"The 95% confidence
    interval is " )
14
15 beta=alpha;
16 zbeta = cdfnor("X",0, 1, 1-beta, beta );
17
18 upperlim= mean(A) - mean(B) + (zbeta*sqrt((sigmaA/
    length(A)) + (sigmaB/length(B)))) ;
19 disp(upperlim, "A value that exceed the difference
    of the means with 95% confidence is" )

```

---

### Scilab code Exa 7.4b Battery production

```
1 tech1 = [140 136 138 150 152 144 132 142 150 154 136
           142];
2 tech2 = [144 132 136 140 128 150 130 134 130 146 128
           131 137 135];
3 num1= 12;
4 num2= 14;
5 mean1= mean(tech1);
6 mean2= mean(tech2);
7 //disp(mean1)
8 //disp(Sp)
9 alpha = 0.9;
10 S1 = variance(tech1) /*num1/(num1-1);
11 S2 = variance(tech2) /* *num2/(num2-1);
12 Sp = (((num1-1)*S1) + ((num2-1)*S2))/(num1+ num2 -2)
      ;
13 Sp= sqrt(Sp);
14 num= (1/num1)+(1/num2);
15 betaa = (1-alpha)/2;
16 tval = cdft("T", num1+num2-2, 1-betaa, betaa);
17 upperlim = mean1-mean2 + (tval*Sp)*sqrt(num);
18 lowerlim = mean1-mean2 - (tval*Sp)*sqrt(num);
19 disp(upperlim, "to ",lowerlim,"The 90% confidence
      interval is ")
20 alpha = 0.95
21 betaaa = 1-alpha;
22 tval = cdft("T", num1+num2-2, 1-betaaa, betaaa);
23 lowerlim = mean1-mean2 - (tval*Sp)*sqrt(num);
24 disp("the upper confidence interval is")
25 disp(" to infinity", lowerlim)
```

---

### Scilab code Exa 7.5a Transistors

```
1 phat = 0.8;
2 zalpha = 1.96;
3
4 samplesize = 100;
5 lowerlim = phat - (zalpha*sqrt(phat*(1-phat)/
    samplesize));
6 upperlim = phat + (zalpha*sqrt(phat*(1-phat)/
    samplesize));
7 disp(upperlim, "to ",lowerlim,"The 95% confidence
    interval is " )
```

---

### Scilab code Exa 7.5b Survey

```
1 phat = 0.52;
2 error = 0.04;
3 zalpha = 1.96;
4 //lowerlim = phat - (zalpha*sqrt(phat*(1-phat)/
    samplesize));
5 //upperlim = phat + (zalpha*sqrt(phat*(1-phat)/
    samplesize));
6 samplesize = (error/zalpha)^2/(phat*(1-phat));
7 disp(1/samplesize)
```

---

### Scilab code Exa 7.5c Acceptable chips

```
1 initialsample = 30;
2 acceptable= 26;
3 phat = acceptable/initialsample;
4 error = 0.05/2;
5 zalpha = 2.58;
6
```

```

7 samplesize = (error/zalpha)^2/(phat*(1-phat));
8 finalsize = ceil(1/samplesize);
9 acceptablenew= 1040 + acceptable;
10 phat = acceptablenew/finalsize;
11 lowerlim = phat - (zalpha*sqrt(phat*(1-phat)/
    finalsize));
12 upperlim = phat + (zalpha*sqrt(phat*(1-phat)/
    finalsize));
13 disp(upperlim, "to ",lowerlim,"The 99% confidence
    interval is " )

```

---

### Scilab code Exa 7.6a Life of a product

```

1 sum_lives = 1740;
2 num = 10;
3 alpha = (1-0.95)/2;
4 chi1= cdfchi("X", (2*num), alpha, 1-alpha);
5 chi2 = cdfchi("X", (2*num), 1-alpha, alpha);
6 //disp(chi2)
7 lowerlim = 2*sum_lives/chi2;
8 upperlim = 2*sum_lives/chi1;
9 disp(upperlim, "to ",lowerlim,"The 95% confidence
    interval is " )
10
11 //The confidence interval is from 101.847 to 360.211
    whereas my solution in Scilab is 101.84489 to
    362.8485 because of the difference in the value
    of chi-square(0.975, 20). The textbook says the
    value is
12 9.661 whereas scilab calculates its value as 9.59

```

---

### Scilab code Exa 7.7a Point estimator

```
1 function result1= estimator1(X)
2     result1= X(1);
3     //result2= mean(X);
4
5 endfunction
6 function result2= estimator2(X)
7     //result1= X(1);
8     result2= mean(X);
9
10 endfunction
```

---

### Scilab code Exa 7.7b Point estimator

```
1 function result1 = estimate(d, sigma)
2     sigmainv = 1/sigma;
3     new = d./sigma;
4     result1 = sum(new)/sum(sigmainv);
5 endfunction
6
7 function result2 = mserror( sigma)
8     sigmainv = 1/sigma;
9
10    result1 = 1/sum(sigmainv);
11 endfunction
```

---

### Scilab code Exa 7.7c Point estimator of a uniform distribution

```
1 function result = unbiasedestimator(X, n)
2     c=(n+2)/(n+1);
3     result = c*max(X);
4 endfunction
```

---

**Scilab code Exa 7.8a Bayes estimator**

```
1 function result= estimator(X, n)
2     result= (sum(X) +1)/(n+2);
3 endfunction
```

---

**Scilab code Exa 7.8b Bayes estimator of a normal population**

```
1 function result= meanestimator(sigma0 , u, sigma , n ,
X)
2     meanX= mean(X);
3     result = (n*meanX/sigma0)/((n/sigma0)+(1/sigma))
+ (u/sigma)/((n/sigma0)+(1/sigma));
4 endfunction
5
6 function result= varestimator(sigma0 , sigma , n)
7     result = (sigma0*sigma)/((n*sigma)+sigma0);
8 endfunction
```

---

**Scilab code Exa 7.8d estimator of the signal value**

```
1 function result= meanestimator(sigma0 , u, sigma , n ,
X)
2     meanX= mean(X);
3     result = (n*meanX/sigma0)/((n/sigma0)+(1/sigma))
+ (u/sigma)/((n/sigma0)+(1/sigma));
4 endfunction
5
6 function result= varestimator(sigma0 , sigma , n)
```

```

7      result = (sigma0*sigma)/((n*sigma)+sigma0);
8 endfunction
9
10 u = 50;
11 sigma= 100;
12 sigma0 = 60;
13 n =1;
14 X =40;
15 expec = meanestimator(sigma0 , u, sigma, n, X);
16 var = varestimator (sigma0, sigma,n);
17 //disp(expec);
18 //disp(var);
19
20 zalpha = 1.645
21 lowerlim = -1*sqrt(var)*zalpha+expec;
22 upperlim = sqrt(var)*zalpha+expec;
23 disp(upperlim, "to ",lowerlim,"With probability 0.9 ,
    the sent signal lies between ", )

```

---

# Chapter 8

## Hypothesis Testing

Scilab code Exa 8.3a Noise in a Signal

```
1 noise_var = 4;
2 noise_mean= 0;
3 num = 5;
4 Xbar = 9.5;
5 u = 8;
6 statistic = sqrt(num/noise_var)*(Xbar - u);
7 compare = cdfnor("X", 0, 1, 0.975, 0.025);
8 if(statistic<compare)
9     disp("Hypothesis is accepted");
10 else
11     disp("Hypothesis is not accepted")
12 end
```

---

Scilab code Exa 8.3b Error in a signal

```
1 noise_var = 4;
2 noise_mean= 0;
3 num = 5;
```

```
4 Xbar = 8.5;
5 u = 8;
6 statistic = sqrt(num/noise_var)*(Xbar - u);
7
8 prob = 2*cdfnor("PQ", -1*statistic , 0,1 );
9 disp(prob, "P-value is")
```

---

### Scilab code Exa 8.3c Error in a signal

```
1 noise_var = 4;
2 num = 5;
3 Xbar = 10;
4 u = 8;
5 statistic = sqrt(num/noise_var)*(Xbar - u);
6 compare = cdfnor("X", 0, 1, 0.975, 0.025);
7 lim1 = statistic + compare;
8 lim2 = statistic - compare;
9 prob = cdfnor("PQ", lim1 , 0,1 ) - cdfnor("PQ", lim2
    , 0,1 );
10 disp(prob)
```

---

### Scilab code Exa 8.3d Number of signals to be sent

```
1 alpha = 0.025;
2 betaa = 0.25;
3
4 u1 = 9.2;
5 uo = 8;
6 var =4;
7 zalpha = cdfnor("X", 0, 1, 1-alpha , alpha);
8 zbeta = cdfnor("X", 0, 1, 1-betaa , betaa);
9 //disp(zalpha);
10 n = ((zalpha + zbeta)/(u1-uo))^2 *var;
```

```
11 disp(ceil(n), "Required number of samples is")
12 statistic = sqrt(ceil(n)/var)*(u1 - u0);
13 //disp(statistic);
14 lim1 = -1*statistic + zalpha;
15 lim2 = -1*statistic - zalpha;
16 //disp(lim1)
17 //disp(lim2)
18 prob = cdfnor("PQ", lim1 , 0,1 ) - cdfnor("PQ", lim2
    , 0,1 );
19 disp(1-prob, "Thus, if the message is sent the reqd
    number of times is , then the probability that
    the null hypothesis will be rejected is")
```

---

### Scilab code Exa 8.3e Number of signals to be sent

```
1 n =5;
2 Xbar = 9.5;
3 uo = 8;
4 var = 4;
5 statistic = sqrt(n/var)*(Xbar - uo);
6 p = 1 - cdfnor("PQ", statistic , 0, 1);
7 disp("The test would call for rejection at all
    significance levels greater than or equal to ")
8 disp(p);
```

---

### Scilab code Exa 8.3f Nicotine content in a cigarette

```
1 n =20;
2 Xbar = 1.54;
3 uo = 1.6;
4 sd = 0.8;
5 statistic = sqrt(n)*(Xbar - uo)/sd;
6 disp(statistic , "Test statistic is")
```

```
7 p = cdfnor("PQ", statistic, 0, 1);
8 disp(p, "P-value is")
```

---

### Scilab code Exa 8.3g Blood cholesterol level

```
1 n = 50;
2 Xbar = 14.8;
3 S = 6.4;
4 T = sqrt(n)*Xbar/S;
5 disp(T, "The T value is")
```

---

### Scilab code Exa 8.3h Water usage

```
1 X= [340 356 332 362 318 344 386 402 322 360 362 354
      340 372 338 375 364 355 324 370];
2 uo = 350;
3 Xbar = mean(X);
4 var = variance(X);
5 S = sqrt(var)
6 //disp(Xbar, sqrt(var));
7 n = length(X)
8 T = sqrt(n)*(Xbar - uo)/S;
9 Tvalue = cdft("T", n-1, 0.95, 0.05 );
10 //disp(Tvalue)
11 disp(T, "The T value is ")
12 if(T<Tvalue)
13     disp(" Null hypothesis is accepted at 10% level
          of significance")
14 else
15     disp(" Null hypothesis is not accepted at 10%
          level of significance")
16 end
```

---

### Scilab code Exa 8.3i Life of a tire

```
1 X= [36.1 40.2 33.8 38.5 42 35.8 37 41 36.8 37.2 33  
      36];  
2 n = length(X);  
3 uo = 40;  
4 Xbar=mean(X);  
5 sd = sqrt(variance(X));  
6 T = sqrt(n)*(Xbar - uo)/sd;  
7 Tvalue = cdft("T", n-1, 0.05, 0.95 );  
8 //disp(Tvalue)  
9 disp(T, "The T value is ")  
10 if(T<Tvalue)  
11     disp("Null hypothesis is rejected at 5% level of  
           significance")  
12 else  
13     disp("Null hypothesis is accepted at 5% level  
           of significance")  
14 end
```

---

### Scilab code Exa 8.3j Service Time

```
1 X = [8.6 9.4 5.0 4.4 3.7 11.4 10.0 7.6 14.4 12.2  
      11.0 14.4 9.3 10.5 10.3 7.7 8.3 6.4 9.2 5.7 7.9  
      9.4 9.0 13.3 11.6 10.0 9.5 6.6];  
2 n = length(X);  
3 uo = 8;  
4 Xbar=mean(X);  
5 sd = sqrt(variance(X));  
6 T = sqrt(n)*(Xbar - uo)/sd;  
7 disp(T, "The test statistic is ")  
8 p = 1- cdft("PQ", T, n-1);
```

```
9 disp(p, "P-value is")
10 disp("A small p value indicates that the mean
      service time exceeds 8 minutes")
```

---

### Scilab code Exa 8.4a Tire lives

```
1 A = [61.1 58.2 62.3 64 59.7 66.2 57.8 61.4 62.2
       63.6];
2 B= [62.2 56.6 66.4 56.2 57.4 58.4 57.6 65.4];
3 uA = mean(A);
4 uB = mean(B);
5 varA = 40^2;
6 varB =60^2;
7 n= length(A);
8 m =length(B);
9 den = sqrt((varA/n)+(varB/m));
10 statistic = (uA -uB)/den;
11 disp(statistic, "The test statistic is");
12 disp("A small value of the test statistic indicates
      that the null hypothesis is accepted")
```

---

### Scilab code Exa 8.4b Medicine for cold

```
1 X = [5.5 6.0 7.0 6.0 7.5 6.0 7.5 5.5 7.0 6.5];
2 Y = [6.5 6.0 8.5 7.0 6.5 8.0 7.5 6.5 7.5 6.0 8.5 7.0
      ];
3 n = length(X);
4 m= length(Y);
5 Xbar= mean(X);
6 Ybar = mean(Y);
7 Sx = variance(X);
8 Sy = variance(Y);
9 Sp = ((n-1)*Sx/(n+m-2)) + ((m-1)*Sy/(n+m-2));
```

```

10 den = sqrt(Sp*((1/n)+(1/m)));
11 TS = (Xbar -Ybar)/den;
12 disp(TS, "The test statistic is");
13 tvalue = cdft("T", m+n-2, 0.95, 0.05)
14 //disp(tvalue)
15 if(TS<tvalue)
16     disp("Null hypothesis is rejected at 5% level of
           significance")
17 else
18     disp("Null hypothesis is accepted at 5% level
           of significance")
19 end

```

---

### Scilab code Exa 8.4c Unknown population variance

```

1 A = [61.1 58.2 62.3 64 59.7 66.2 57.8 61.4 62.2
      63.6];
2 B= [62.2 56.6 66.4 56.2 57.4 58.4 57.6 65.4];
3 uA = mean(A);
4 uB = mean(B);
5 n= length(A);
6 m =length(B);
7 Sx = variance(A);
8 Sy = variance(B);
9 Sp = ((n-1)*Sx/(n+m-2)) + ((m-1)*Sy/(n+m-2));
10 den = sqrt(Sp*((1/n)+(1/m)));
11 TS = (uA-uB)/den;
12 disp(TS, "The test statistic is");
13 pvalue = 2*(1- cdft("PQ", TS, m+n-2));
14 //disp(tvalue)
15 disp(pvalue, "Null hypothesis is accepted at any
           significance level less than")

```

---

### Scilab code Exa 8.4d effectiveness of safety program

```
1 A = [30.5 18.5 24.5 32 16 15 23.5 25.5 28 18];
2 B = [23 21 22 28.5 14.5 15.5 24.5 21 23.5 16.5];
3 n= length(A);
4 W = B-A;
5 Wbar = mean(W);
6 S = sqrt(variance(W));
7 T = sqrt(n)*Wbar/S;
8
9 disp(T, "The test statistic is");
10 pvalue = cdft("PQ", T, n-1);
11 //disp(tvalue)
12 disp(pvalue, "The p value is")
```

---

### Scilab code Exa 8.5a effectiveness of machine

```
1 n =20;
2 S2= 0.025;
3 chk = 0.15;
4 compare = (n-1)*S2/(chk^2);
5 pvalue = 1- cdfchi("PQ", compare, n-1);
6 disp(pvalue, "The p-value is")
7 disp("Thus , the null hypothesis is accepted")
```

---

### Scilab code Exa 8.5b Catalyst

```
1 S1 = 0.14;
2 S2 = 0.28;
3 n= 10;
4 m= 12;
5 ratio = S1/S2;
6 prob1 = cdff("PQ", ratio, n-1, m-1);
```

```
7 prob2 = 1-prob1;
8 prob = min([prob1 prob2]);
9 pvalue = 2*prob;
10 disp(pvalue, "The p value is")
11 disp("So the hypothesis of equal variance cannot be
      rejected")
```

---

### Scilab code Exa 8.6a Computer chip manufacturing

```
1 samplesize = 300;
2 p =0.02;
3 defective=9;
4 val = 1- cdfbin("PQ", defective, samplesize, p, 1-p)
      ;
5 disp(val, "P0.02{X>10} = ");
6 disp("Manufacturers claim cannot be rejected at the
      5% level of significance")
```

---

### Scilab code Exa 8.6b Finding p value

```
1 samplesize = 300;
2 p =0.02;
3 defective=9;
4 compare = 10;
5 npo = samplesize*p;
6 sd = sqrt(npo*(1-p));
7 tol = 0.5;
8 pvalue = 1- cdfnor("PQ", compare-tol, npo, sd );
9 disp(pvalue, "The pvalue is")
```

---

### Scilab code Exa 8.6c Change in manufacturing pattern

```
1 samplesize = 500;
2 p = 0.04;
3 defective=16;
4 prob1 = cdfbin("PQ", defective, samplesize, p, 1-p)
5 prob2 = 1- cdfbin("PQ", defective-1, samplesize, p,
1-p);
6 pvalue = 2*min([prob1 prob2]);
7 disp(pvalue, "The pvalue is")
```

---

### Scilab code Exa 8.7a Mean number of defective chips

```
1 x = [28 34 32 38 22];
2 claim = 25;
3 total = sum(x);
4 pval = 1 - cdfpoi("PQ", total-1, (claim*length(x)));
5 disp(pval, "The pvalue is")
```

---

### Scilab code Exa 8.7b Safety Conditions in a plant

```
1 plant1 = [16 18 9 22 17 19 24 8];
2 plant2 = [22 18 26 30 25 28];
3 X1= sum(plant1);
4 X2 = sum(plant2);
5 n =length(X1);
6 m= length(X2);
7 //disp(X1, X2, X1+X2)
8 prob1 = 1 - cdfbin("PQ",X1 -1,X1+X2, (4/7), (3/7) );
9 prob2 = cdfbin("PQ",X1 ,X1+X2, 4/7, 3/7 );
10 disp(prob1, prob2)
11 pvalue = 2*min([prob1 prob2]);
12 disp(pvalue, "The pvalue is")
```

---

### Scilab code Exa 8.7c Better proof reader

```
1 Aerror =28;
2 Berror = 18;
3 common =10;
4 N2 = Aerror - common;
5 N3 =Berror- common;
6 pval = 1- cdfbin("PQ", N2-1, N2 + N3, 0.5, 0.5);
7 disp(pval, "P-value is")
```

---

# Chapter 9

## Regression

Scilab code Exa 9.1a Scatter Diagram

```
1 X= [100 110 120 130 140 150 160 170 180 190];
2 Y= [45 52 54 63 62 68 75 76 92 88];
3 plot2d(X, Y, -1);
4 disp("A linear regression model seems appropriate")
```

---

Scilab code Exa 9.2a Relative humidity and moisture content

```
1 A = [46 53 29 61 36 39 47 49 52 38 55 32 57 54 44];
2 B = [12 15 7 17 10 11 11 12 14 9 16 8 18 14 12];
3 plot2d(A, B, -1);
4 [X, Y] = reglin(A, B);
5 //disp(X);
6 //disp(Y);
7 p = 0 : 0.1: 65;
8 q = p.*X + Y
```

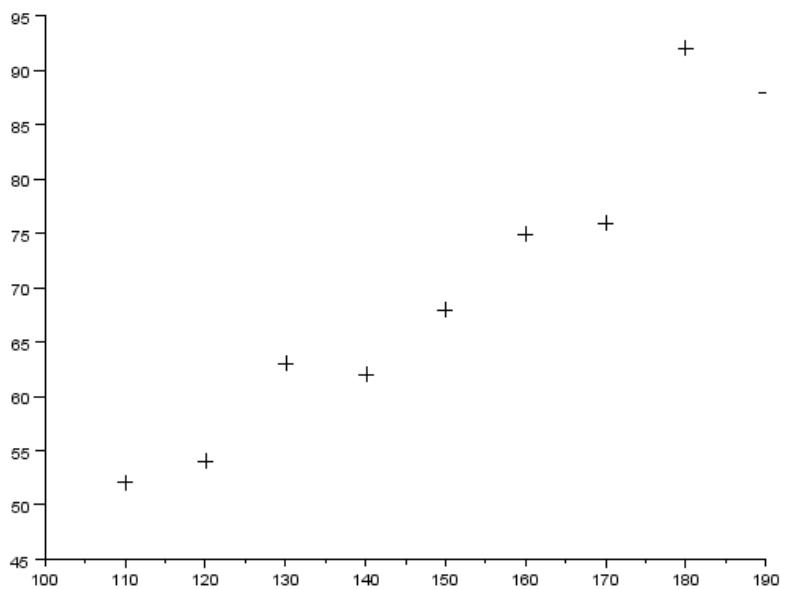


Figure 9.1: Scatter Diagram

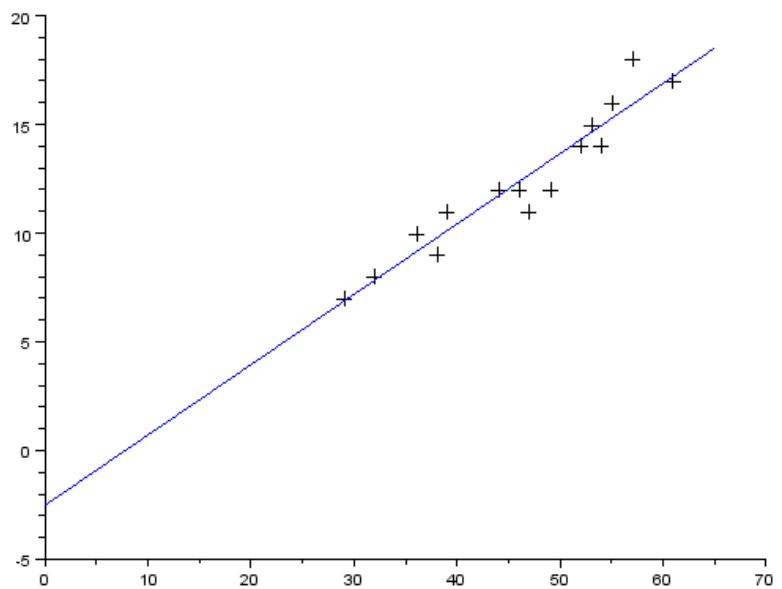


Figure 9.2: Relative humidity and moisture content

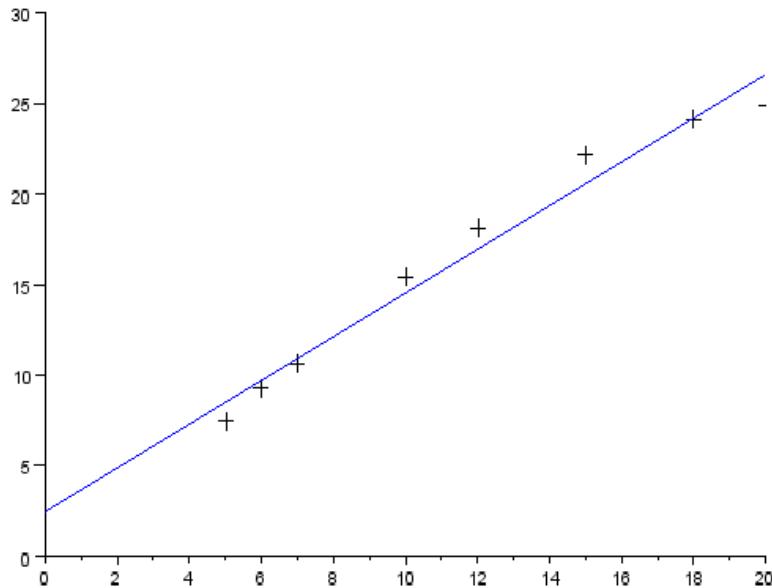


Figure 9.3: Moisture against Density

```
9 plot2d(p, q, 2);
```

---

### Scilab code Exa 9.3a Moisture against Density

```
1 x= [5 6 7 10 12 15 18 20];
2 y= [7.4 9.3 10.6 15.4 18.1 22.2 24.1 24.8];
3 plot2d(x,y,-1);
4
5 xbar = mean(x);
6 ybar= mean(y);
7 n= 8;
```

```

8 SxY = 0;
9 for i= 1:n
10     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
11 end
12
13 Sxx = 0;
14 for i=1:n
15     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
16 end
17 SYY = 0;
18 for i=1:n
19     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
20 end
21 B = SxY/Sxx;
22 A = ybar - (B*xbar);
23 disp(A, "A is");
24 disp(B, "B is");
25 p= 0:0.1: 20;
26 q= A + B*p;
27 plot2d(p,q,2);
28
29 SSR = ((Sxx*SYY)- (SxY*SxY))/Sxx ;
30 disp(SSR, "The SSR is")

```

---

### Scilab code Exa 9.4a Effect of speed on mileage

```

1 x= [45 50 55 60 65 70 75];
2 y= [24.2 25.0 23.3 22.0 21.5 20.6 19.8];
3 xbar = mean(x);
4 ybar= mean(y);
5 n= 7;
6 SxY = 0;
7 for i= 1:n
8     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
9 end

```

```

10
11 Sxx = 0;
12 for i=1:n
13     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
14 end
15 SYY = 0;
16 for i=1:n
17     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
18 end
19 B = SxY/Sxx;
20 A = ybar - (B*xbar);
21 //disp(A, "A is");
22 //disp(B, "B is");
23
24 SSR = ((Sxx*SYY) - (SxY*SxY))/Sxx ;
25 //disp(SSR, "The SSR is")
26 ts = sqrt(((n-2)*Sxx)/SSR)*abs(B);
27 disp(ts, "the test statistic is");
28 tvalue= cdft("T",5, 0.995, 0.005 );
29 //disp(tvalue, "tvalue is");
30 if(tvalue < ts)
31     disp("Hypothesis beta= 0 is rejected at 1% level
            of significance")
32 else
33     disp("Hypothesis beta= 0 is accepted at 1% level
            of significance")
34 end

```

---

### Scilab code Exa 9.4b Confidence interval estimate

```

1 x= [45 50 55 60 65 70 75];
2 y= [24.2 25.0 23.3 22.0 21.5 20.6 19.8];
3 xbar = mean(x);
4 ybar= mean(y);
5 n= 7;

```

```

6 SxY = 0;
7 for i= 1:n
8     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
9 end
10
11 Sxx = 0;
12 for i=1:n
13     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
14 end
15 SYY = 0;
16 for i=1:n
17     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
18 end
19 B = SxY/Sxx;
20 A = ybar - (B*xbar);
21 //disp(A, "A is");
22 //disp(B, "B is");
23
24 SSR = ((Sxx*SYY)-(SxY*SxY))/Sxx ;
25 //disp(SSR, "The SSR is")
26
27 tvalue= cdft("T",5, 0.975, 0.025 );
28 k = sqrt(SSR/((n-2)*Sxx))*tvalue;
29 int1 = B + k;
30 int2= B-k;
31 disp(int2, "to ", int1 , "The 95% confidence interval
   is " );

```

---

### Scilab code Exa 9.4c Regression to the mean

```

1 x= [60 62 64 65 66 67 68 70 72 74];
2 y= [63.6 65.2 66 65.5 66.9 67.1 67.4 68.3 70.1 70];
3 plot2d(x,y,-1);

```

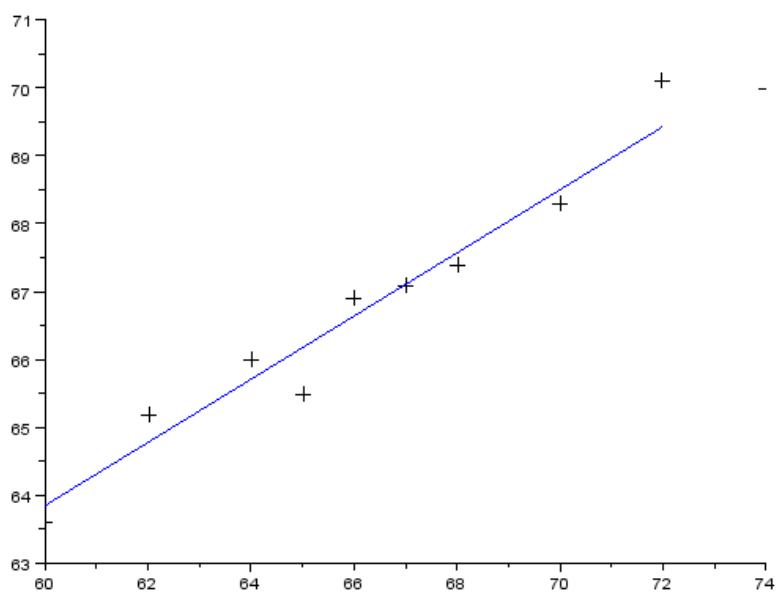


Figure 9.4: Regression to the mean

```

4 xbar = mean(x);
5 ybar= mean(y);
6 n= 10;
7 SxY = 0;
8 for i= 1:n
9     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
10 end
11
12 Sxx = 0;
13 for i=1:n
14     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
15 end
16 SYY = 0;
17 for i=1:n
18     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
19 end
20 B = SxY/Sxx;
21 A = ybar - (B*xbar);
22 //disp(A, "A is");
23 //disp(B, "B is");
24 p= 60:0.1: 72;
25 q= A + B*p;
26 plot2d(p,q,2);
27 SSR = ((Sxx*SYY)- (SxY*SxY))/Sxx ;
28 ts = sqrt(((n-2)*Sxx)/SSR)*(B-1)
29 //disp(ts);
30 tvalue= cdft("T",n-2, 0.99, 0.01 );
31 //disp(tvalue);
32 if(ts<(-1*tvalue))
33     disp(" Null hypotheis is rejected at 1% level of
            significance")
34 else
35     disp(" Null hypotheis is accepted at 1% level of
            significance")
36 end

```

---

### Scilab code Exa 9.4d Motor vehicle deaths

```
1 x= [121 96 85 113 102 118 90 84 107 112 95 101];
2 y= [104 91 101 110 117 108 96 102 114 96 88 106];
3
4 plot2d(x,y,-1);
5 xlabel("Deaths in 1988");
6 ylabel("Deaths in 1989");
7
8 xbar = mean(x);
9 ybar= mean(y);
10 n= 12;
11 SxY = 0;
12 for i= 1:n
13     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
14 end
15
16 Sxx = 0;
17 for i=1:n
18     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
19 end
20 SYY = 0;
21 for i=1:n
22     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
23 end
24 B = SxY/Sxx;
25 A = ybar - (B*xbar);
26 disp(A, "A is");
27 disp(B, "B is");
```

---

### Scilab code Exa 9.4e Confidence interval for height

```

1 x= [60 62 64 65 66 67 68 70 72 74];
2 y= [63.6 65.2 66 65.5 66.9 67.1 67.4 68.3 70.1 70];
3 x0 = 68;
4 xbar = mean(x);
5 ybar= mean(y);
6 n= 10;
7 SxY = 0;
8 for i= 1:n
9     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
10 end
11 //disp(SxY, "SxY is");
12 Sxx = 0;
13 for i=1:n
14     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
15 end
16 //disp(Sxx, "Sxx is");
17 SYY = 0;
18 for i=1:n
19     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
20 end
21 //disp(SYY, "SYY is");
22 B = SxY/Sxx;
23 A = ybar - (B*xbar);
24 tvalue= cdf("T",n-2, 0.975, 0.025 );
25 SSR = ((Sxx*SYY)- (SxY*SxY))/Sxx ;
26 //disp(tvalue, "tvalue is");
27 intvl = A + (B*x0);
28 //disp(intvl);
29 change = sqrt((1/n)+(((x0-xbar)^2)/Sxx))* sqrt(SSR/(n-2))*tvalue;
30 intvl1 = intvl - change;
31 intvl2= intvl + change;
32 disp(intvl2, "to ", intvl1 , "The 95% confidence
interval is " );

```

---

### Scilab code Exa 9.4f Confidence interval for height

```
1 x= [60 62 64 65 66 67 68 70 72 74];
2 y= [63.6 65.2 66 65.5 66.9 67.1 67.4 68.3 70.1 70];
3 x0 = 68;
4 xbar = mean(x);
5 ybar= mean(y);
6 n= 10;
7 SxY = 0;
8 for i= 1:n
9     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
10 end
11 //disp(SxY, "SxY is");
12 Sxx = 0;
13 for i=1:n
14     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
15 end
16 //disp(Sxx, "Sxx is");
17 SYY = 0;
18 for i=1:n
19     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
20 end
21 //disp(SYY, "SYY is");
22 B = SxY/Sxx;
23 A = ybar - (B*xbar);
24 tvalue= cdft("T",n-2, 0.975, 0.025 );
25 SSR = ((Sxx*SYY)- (SxY*SxY))/Sxx ;
26 //disp(tvalue , "tvalue is");
27 intvl = A + (B*x0);
28 //disp(intvl);
29 change = sqrt(((n+1)/n)+(((x0-xbar)^2)/Sxx))* sqrt(
    SSR/(n-2))*tvalue;
30 intvl1 = intvl - change;
31 intvl2= intvl + change;
32 disp(intvl2, "to ", intvl1 , "The 95% confidence
    interval is " );
```

---

### Scilab code Exa 9.5a Height of son and father

```
1 x= [60 62 64 65 66 67 68 70 72 74];
2 y= [63.6 65.2 66 65.5 66.9 67.1 67.4 68.3 70.1 70];
3
4 xbar = mean(x);
5 ybar= mean(y);
6 n= 10;
7 SxY = 0;
8 for i= 1:n
9     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
10 end
11
12 Sxx = 0;
13 for i=1:n
14     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
15 end
16 SYY = 0;
17 for i=1:n
18     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
19 end
20 B = SxY/Sxx;
21 A = ybar - (B*xbar);
22
23 SSR = ((Sxx*SYY)- (SxY*SxY))/Sxx ;
24 R2 = 1 - (SSR/SYY);
25 disp(R2, "The coefficient of determination is")
```

---

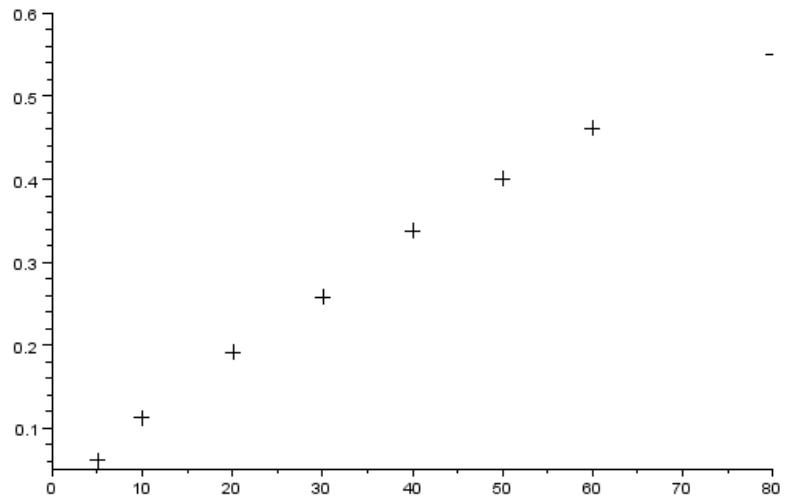


Figure 9.5: Percentage of chemical used

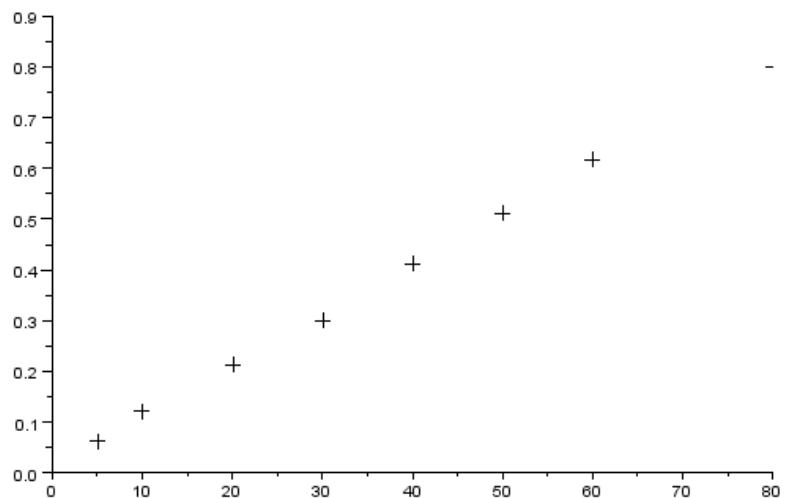


Figure 9.6: Percentage of chemical used

### Scilab code Exa 9.7a Percentage of chemical used

```
1 x= [5 10 20 30 40 50 60 80];
2 yold= [0.061 0.113 0.192 0.259 0.339 0.401 0.461
         0.551];
3 plot2d(x, yold, -1);
4 y = -1*log(1-yold);
5 scf(2);
6 plot2d(x, y, -1);
7
8
9 xbar = mean(x);
10 ybar= mean(y);
11 n= 8;
12 SxY = 0;
13 for i= 1:n
14     SxY = SxY + (x(i)*y(i)) - (xbar*ybar);
15 end
16
17 Sxx = 0;
18 for i=1:n
19     Sxx= Sxx + (x(i)*x(i)) - (xbar*xbar);
20 end
21 SYY = 0;
22 for i=1:n
23     SYY = SYY + (y(i)*y(i)) - (ybar*ybar);
24 end
25 B = SxY/Sxx;
26 A = ybar - (B*xbar);
27 //disp(A, "A is");
28 //disp(B, "B is");
29 SSR = ((Sxx*SYY)- (SxY*SxY))/Sxx ;
30 chat = exp(-1*A);
31 dhat = 1 - exp(-1*B);
32 disp(chat, "chat is");
33 disp(dhat, "dhat is");
```

---

### Scilab code Exa 9.8b Distance vs Travel Time

```
1 x = [0.5 1 1.5 2 3 4 5 6 8 10];
2 y= [15 15.1 16.5 19.9 27.7 29.7 26.7 35.9 42 49.4];
3 for i=1:10
4     w(i) = 1/x(i);
5 end
6 //disp(w)
7 n = 10;
8 p = zeros(2,2);
9 q = zeros(2, 1);
10 p(1, 1) = sum(w);
11 p(1,2) = n;
12 p(2,1) = n;
13 p(2,2) = sum(x);
14 for i=1:10
15     new(i) = w(i)*y(i)
16 end
17
18 q(1,1)= -1*sum(new);
19 q(2,1) = -1*sum(y);
20 //disp(p);
21 //disp(q);
22 sol = linsolve(p,q);
23 A = sol(1,1 );
24 B = sol(2,1);
25 disp(A, "A is");
26 disp(B, "B is");
```

---

### Scilab code Exa 9.9a Polynomial Fitting

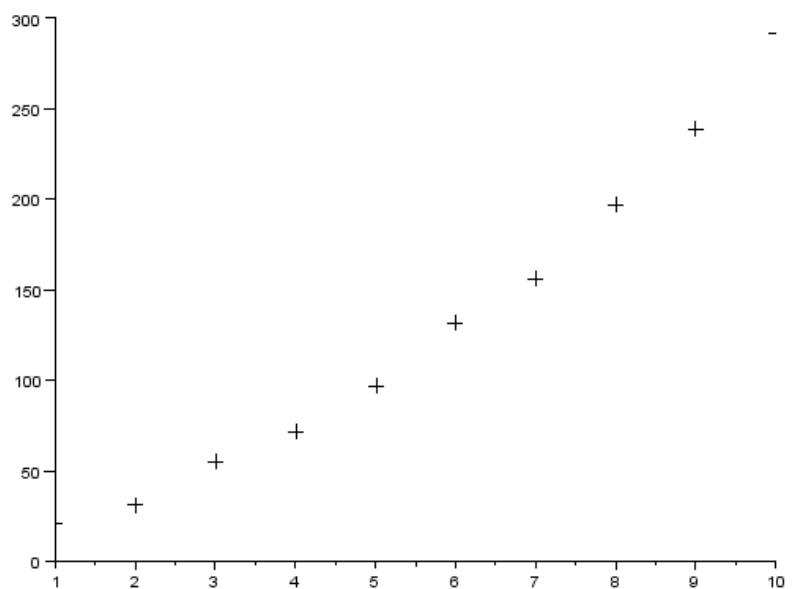


Figure 9.7: Polynomial Fitting

```

1 x = 1:1:10;
2 y= [20.6 30.8 55 71.4 97.3 131.8 156.3 197.3 238.7
      291.7];
3 plot2d(x, y, -1);
4 xlabel('X');
5 ylabel('Y');
6 n = length(x)
7 xsquared = x.^2;
8 xcube = x.^3;
9 xfour = x.^4;
10 xy = x.*y;
11 x2y = xy.*x;
12 p= zeros(3,3);
13 q = zeros(3,1);
14 p(1,1) = n;
15 p(1,2) = sum(x);
16 p(1,3)=sum(xsquared);
17 p(2,1) = sum(x);
18 p(2,2) = sum(xsquared);
19 p(2,3)=sum(xcube);
20 p(3,1) = sum(xsquared);
21 p(3,2) = sum(xcube);
22 p(3,3)=sum(xfour);
23 q(1,1)= -1*sum(y);
24 q(2,1) = -1*sum(xy);
25 q(3,1) = -1*sum(x2y);
26 B= linsolve(p, q);
27 disp(B(1,1), "B0 is");
28 disp(B(2,1), "B1 is");
29 disp(B(3,1), "B2 is");

```

---

### Scilab code Exa 9.10a Multiple Linear Regression

```

1 x1= [679 1420 1349 296 6975 323 4200 633];
2 x2 = [30.4 34.1 17.2 26.8 29.1 18.7 32.6 32.5];

```

```

3 y = ones(8,1);
4 y= [11.6 ;16.1; 9.3; 9.1; 8.4; 7.7; 11.3; 8.4];
5 x = ones(8,3);
6 for i=1:8
7     x(i,2)= x1(i);
8     x(i,3)= x2(i);
9 end
10
11 pro1 = x';
12 //disp(pro1);
13
14 pro2= pro1*x;
15 //disp(pro2);
16 pro3 = inv(pro2);
17 //disp(pro3);
18 pro4 = pro3*pro1;
19 pro5 = pro4*y;
20 //disp(pro4);
21 //disp(y);
22 B= ones(3,1);
23 for i=1:3
24     B(i,1)= 0;
25     for k=1:8
26         B(i,1)=B(i,1)+(pro4(i, k)*y(k, 1));
27     end
28 end
29 disp(B);
30 //SSR = y'*y - B'*x'y;
31 SSR = y';
32 SSR= SSR*y;
33 sub = B';
34 sub = sub*x';
35 sub= sub*y;
36 SSR =SSR - sub;
37 disp(SSR, "SSr is");

```

---

### Scilab code Exa 9.10b Estimate of variance

```
1 x1= [679 1420 1349 296 6975 323 4200 633];
2 x2 = [30.4 34.1 17.2 26.8 29.1 18.7 32.6 32.5];
3 y = ones(8,1);
4 n= 8;
5 k =2;
6 y= [11.6 ;16.1; 9.3; 9.1; 8.4; 7.7; 11.3; 8.4];
7 x = ones(8,3);
8 for i=1:8
9     x(i,2)= x1(i);
10    x(i,3)= x2(i);
11 end
12
13 pro1 = x';
14 //disp(pro1);
15
16 pro2= pro1*x;
17 //disp(pro2);
18 pro3 = inv(pro2);
19 //disp(pro3);
20 pro4 = pro3*pro1;
21 pro5 = pro4*y;
22 //disp(pro4);
23 //disp(y);
24 B= ones(3,1);
25 for i=1:3
26     B(i,1)= 0;
27     for k=1:8
28         B(i,1)=B(i,1)+(pro4(i, k)*y(k, 1));
29     end
30 end
31 //disp(B);
32 //SSR = y'*y - B'*x'y;
```

```

33 SSR = y';
34 SSR= SSR*y;
35 sub = B';
36 sub = sub*x';
37 sub= sub*y;
38 SSR =SSR - sub;
39 //disp(SSR, "SSr is");
40 k=2;
41 den = n-k-1;
42 disp(den)
43 sigma = SSR/den;
44 disp(sigma, "The variance is")

```

---

### Scilab code Exa 9.10c Diameter of a tree

```

1 x1 = [44 33 33 32 34 31 33 30 34 34 34 33 36 33 34 37];
2 x2= [1.3 2.2 2.2 2.6 2.0 1.8 2.2 3.6 1.6 1.5 2.2 1.7
      2.2 1.3 2.6];
3 x3 = [250 115 75 85 100 75 85 75 225 250 255 175 75
        85 90];
4 x4= [0.63 0.59 0.56 0.55 0.54 0.59 0.56 0.46 0.63
      0.60 0.63 0.58 0.55 0.57 0.62 ];
5 y = [18.1; 19.6; 16.6; 16.4; 16.9 ;17.0; 20.0; 16.6;
      16.2; 18.5 ; 18.7; 19.4; 17.6; 18.3; 18.8];
6 n =length(x1);
7 x= ones(15, 5);
8 for i=1:15
9     x(i,2)= x1(i);
10    x(i,3)= x2(i);
11    x(i,4)= x3(i);
12    x(i,5)= x4(i);
13 end
14 pro1 = x';
15 //disp(pro1);
16 pro2= pro1*x;

```

```

17 //disp (pro2);
18 pro3 = inv(pro2);
19 //disp (pro3);
20 pro4 = pro3*pro1;
21 pro5 = pro4*y;
22
23 for i=1:5
24     B(i,1)= 0;
25     for k=1:15
26         B(i,1)=B(i,1)+(pro4(i, k)*y(k, 1));
27     end
28 end
29 SSR = y';
30 SSR= SSR*y;
31 sub = B';
32 sub = sub*x';
33 sub= sub*y;
34 SSR =SSR - sub;
35 //disp (SSR);
36 //disp (B(2))
37 xxinv = 0.379;
38 k= 4;
39 ts = sqrt((n-k-2)/SSR)*B(2)/0.616;
40 pvalue = 2*(1- cdft("PQ",ts, n-k-2));
41 disp(pvalue, "The p-value is")
42
43 //The SSR calculated by scilab is 19.34 whereas the
    textbook gives the value as 19.26 , thus the
    difference in the final answer.

```

---

### Scilab code Exa 9.10d Estimating hardness

```

1 y=[79.2 ;64.0; 55.7; 56.3; 58.6; 84.3; 70.4; 61.3;
   51.3; 49.8];
2 x1 = [0.02 0.03 0.03 0.04 0.10 0.15 0.15 0.09 0.13

```

```

    0.09];
3 x2 = [1.05 1.20 1.25 1.30 1.30 1.00 1.10 1.20 1.40
        1.40];
4 tvalue= 2.365;
5 x = ones(10,3);
6 for i=1:10
7     x(i,2)= x1(i);
8     x(i,3)= x2(i);
9 end
10
11 pro1 = x';
12 //disp(pro1);
13
14 pro2= pro1*x;
15 //disp(pro2);
16 pro3 = inv(pro2);
17 //disp(pro3);
18 pro4 = pro3*pro1;
19 pro5 = pro4*y;
20 //disp(pro4);
21 //disp(y);
22 B= ones(3,1);
23 for i=1:3
24     B(i,1)= 0;
25     for k=1:10
26         B(i,1)=B(i,1)+(pro4(i, k)*y(k, 1));
27     end
28 end
29 //disp(B);
30 //SSR = y'*y - B'*x'y;
31 SSR = y';
32 SSR= SSR*y;
33 sub = B';
34 sub = sub*x';
35 sub= sub*y;
36 SSR =SSR - sub;
37 disp(SSR, "SSr is");
38 smallx = [1, 0.15, 1.15];

```

```
39 product = smallx * B;
40 //disp(product);
41 n = 10;
42 k=2;
43 val= sqrt(SSR/(n-k-1));
44 //disp(val);
45
46 pro5 = smallx * pro3;
47 pro6 = pro5* smallx';
48 pro7 = val*sqrt(pro6)*tvalue;
49 //disp(pro7)
50 up = product + pro7;
51 low = product - pro7;
52 disp(" 95% confidence interval is from ");
53 disp(up, "to", low);
```

---

### Scilab code Exa 9.11a Animal fsickalling

```
1 cancer = 84;
2 total = 111;
3 level = 250;
4 alpha= -1*log((total-cancer)/total)/level;
5 disp(alpha , "Alpha is ")
```

---

# Chapter 10

## Analysis of Variance

Scilab code Exa 10.3a Dependence of mileage on gas used

```
1 Xij = [220 251 226 246 260; 244 235 232 242 225; 252  
272 250 238 256];  
2 Xi = zeros(3,1);  
3 n= 5;  
4 m=3;  
5 for i=1:3  
6     for j=1:5  
7         Xi(i)= Xi(i) + Xij(i,j);  
8     end  
9 end  
10 Xi = Xi/n;  
11 SSW= 0;  
12 for i=1:3  
13     for j= 1:5  
14         SSW = SSW + ((Xij(i,j)-Xi(i))^2)  
15     end  
16 end  
17 sigma1 = SSW/((n*m)-m);  
18 Xdotdot = sum(Xi)/m;  
19 new = (Xi - Xdotdot)^2;  
20 SSb= n*sum(new);
```

```

21 sigma2 = SSb/(m-1);
22 TS = sigma2/sigma1;
23 //disp(sigma1);
24 //disp(sigma2);
25 disp(TS, "Value of the test statistic is");
26 pvalue = 1 - cdff("PQ", TS,m-1, ((n*m)-m) );
27 disp(pvalue, "The p-value is")
28 if(pvalue>0.05)
29 disp( "Since the p-value is greater than .05, the
        null hypothesis that the mean mileage is the same
        for all 3 brands of gasoline cannot be rejected .
      ")
30 end

```

---

### Scilab code Exa 10.3b Dependence of mileage on gas used

```

1 Xijold = [220 251 226 246 260; 244 235 232 242 225;
            252 272 250 238 256];
2 Xij = Xijold - 220;
3 m=3;
4 n=5;
5 Xidot = zeros(3,1);
6 for i=1:m
7     for j=1:n
8         Xidot(i)=Xidot(i) + Xij(i,j);
9     end
10 end
11 Xidot = Xidot/n;
12 Xdotdot = sum(Xidot)/m;
13 SSb=0;
14 for i=1:m
15     SSb = SSb + (Xidot(i)-Xdotdot)^2;
16 end
17 SSb = SSb*n;
18 Xij squared = Xij.^2;

```

```

19 SSW = sum(Xij squared) - (m*n*(Xdotdot^2)) - SSb;
20 sigma1 = SSW/((n*m)-m);
21 sigma2 = SSb/(m-1);
22 TS = sigma2/sigma1;
23 disp(TS, "Value of the test statistic is");

```

---

### Scilab code Exa 10.3c Difference in GPA

```

1 Xij = [3.2 3.4 3.3 3.5; 3.4 3.0 3.7 3.3; 2.8 2.6 3.0
         2.7];
2 Xi = zeros(3,1);
3 n= 4;
4 m=3;
5 for i=1:3
6     for j=1:4
7         Xi(i)= Xi(i) + Xij(i,j);
8     end
9 end
10 Xi = Xi/n;
11 SSW= 0;
12 for i=1:3
13     for j= 1:4
14         SSW = SSW + ((Xij(i,j)-Xi(i))^2)
15     end
16 end
17 sigma1 = SSW/((n*m)-m);
18 Xdotdot = sum(Xi)/m;
19 new = (Xi - Xdotdot)^2;
20 SSb= n*sum(new);
21 sigma2 = SSb/(m-1);
22 TS = sigma2/sigma1;
23 //disp(sigma1);
24 //disp(sigma2);
25 disp(TS, "Value of the test statistic is");
26 pvalue = 1 - cdf("PQ", TS,m-1, ((n*m)-m));

```

```

27 disp(pvalue, "The p-value is")
28 C = 3.95; //from table A5
29 W = C*sqrt(SSW/(9*4));
30 disp(W);
31 disp(Xi(1)-Xi(2)+W , "and ", Xi(1)-Xi(2)-W, "Mean1 -
    Mean2 lies between ");
32 disp(Xi(1)-Xi(3)+W , "and ", Xi(1)-Xi(3)-W, "Mean1 -
    Mean3 lies between ");
33 disp(Xi(2)-Xi(3)+W , "and ", Xi(2)-Xi(3)-W, "Mean2 -
    Mean3 lies between ");

```

---

### Scilab code Exa 10.4b Estimating Parameters

```

1 X=[75 73 60 70 86; 78 71 64 72 90; 80 69 62 70 85;
     73 67 63 80 92 ];
2 Xidot = zeros(4,1);
3 for i=1:4
4     for j=1:5
5         Xidot(i)=Xidot(i) + X(i,j);
6     end
7 end
8 Xidot = Xidot/5;
9 Xjdot = zeros(5,1);
10 for j=1:5
11     for i=1:4
12         Xjdot(j)=Xjdot(j) + X(i,j);
13     end
14 end
15 Xjdot = Xjdot/4;
16 Xdotdot = sum(Xidot)/4;
17 //disp(Xdotdot)
18 meanhat = Xdotdot;
19 alphahat = Xidot - meanhat;
20 betahat = Xjdot - meanhat;
21 disp(meanhat, "The estimator of the mean is");

```

```
22 disp("The alphas are—")
23 disp(alphahat)
24 disp("The betas are—")
25 disp(betahat)
```

---

### Scilab code Exa 10.5a Species collected

```
1 X = [53 35 31 37 40 43; 36 34 17 21 30 18; 47 37 17
      31 45 26; 55 31 17 23 43 37; 40 32 19 26 45 37;
      52 42 20 27 26 32; 39 28 21 21 36 28; 40 32 21 21
      36 35];
2 m= 8;
3 n = 6;
4 Xidot = zeros(8,1);
5 for i=1:8
6     for j=1:6
7         Xidot(i)=Xidot(i) + X(i,j);
8     end
9 end
10 Xidot = Xidot/6;
11 Xjdot = zeros(6,1);
12 for j=1:6
13     for i=1:8
14         Xjdot(j)=Xjdot(j) + X(i,j);
15     end
16 end
17 Xjdot = Xjdot/8;
18 Xdotdot = sum(Xidot)/8;
19 new = (Xidot - Xdotdot)^2;
20 SSr = n*sum(new);
21 new1 = (Xjdot - Xdotdot)^2;
22 SSC = m*sum(new1);
23 SSE = 0;
24 for i=1:m
25     for j=1:n
```

```

26         SSe = SSe + (X(i,j)-Xidot(i)-Xjdot(j)+  

27             Xdotdot)^2;  

28     end  

29 end  

29 N =(m-1)*(n-1);  

30 TS1 = SSr*N/((m-1)*SSe);  

31 TS2 = SSC*N/((n-1)*SSe);  

32 pvaluec = 1- cdff("PQ", TS1, m-1, N);  

33 pvaluer = 1- cdff("PQ", TS2, n-1, N);  

34 //disp(pvaluer, pvaluec);  

35 //disp(TS1, TS2);  

36 disp(TS1, "The value of the F-statistic for testing  

            that there is no row effect is");  

37 disp(pvaluec, "The p-value for testing that there is  

            no row effect is");  

38  

39 disp(TS2, "The value of the F-statistic for testing  

            that there is no column effect is");  

40 disp(pvaluer, "The p-value for testing that there is  

            no column effect is");

```

---

# Chapter 11

## Goodness of Fit Tests and Categorical Data Analysis

Scilab code Exa 11.2a Relation between death date and birth date

```
1 X = [90 100 87 96 101 86 119 118 121 114 113 106];
2 pi= ones(12,1);
3 pi= pi/12;
4 new = X.^2;
5 npi= sum(X)*pi;
6 T = sum(new);
7 T = T/npi;
8 T = T - sum(X);
9 disp("When there are 12 regions")
10 disp(T(1), "The test statistic is")
11 pvalue = 1- cdfchi("PQ",T(1), 11);
12 disp(pvalue, "The pvalue is ")
13
14 X = [277 283 358 333];
15 pi= ones(4,1);
16 pi= pi/4;
17 new = X.^2;
18 npi= sum(X)*pi;
19 T = sum(new);
```

```
20 T = T/np;
21 T = T - sum(X);
22 disp("When there are 4 regions")
23 disp(T(1), "The test statistic is")
24 pvalue = 1- cdfchi("PQ",T(1), 3);
25 disp(pvalue, "The pvalue is ")
```

---

### Scilab code Exa 11.2b Quality of bulbs

```
1 X = [3 6 9 7 5];
2 p= [0.15 0.25 0.35 0.20 0.05];
3 T= 0;
4 n3=sum(X);
5 np = p*n3;
6 Xsqu = (X-np).^2;
7 disp(Xsqu);
8 XT = Xsqu./np;
9 T = sum(XT);
10
11 //T = T - sum(X);
12 //disp("When there are 12 regions")
13 disp(T, "The test statistic is")
14 pvalue = 1- cdfchi("PQ",T(1), 4);
15 //a= cdfchi("PQ",T(1), 4);
16
17 disp(pvalue, "The pvalue is ")
18 disp("Thus, the hypothesis would not be rejected at
      5% level of significance")
```

---

### Scilab code Exa 11.2d Six outcomes

```
1 X = [3 3 5 18 4 7];
2 p= [0.1 0.1 0.05 0.4 0.2 0.15];
```

```

3 psimu = 0.1843; //p-value obtained by simulation
4 num= 10000;
5 T= 0;
6 n=sum(X);
7 np = n*p;
8 Xsqu = X.^2;
9 for i= 1:6
10     T = T + (Xsqu(i)/np(i));
11 end
12 T = T - sum(X);
13
14 disp(T(1), "The test statistic is")
15 pvalue = 1- cdfchi("PQ",T(1), 5);
16 //disp(pvalue, "The pvalue is ")
17 int1 = psimu - (1.645*sqrt(psimu*(1-psimu)/num));
18 int2 = psimu + (1.645*sqrt(psimu*(1-psimu)/num));
19 disp("With 90% confidence p-value lies between ")
20 disp(int1)
21 disp("and")
22 disp(int2);

```

---

### Scilab code Exa 11.3a Weekly accidents

```

1 Y = [8 0 0 1 3 4 0 2 12 5 1 8 0 2 0 1 9 3 4 5 3 3 4
      7 4 0 1 2 1 2];
2 weeks = 30;
3 lamda = sum(Y)/weeks;
4 p = zeros(5,1);
5 p(1) = cdfpoi("PQ", 0, lamda);
6 p(2) = cdfpoi("PQ", 1, lamda) - p(1);
7 p(3) = cdfpoi("PQ", 3, lamda) - cdfpoi("PQ", 1,
      lamda);
8 p(4) = cdfpoi("PQ", 5, lamda) - cdfpoi("PQ", 3,
      lamda);
9 p(5) = 1 - cdfpoi("PQ", 5, lamda);

```

```

10 // disp(p);
11 X = zeros(5,1);
12 for i=1:30
13     if(Y(i)==0)
14         X(1) = X(1) +1;
15     end
16     if(Y(i)==1)
17         X(2) = X(2) +1;
18     end
19     if(Y(i)==2)
20         X(3) = X(3) +1;
21     end
22     if(Y(i)==3)
23         X(3) = X(3) +1;
24     end
25     if(Y(i)==4)
26         X(4) = X(4) +1;
27     end
28     if(Y(i)==5)
29         X(4) = X(4) +1;
30     end
31     if(Y(i)>5)
32         X(5) = X(5) +1;
33     end
34 end
35 // disp(X);
36 T= 0;
37 npi = weeks * p;
38 for i=1:5
39     T = T + ((X(i)-npi(i))^2)/npi(i);
40 end
41 disp(T, "T is");
42 pvalue = 1- cdfchi("PQ", T, 3);
43 disp(pvalue, "The p-value is")
44 disp("Hypothesis of an underlying poisson
distribution is rejected")

```

---

### Scilab code Exa 11.4a Ploitical affiliation and Gender

```
1 Nij = [68 56 32; 52 72 20];
2 n= sum(Nij);
3 Ni = zeros(2,1);
4 Mj = zeros(3,1);
5 for i= 1:2
6     for j= 1:3
7         Ni(i) = Ni(i) + Nij(i,j);
8     end
9 end
10 for j= 1:3
11     for i= 1:2
12         Mj(j) = Mj(j) + Nij(i,j);
13     end
14 end
15 NM = ones(2,3);
16 for i=1:2
17     for j=1:3
18         NM(i,j)= Ni(i)*Mj(j);
19     end
20 end
21 NM= NM/n;
22 //disp (NM);
23 TS = 0
24 for i=1:2
25     for j= 1:3
26         TS = TS + ((Nij(i,j)-NM(i,j))^2)/NM(i,j);
27     end
28 end
29 disp(TS, "The test statistic is")
30 compare = cdfchi("X", 2, 0.95, 0.05);
31 //disp (compare)
32 if(TS>compare)
```

```

33     disp("The null hypothesis is rejected at the 5%
       level of significance");
34 else
35     disp("The null hypothesis is accepted at the 5%
       level of significance");
36 end

```

---

### Scilab code Exa 11.4b Machine Breakdown and shift

```

1 Nij = [68 56 32; 52 72 20];
2 n3= sum(Nij);
3 Ni = zeros(2,1);
4 Mj = zeros(3,1);
5 for i= 1:2
6     for j= 1:3
7         Ni(i) = Ni(i) + Nij(i,j);
8     end
9 end
10 for j= 1:3
11     for i= 1:2
12         Mj(j) = Mj(j) + Nij(i,j);
13     end
14 end
15 NM = ones(2,3);
16 for i=1:2
17     for j=1:3
18         NM(i,j)= Ni(i)*Mj(j);
19     end
20 end
21 NM= NM/n3;
22 //disp (NM);
23 TS = 0
24 for i=1:2
25     for j= 1:3
26         TS = TS + ((Nij(i,j)-NM(i,j))^2)/NM(i,j);

```

```

27     end
28 end
29 disp(TS, "The test statistic is")
30 compare = cdfchi("X", 2, 0.95, 0.05);
31 //disp(compare)
32 if(TS>compare)
33     disp("The null hypothesis is rejected at the 5%
           level of significance");
34 else
35     disp("The null hypothesis is accepted at the 5%
           level of significance");
36 end

```

---

### Scilab code Exa 11.5a Lung cancer and smoking

```

1 Nij = [62 14; 9938 19986];
2 n= sum(Nij);
3 Ni = zeros(2,1);
4 Mj = zeros(2,1);
5 for i= 1:2
6     for j= 1:2
7         Ni(i) = Ni(i) + Nij(i,j);
8     end
9 end
10 for j= 1:2
11     for i= 1:2
12         Mj(j) = Mj(j) + Nij(i,j);
13     end
14 end
15 NM = ones(2,2);
16 for i=1:2
17     for j=1:2
18         NM(i,j)= Ni(i)*Mj(j);
19     end
20 end

```

```

21 NM= NM/n;
22 disp(NM);
23 TS = 0
24 for i=1:2
25     for j= 1:2
26         TS = TS + ((Nij(i,j)-NM(i,j))^2)/NM(i,j);
27     end
28 end
29 disp(TS, "The test statistic is")
30 compare = cdfchi("X", 1, 0.99, 0.01);
31 //disp(compare)
32 if(TS>compare)
33     disp("The null hypothesis is rejected at the 5%
           level of significance");
34 else
35     disp("The null hypothesis is accepted at the 5%
           level of significance");
36 end

```

---

### Scilab code Exa 11.5b Females reporting abuse

```

1 Nij = [28 30 58 55; 472 470 442 445];
2 n= sum(Nij);
3 Ni = zeros(2,1);
4 Mj = zeros(4,1);
5 for i= 1:2
6     for j= 1:4
7         Ni(i) = Ni(i) + Nij(i,j);
8     end
9 end
10 for j= 1:4
11     for i= 1:2
12         Mj(j) = Mj(j) + Nij(i,j);
13     end
14 end

```

```

15 NM = ones(2,4);
16 for i=1:2
17     for j=1:4
18         NM(i,j)= Ni(i)*Mj(j);
19     end
20 end
21 NM= NM/n;
22 // disp(NM);
23 TS = 0
24 for i=1:2
25     for j= 1:4
26         TS = TS + ((Nij(i,j)-NM(i,j))^2)/NM(i,j);
27     end
28 end
29 disp(TS, "The test statistic is")
30 compare = cdfchi("X", 3, 0.99, 0.01);
31 pvalue = 1- cdfchi("PQ", TS, 3);
32 disp(pvalue, "The p-value is")
33 // disp(compare)
34 if(TS>compare)
35     disp("The null hypothesis is rejected at the 1%
            level of significance");
36 else
37     disp("The null hypothesis is accepted at the 5%
            level of significance");
38 end

```

---

### Scilab code Exa 11.6a Testing distribution of a population

```

1 X= [66 72 81 94 112 116 124 140 145 155];
2 D= 0.4831487;
3 n= 10;
4 Dgiven = 1.480;
5 Dstar = (sqrt(n) + 0.12 + (0.11/sqrt(n)))*D;
6 disp(Dstar, "Dstar is ");

```

```
7 if(Dstar>Dgiven)
8     disp("Null hypothesis is rejected at 2.5% level
9      of significance")
10    else
11        disp("Null hypothesis is accepted at 2.5% level
12          of significance")
13    end
```

---

# Chapter 12

## Non parametric Hypothesis Tests

Scilab code Exa 12.2a testing the median

```
1 n= 200;
2 v = 120;
3 p =0.5;
4 if(v < (n/2))
5     pvalue = 2*cdfbin("PQ", v, n, p,1-p);
6 else
7     pvalue = 2*cdfbin("PQ", n-v, n, p,1-p);
8
9 end
10 disp(pvalue, "Pvalue is ");
```

---

Scilab code Exa 12.2b testing the median

```
1 n= 80;
2 v = 28;
3 p =0.5;
```

```
4
5      pvalue = cdfbin("PQ", v, n, p,1-p);
6 disp(pvalue, "Pvalue is ");
7 disp("Thus, the null hypothesis that the median
     income is less than or equal to $90,000 is
     rejected")
```

---

### Scilab code Exa 12.3b Signed Rank Test

```
1 n =4;
2 mo = 2;
3 X = [4.2 1.8 5.3 1.7];
4 t =3;
5 tstar= min(t, (n*(n+1)/2) - t);
6 P = zeros(4,4);
7 P(1,1)= 0.5;
8 P(1,2) = 1;
9 P(1,3) = 1;
10 P(1,4) = 1;
11 for i=2:4
12     for j = 1:4
13         if (j-i <1)
14             P(i,j) = 0.5*P(i-1, j);
15             //disp(j,i);
16             //disp(P(i,j))
17
18         else
19             P(i,j) = 0.5*(P(i-1,j-i)+P(i-1,j));
20         end
21     end
22 end
23 disp(P)
```

---

### Scilab code Exa 12.3c Determining Population Distribution

```
1 n =20;
2 t =142;
3 tstar= min(t, (n*(n+1)/2) - t);
4 P = ones(20,tstar+1);
5 P(1,1)= 0.5;
6 P(1,2) = 1;
7 for i=2:20
8     for j = 1:tstar+1           if (j-i <1)
9         P(i,j) = 0.5*P(i-1, j);
10        //disp(j,i);
11        //disp(P(i,j))
12
13    else
14        P(i,j) = 0.5*(P(i-1,j-i)+P(i-1,j));
15    end
16 end
17 end
18 //disp(P)
19 pvalue= 2*P(20,tstar+1);
20 disp(pvalue, "Pvalue is")
```

---

### Scilab code Exa 12.4a Treatments against corrosion

```
1 X= [65.2 67.1 69.4 78.2 74 80.3];
2 Y = [59.4 72.1 68 66.2 58.5];
3 Z = [X Y];
4 Z = gsort(Z, 'g', 'i');
5 [m n]= size(X);
6 [p q] = size(Z)
7 T = 0;
8 for i=1:n
9     test = X(i);
10    for j =1 : q
```

```

11      if(test== Z(j))
12          T = T+ j;
13      end
14  end
15 end
16 disp(T, "The test statistic is ")

```

---

### Scilab code Exa 12.4b Determining P

```

1 function result= prob(N, M, K)
2     if(N==1 & M==0)
3         if(K >0)
4             result = 1;
5         else
6             result =0;
7         end
8
9     elseif (N==0 & M==1)
10        if(K <0)
11            result = 0;
12        else
13            result =1;
14        end
15    elseif (N==0 & M==0 &K==0)
16        result =1;
17    else
18        result = (prob(N-1, M, K-N-M)*N/(N+M)) + (
19            prob(N, M-1, K)*M/(N+M));
20        //result = prob(N-1, M, K-N-M)*N/(N+M) +
21        prob(N, M-1, K);
22        //result = result + prob(N, M-1, K);
23    end
24 endfunction
25
26 function result =pval(n,m,t)

```

```
25     result = 2*min(prob(n,m,t), 1-prob(n,m,t-1));
26 endfunction
```

---

#### Scilab code Exa 12.4c Finding p value

```
1 ans = pval(5,6,21);
2 disp(ans)
```

---

#### Scilab code Exa 12.4d Comparing production methods

```
1 ans = pval(9,13,72);
2 disp(ans)
```

---

#### Scilab code Exa 12.4e Determining p value

```
1 n1 =5;
2 m1= 6;
3
4 t1 =21;
5 num1 = n1*(n1+m1+1)/2;
6 d1=abs(t1 - num1);
7 val = d1/sqrt(n1*m1*(n1+m1+1)/12);
8 //disp(d1, "d is")
9 //disp(val, "val is")
10 pval = 2*(1-cdfnor("PQ", val, 0,1));
11 disp(pval, "The p-value for eg 12.4a is")
12 n2 =9;
13 m2= 13;
14 t2 =72;
15 d2=abs(t2 - n2*(n2+m2+1)/2);
```

```

16
17 val = d2/sqrt(n2*m2*(n2+m2+1)/12);
18 pval = 2*(1-cdfnor("PQ", val, 0,1));
19 disp(pval, "The p-value for eg 12.4d is")

```

---

### Scilab code Exa 12.5a Testing randomness

```

1 function result= fact(num)
2     if(num<=0)
3         result= 1
4     else
5         result = factorial(num)
6     end
7 endfunction
8 function result = proba(n,m,k)
9     if(pmodulo(k,2)==0)
10        k=k/2;
11        result = 2*fact(m-1)*fact(n-1)*fact(n)*fact(
12            m)/(fact(k-1)^2*fact(m-k)*fact(n-k)*fact(
13            n+m));
14    else
15        k = (k-1)/2;
16        result = fact(m-1)*fact(n-1)*fact(n)*fact(m)
17            /(fact(k-1)*fact(k)*fact(m-k)*fact(n-k
18            -1)*fact(n+m)) + fact(m-1)*fact(n-1)*
19            fact(n)*fact(m)/(fact(k-1)*fact(k)*fact(
20            m-k-1)*fact(n-k)*fact(n+m));
21    end
22 endfunction
23
24 r1 = 20;
25 n1 = 20;
26 m1=10;
27 ans1 =0;
28 for i=1:19

```

```
23     ans1 =ans1 + proba(n1,m1,i);
24     //disp(proba(n,m,i));
25     //disp(ans1)
26 end
27 if(ans1<0.5)
28     pvalue1 = 2*ans1;
29 else
30     pvalue1 = 2*(1-ans1);
31 end
32 disp(pvalue1, "P-value is")
```

---

### Scilab code Exa 12.5c Determining p value

```
1 u = 61;
2 sigma = 5.454;
3 r =75;
4 val = cdfnor("PQ", (r-u)/sigma, 0,1);
5 if(val>0.5)
6     pvalue = 2*(1-val);
7 else
8     pvalue = 2*val;
9 end
10 disp(pvalue, "P-value is");
```

---

# Chapter 13

## Quality Control

Scilab code Exa 13.2a Steel shaft diameter

```
1 X = [3.01 2.97 3.12 2.99 3.03 3.02 3.10 3.14 3.09  
      3.20];  
2 Y = 1:1:10;  
3 u = 3;  
4 sigma = 0.1;  
5 n=4;  
6 ucl = u + (3*sigma/sqrt(n));  
7 lcl = u - (3*sigma/sqrt(n));  
8 Z= 0.1:0.1:10;  
9 P= ones(1,100);  
10 Q= ones(1,100);  
11 P =P*ucl;  
12 Q =Q*lcl;  
13 plot2d(Y, X, -2);  
14 plot2d(Z, P, 1);  
15 plot2d(Z, Q, 1);  
16 //disp(size(Z));  
17 //disp(size(P));  
18 disp(ucl, 'ucl is');  
19 disp(lcl, 'lcl is')
```

---

### Scilab code Exa 13.2b unknown mean and variance

```
1 Xbar = [3.01 2.97 3.12 2.99 3.03 3.02 3.10 3.14 3.09  
3.20];  
2 S = [0.12 0.14 0.08 0.11 0.09 0.08 0.15 0.16 0.13  
0.16];  
3 c = [0.7978849 0.8862266 0.9213181 0.9399851  
0.9515332 0.9593684 0.9650309 0.9693103  
0.9726596];  
4 n=4;  
5 Xbarbar= mean(Xbar);  
6 Sbar =mean(S);  
7 lcl = Xbarbar - (3*Sbar/(sqrt(n)*c(n-1)));  
8 ucl = Xbarbar + (3*Sbar/(sqrt(n)*c(n-1)));  
9 //disp(lcl , "LCL is")  
10 //disp(ucl , "UCL is")  
11 u = Xbarbar;  
12 sigma= Sbar/c(n-1);  
13 //disp(u);  
14 //disp(sigma);  
15 //disp(Sbar , c(4));  
16 prob = cdfnor("PQ" , 3.1 , u , sigma) - cdfnor("PQ" ,  
2.9 , u , sigma);  
17 disp(prob*100 , "Percentage of the items that will  
meet the specifications is")
```

---

### Scilab code Exa 13.3a determining control limits

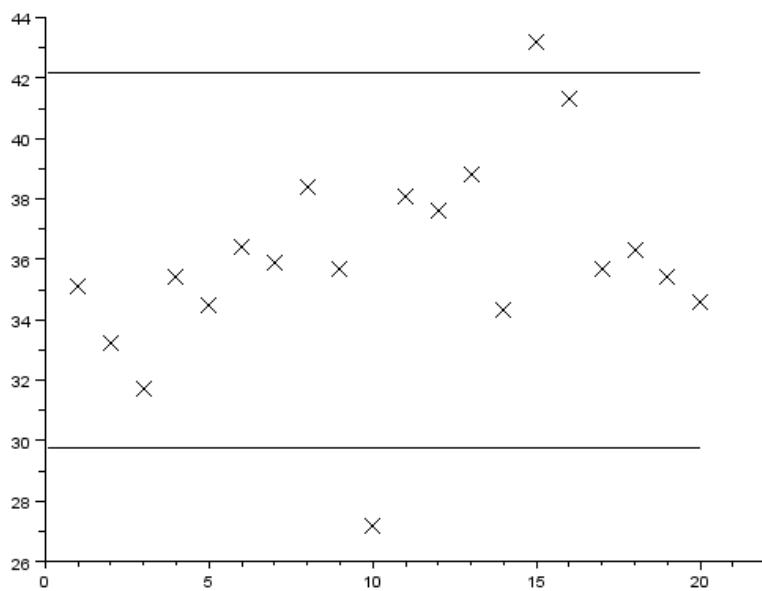


Figure 13.1: determining control limits

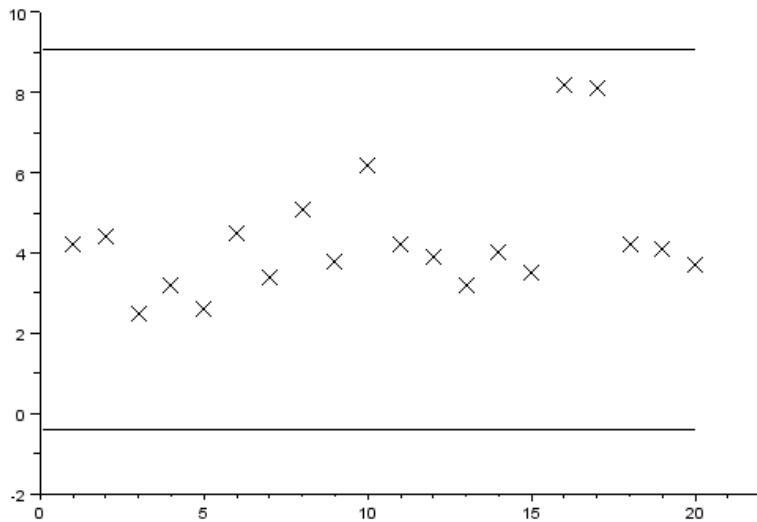


Figure 13.2: determining control limits

```

1 Xbar = [35.1 33.2 31.7 35.4 34.5 36.4 35.9 38.4
          35.7 27.2 38.1 37.6 38.8 34.3 43.2 41.3 35.7 36.3
          35.4 34.6];
2 S = [4.2 4.4 2.5 3.2 2.6 4.5 3.4 5.1 3.8 6.2 4.2 3.9
          3.2 4 3.5 8.2 8.1 4.2 4.1 3.7];
3 c = [0.7978849 0.8862266 0.9213181 0.9399851
          0.9515332 0.9593684 0.9650309 0.9693103
          0.9726596];
4 Y = 1:1:20;
5 n = 5;
6 Z= 0.1:0.1:20;
7 Xbarbar = mean(Xbar);
8 Sbar = mean(S);
9 lclX = Xbarbar - (3*Sbar/(sqrt(n)*c(n-1)));
10 uclX = Xbarbar + (3*Sbar/(sqrt(n)*c(n-1)));
11 val1 = 1/c(n-1);
12 val1 = val1^2;
13 val1 = val1 - 1;

```

```

14 val = sqrt(val1);
15 //val = sqrt((1/c(n-1)^2)) - 1;
16 ucls = Sbar*(1+(3*val));
17 lcls = Sbar*(1-(3*val));
18 //disp(ucls, lcls)
19 plot2d(Y, Xbar, -2);
20 P= ones(1, 200);
21 Q = ones(1, 200);
22 P= P*lclX;
23 Q=Q*uclX;
24 disp(uclX, 'UCL(X)=');
25 disp(lclX, 'LCL(X)=');
26 plot2d(Z, P, 1);
27 plot2d(Z, Q, 1);
28 title('Control Chart for X')
29 scf(2);
30 disp(uclX, 'UCL(S)=');
31 disp(lclX, 'LCL(S)=');
32 //disp(ucls, lcls)
33 plot2d(Y, S, -2);
34 P= P*lcls/lclX;
35 Q=Q*ucls/uclX;
36 plot2d(Z, P, 1);
37 plot2d(Z, Q, 1);
38 title('Control Chart for S')

```

---

### Scilab code Exa 13.4a Defectives Screws

```

1 defect = [6 5 3 0 1 2 1 0 2 1 1 3 2 0 1 1 0 2 1 2];
2 F = [0.12 0.10 0.06 0.00 0.02 0.04 0.02 0.00 0.04
       0.02 0.02 0.06 0.04 0.00 .02 0.02 0.00 0.04 0.02
       0.04];
3 total = 1000;
4 Fbar = sum(defect)/total;
5 n=50;

```

```

6 val = sqrt(Fbar*(1-Fbar)/n);
7 lcl = Fbar - (3*val);
8 ucl = Fbar + (3*val);
9 disp(lcl,"LCL is" );
10 disp(ucl, "UCL is");
11 for i= 1:20
12     if( F(i)>ucl | F(i)<lcl)
13         totald=sum(defect)-defect(i);
14         //total = total -50;
15     end
16 end
17 //disp(totald);
18 total = total - 50;
19 Fbar = totald/total;
20 val = sqrt(Fbar*(1-Fbar)/n);
21 //disp(Fbar);
22 disp(" After recomputation");
23 lcl = Fbar - (3*val);
24 ucl = Fbar + (3*val);
25 disp(lcl,"LCL is" );
26 disp(ucl, "UCL is");

```

---

### Scilab code Exa 13.5a Control during production of cars

```

1 X = [141 162 150 111 92 74 85 95 76 68 63 74 103 81
      94 68 95 81 102 73];
2 total = sum(X);
3 num = 20;
4 Xbar = mean(X);
5 lcl = Xbar - 3*sqrt(Xbar);
6 ucl = Xbar + 3*sqrt(Xbar);
7 disp(ucl, "UCL is");
8 disp(lcl, "LCL is");
9 for i =1:20
10     if(X(i)> ucl )

```

```

11         total = total - X(i);
12         num= num -1;
13     end
14 end
15 Xbar = total/num;
16
17 lcl = Xbar - 3*sqrt(Xbar);
18 ucl = Xbar + 3*sqrt(Xbar);
19 disp("After recomputation")
20 disp(ucl, "UCL is");
21 disp(lcl, "LCL is");
22 total = total - X(4);
23 num = num-1;
24 disp(Xbar, "Xbar is");
25 disp(X(4), " is");
26 Xbar = total/num;
27 lcl = Xbar - 3*sqrt(Xbar);
28 ucl = Xbar + 3*sqrt(Xbar);
29 disp("After second recomputation")
30 disp(ucl, "UCL is");
31 disp(lcl, "LCL is");
32 disp(Xbar, "It appears that the process is in
control with mean");
33
34 //The mean after the second recomputation is
incoreectly calculated in the textbook. It should
be ((17*84.41)-111 )/16 = 82.748 whereas the
value given in the book is 82.56. The values of
UCL and LCL change accordingly.

```

---

### Scilab code Exa 13.6b Service Time

```

1 X = [48 52 70 62 57 81 56 59 77 82 78 80 74 82 68
      84];
2 u = 62;

```

```

3 n = 4;
4 sigma = 24;
5 alpha = 0.25;
6 W = zeros(17);
7 W(1) = 60;
8 for i =2:17
9     W(i) = (0.25*X(i-1)) + (0.75*W(i-1));
10 end
11 disp(W , "The values of W are")
12 val = 3*sigma*sqrt(alpha/(n*(2-alpha)));
13 lcl = u- val;
14 ucl = u+ val;
15 disp(lcl , "LCL is");
16 disp(ucl , "UCL is");

```

---

### Scilab code Exa 13.6c Exponentially weighted moving average control

```

1 X = [9.617728 10.25437 9.867195 10.79338 10.60699
      10.48396 13.33961 9.462969 10.14556 11.66342
      11.55484 11.26203 12.31473 9.220009 11.25206
      10.48662 9.025091 9.693386 11.45989 12.44213
      11.18981 11.56674 9.869849 12.11311 11.48656];
2 t = 1:1:26;
3 alpha = 2/9;
4 val = 9.915051 - (alpha*X(1));
5 val = val/(1-alpha);
6 disp(val , "val is");
7 u = 10;
8 n = 5;
9 sigma = 2;
10
11 W = zeros(26);
12 W(1) = 10. ;

```

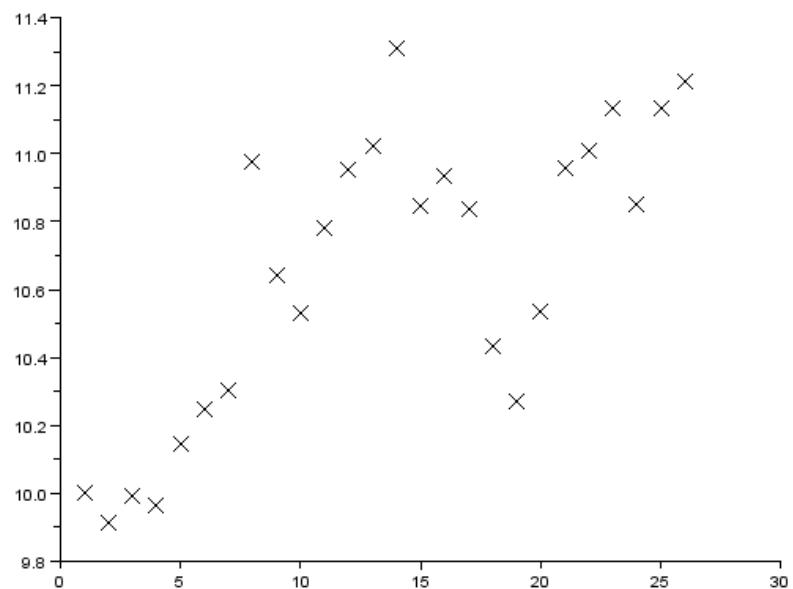


Figure 13.3: Exponentially weighted moving average control

```

13 for i =2:26
14     W(i) = (alpha*X(i-1)) + ((1-alpha)*W(i-1));
15 end
16 disp(W , "The values of W are");
17 val = 3*sigma*sqrt(alpha/(n*(2-alpha)));
18 lcl = u- val;
19 ucl = u+ val;
20 disp(lcl, "LCL is");
21 disp(ucl, "UCL is");
22 plot2d(t,W, -2);
23 xlabel("t");
24 ylabel("W");
25 nlcl = ones(1, 26);
26 nlcl= nlcl.* lcl;
27 plot2d(t,nlcl);
28 nucl = ones(1, 26);
29 nucl= nucl.* ucl;
30 plot2d(t,nucl);
31
32 //The asymptotic lines for UCL and LCL have been
    plotted

```

---

### Scilab code Exa 13.6d Finding control limit

```

1 X = [29 33 35 42 36 44 43 45];
2 u =30;
3 sig = 8;
4 d =0.5;
5 B =5;
6 Y = X - u - (d*sig);
7 S = zeros(9);
8 S(1) =0;
9 for i=2:9
10     S(i)= max(S(i-1) + Y(i-1), 0);
11 end

```

```
12 disp(S, "S is")
13 cl = B*sig;
14 disp(cl)
15 answer =100;
16 for i=1:9
17     if(S(i)>cl)
18         answer = i;
19     end
20 end
21 disp("The mean has increased after observing the ")
22 disp(answer-1);
23 disp(" subgroup average");
```

---

# Chapter 14

## Life Testing

Scilab code Exa 14.3a Lifetime of a transistor

```
1 total =50;
2 failure = 15;
3 alpha = 0.05;
4 t =525;
5 val1 = cdfchi("X", 2*failure, alpha/2 , 1-(alpha/2))
;
6 val2 = cdfchi("X", 2*failure, 1-alpha/2 , (alpha/2))
;
7
8 int1 = 2*t/val1;
9 int2 = 2*t/val2;
10 disp("The 95% confidence interval is");
11 disp(int2);
12 disp(int1, "to");
13
14 //The confidence interval is from 22.35 to 62.17
    whereas my solution in Scilab is 22.35 to 62.53
15 because of the difference in the value of chi-square
    (0.975, 30). The textbook says the value is 16.89
16 whereas scilab calculates its value as 16.79
```

---

### Scilab code Exa 14.3b Lifetime of Battery

```
1 t = 1800;
2 theta = 150;
3 r = 20;
4 pvalue = cdfchi("PQ", 2*t/theta, 2*r );
5 disp(pvalue, "P-value is ")
```

---

### Scilab code Exa 14.3c One at a time sequential test

```
1 T = 500;
2 alpha = 0.05;
3 r = 10;
4 val1 = cdfchi("X", 2*r, 1-alpha/2, alpha/2);
5 val2 = cdfchi("X", 2*r, alpha/2, 1- alpha/2);
6 int1= 2*T/val1;
7 int2= 2*T/val2;
8 disp("The 95% confidence interval is");
9 disp(int1);
10 disp(int2, "to");
11
12 //The confidence interval is from 29.27 to 103.52
    whereas my solution in Scilab is 29.265774 to
13 104.26683 because of the difference in the value of
    chi-square(0.975, 30). The textbook says the
    value is
14 9.66 whereas scilab calculates its value as
    9.5907774 .
```

---

### Scilab code Exa 14.3d Lifetime of semiconductors

```
1 r = 30;
2 T = 600;
3 theta = 25;
4 val1 = cdfchi("PQ", 2*T/theta, 2*r);
5 val2 = 1- cdfchi("PQ", 2*T/theta, 2*(r+1));
6 pvalue = min(val1, val2);
7 disp(pvalue, "The pvalue is");
8 disp("H0 would be accepted when the significance
level is 0.10");
```

---

### Scilab code Exa 14.3e Bayes estimator

```
1 X = [5 7 6.2 8.1 7.9 15 18 3.9 4.6 5.8];
2 Y= [3 3.2 4.1 1.8 1.6 2.7 1.2 5.4 10.3 1.5];
3 t = sum(X)+sum(Y);
4 R =10;
5 a = 20;
6 b = 2;
7 estimate = (R+b)/(a+t);
8 disp(estimate, "Bayes estimate of lambda is");
```

---

### Scilab code Exa 14.4a Lifetime of items produced by two plants

```
1 Xlife = 420;
2 Ylife = 510;
3 Xnum= 10;
4 Ynum =15;
5 ts = Xlife*Ynum/(Ylife*Xnum);
6 disp(ts, "The value of the test statistic is");
7 val = cdff("PQ", ts, Xnum, Ynum);
8 pvalue = 2*(1-val);
```

```
9 disp(pvalue, "The p-value is");  
10 disp("We cannot reject H0");
```

---